
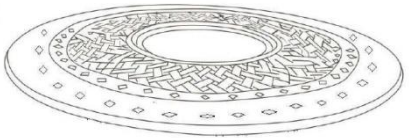

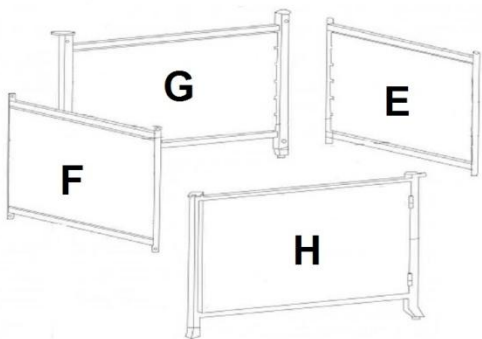


Assembly Instructions

BEFORE YOU BEGIN:

1. Identify all parts in the box against the “Parts” List.
2. Remove all protective material carefully and avoid cutting the surface of the furniture while removing wrapped material.

Part		Description	Qty
A		Table Top	1
B		Table Lid	1
C		Burner	1
D		Fire Glass	
E		Side Panel 1	1
F		Side Panel 2	1
G		Back Panel	1
H		Door Frame	1
I		Gas Tank Bracket	1
J		Hardware Pack 1: Headless Bolt, Flat Washer, Lock Washer, Nut, Nut Cap	4
K		Hardware Pack 2: Bolt, Flat Washer, Lock Washer	4
L		Hardware Pack 3: Long Bolt, Flat Washer, Lock Washer	8



Assembly Instructions

ATTENTION:

1. **DO NOT** use power tools or over-tighten hardware during assembly.*



*Aluminum is soft metal, so over-tightening may strip threads or break the parts.

2. Please read these instructions carefully before assembling.



3. During assembly, place furniture against soft surfaces to avoid scratching the paint/ metal.

ASSEMBLY STEPS:

1. Connect all 4 panels [**SIDE PANEL 1 (E)**, **SIDE PANEL 2 (F)**, **BACK PANEL (G)**, and **DOOR FRAME (H)**] together using 8 x Long Bolts, Flat Washers, and Lock Washers from **HARDWARE PACK 3 (L)**.

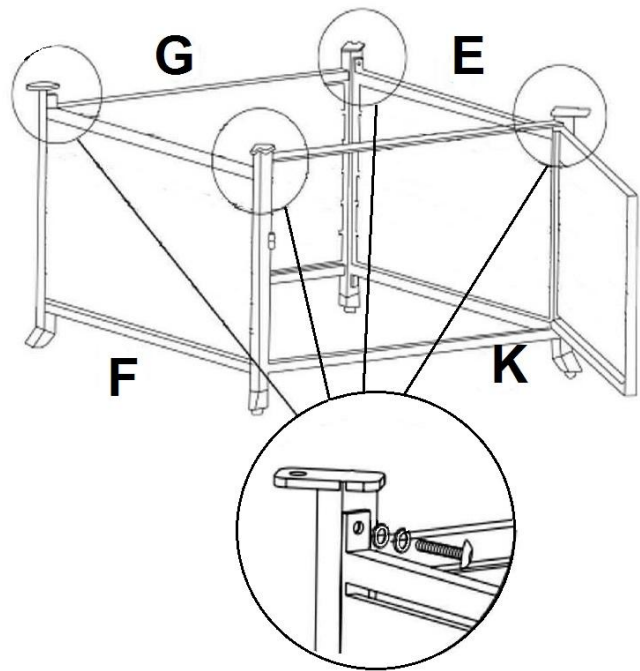
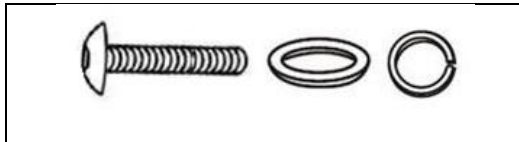


2. Connect the **GAS TANK BRACKET (I)** to the unit using 4 x Bolts, Flat Washers, and Lock Washers from **HARDWARE PACK 2 (K)**.

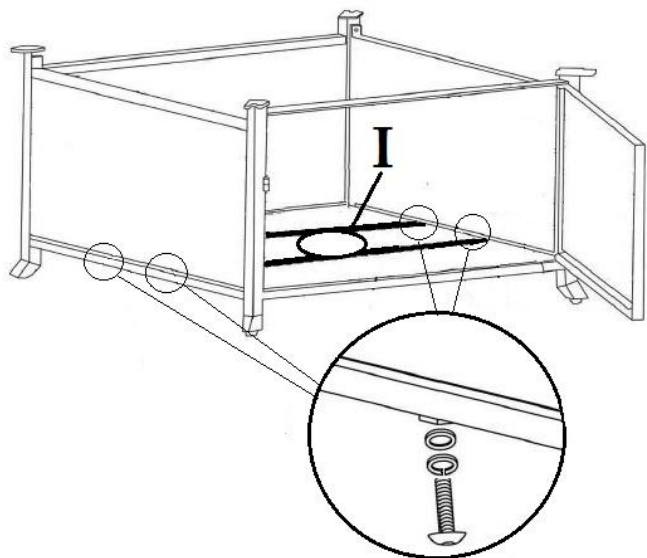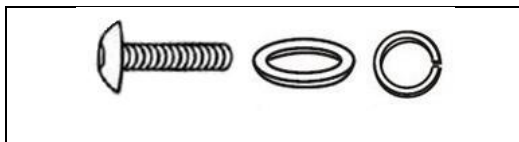


3. Screw in the 4 x Headless Bolts from **HARDWARE PACK 1 (J)** to the underside of the **TABLETOP (A)**.

Then, secure the **TABLETOP (A)** to the assembled panels using 4 x Flat Washers, Lock Washers, Nuts, and Nut Caps from **HARDWARE PACK 1 (J)**.

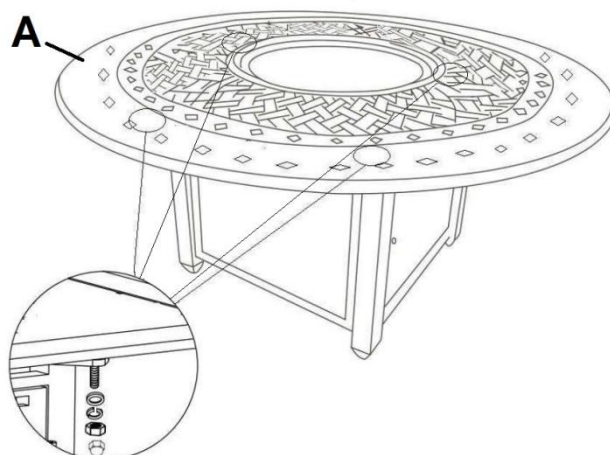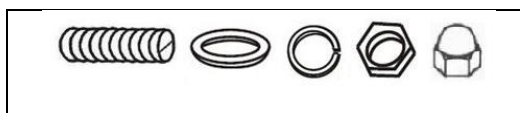

4. Place the **BURNER (C)** into the **TABLETOP**.
5. Connect the hose and regulator from the burner to your propane tank.
6. Follow the “**Burner Instructions**” below to set up the burner and test the flame.
7. When the fire pit is not in use, cover it with a **TABLE LID (B)**.

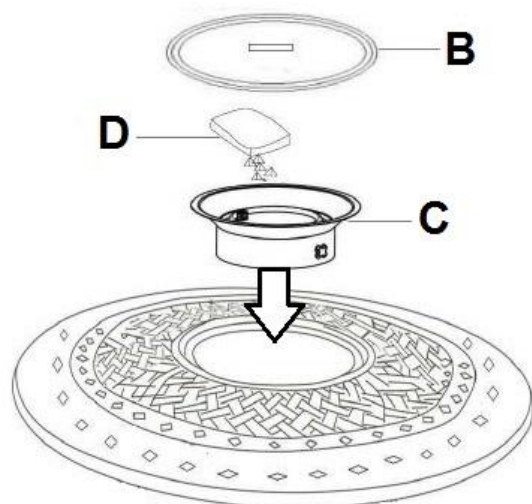

BURNER INSTRUCTIONS:

1. Before lighting the burner, make sure that the gas holes are not covered by glass or other decorative items.
2. Push in the knob, turn it halfway, and hold for approximately 15 seconds to allow the gas to flow through the tube. Then, turn the knob all the way on.
3. Use a BBQ lighter to light the burner when turning the knob to the “On” position.
4. Once the flame is lit, then you may cover the burner with **FIRE GLASS (D)** or other decorative items.

CARE INSTRUCTIONS:

Please DO NOT use acid or alkaline washing liquids to clean this product. Harsh cleaners can cause the powder-coated finish to stain and fade. Use a soft towel with mild liquid soap and water to clean the product, and dry with a soft cloth.

