


What's included




What's Required

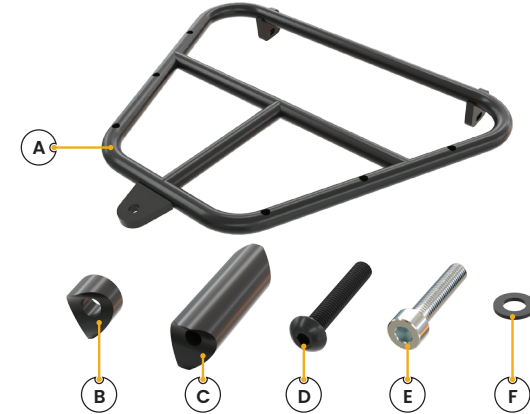

#	INCLUDED ITEMS	QTY	DESCRIPTION
A	Pannier adapter	2	
B	Short spacer	20	Use on the fork and fender strut.
C	Long spacer	4	Use on the fender strut
D	M5 x 30 mm bolt	10	Outside mounting bolt
E	M5 x 25 mm bolt	4	Inside mounting bolt
F	M5 washer	14	
#	REQUIRED ITEMS	QTY	DESCRIPTION
G	Your Globe 0-10 Nm torque wrench	1	Use the torque wrench supplied with your Globe bicycle to tighten the bolts to specification.
H	4 mm hex bit	1	Used on the M5 x 30 mm bolt.
I	3 mm hex bit	1	Used on the M5 x 25 mm bolt.


Assembly Instructions

The front pannier adapters are mounted to the fork and the front fender struts.

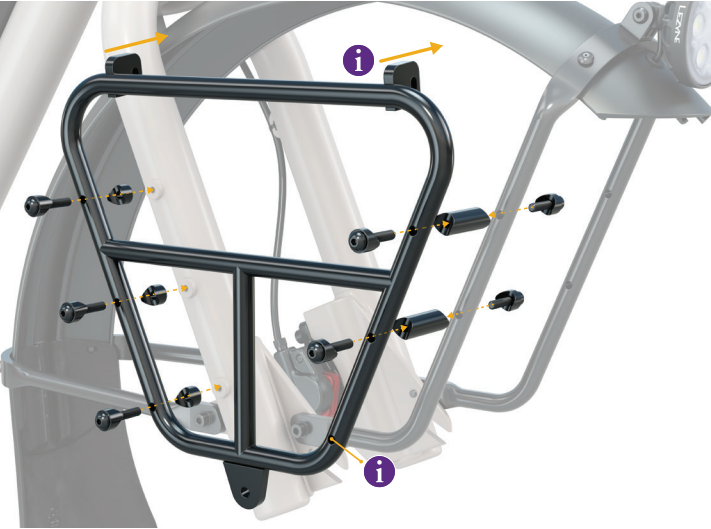


The following instructions guide you through assembling the front pannier adapter safely to your bicycle.

- i** Removing the front wheel may be necessary for the assembly of the front pannier. Please see the user manual for more information on wheel removal and replacement.
- i** Racks are side-specific. The square upper extensions should face inward.
- i** The lower mounting hole on the adapter will not be used.

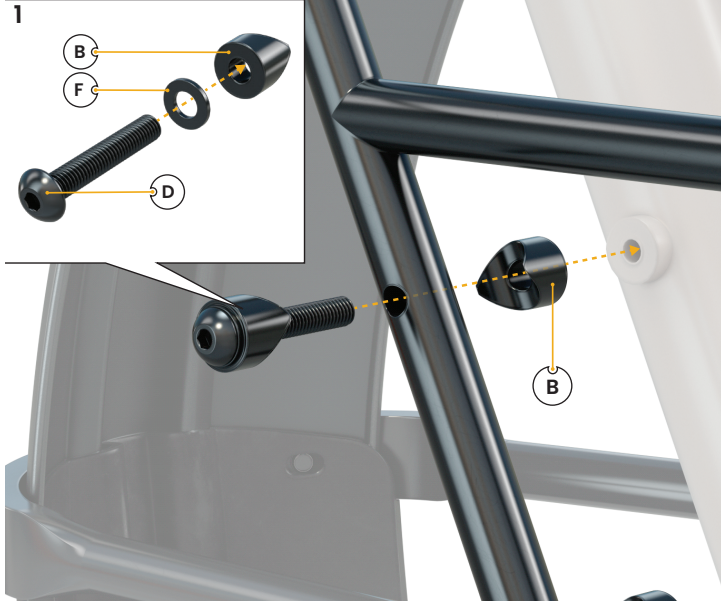

- Slide a washer (F) and short spacer (B) onto a 30 mm bolt (D).
- Insert the bolt assembly through the upper the fork-side hole of the adapter.
- Add a second short spacer (B) between the fork and the adapter then lightly thread the bolt into the fork mount.
- Repeat the process for the remaining two fork mounts. **Do not tighten the bolts yet.**

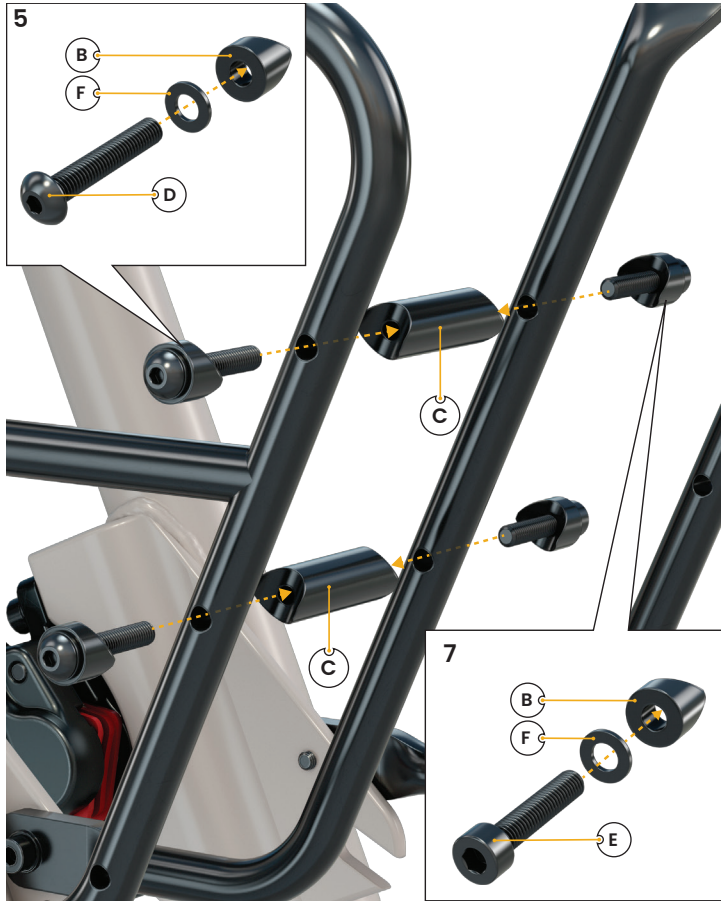

- Slide a washer (F) and short spacer (B) onto a 25 mm bolt (E).
- Insert the bolt assembly from the back through the fender strut into the large spacer and lightly tighten.
- Repeat the process for the middle fender mount.
- Using the small Globe torque wrench and 4 mm hex bit, tighten all the inner bolts to 6.2 Nm / 55 in-lbf .
- Using the small Globe torque wrench and 3 mm hex bit, tighten all the outer bolts to 5 Nm / 44 in-lbf.
- Repeat all the steps on the opposite pannier adapter.

Steering Clearance

When attaching any front panniers, make sure to not restrict bicycle's steering abilities. Panniers should be positioned on the adapter so that they do not contact the ground under normal riding conditions.



Warning: We do not test third-party accessories for safety and compatibility. Installation and use of these accessories are at your own risk.



All Globe accessories are available at www.globebikes.com

Safety Information



WARNING! The Globe pannier adapter is intended for use on Globe bicycles only.



WARNING! Panniers and racks, especially when loaded, affects the handling of your bicycle by altering the center of gravity, weight, and balance. When installing and loading the Globe pannier adapter, ensure the accessories are evenly spaced and loaded.

Before your first ride, you should practice riding in a controlled environment with the pannier adapter fully loaded.



WARNING! Before each ride, ensure the pannier adapters are securely installed and any accessory is securely attached. Loose components or cargo could cause you to lose control and fall.



WARNING! Do not attach any cargo to the bicycle that could interfere with passing traffic, obstacles, or pedestrians.



WARNING! Never exceed the maximum allowed cargo weight for your bicycle/fork or the rack's maximum allowed cargo weight limit. However, the weight limit of the accessory may be lower. Always adhere to the lower of the weight limits of either the rack or the accessory. See the below table for the Globe bicycle racks and fork weight limit guidelines. The maximum weight for the pannier adapter is 8kg / 18 lbs.



WARNING! The Globe pannier adapter is tested for safety and compatibility with Specialized panniers. Use of third-party accessories is at your own risk.



WARNING! Before your first ride and regularly thereafter, ensure the pannier adapter bolts are tightened to specification.



WARNING! Never attach any bags, equipment, or objects onto your bicycle that may interfere with the handling of your electric bicycle, causing you to lose control and fall and resulting in severe injury or death. Make sure all accessories are properly installed and secured.

Maximum Weight Limits

MODEL	CARGO
	(lb / Kg)
Front pannier adapter	18 / 8 (per Side)

Torque Specifications

COMPONENTS	TOOL	TORQUE	
		Nm	in-lbf
Outer mounting bolt M5 x 30 mm	Torque wrench & 3 mm hex bit	5	44
Inner mounting bolt M5 x 25 mm	Torque wrench & 4 mm hex bit	6.2	55

Online Video Guides

An informative and important video explaining how to properly assemble the Globe front pannier adapter is available by scanning the QR code. This assembly/setup guide is intended to be used together with the video.



SPECIALIZED BICYCLE COMPONENTS

15130 Concord Circle, Morgan Hill, CA 95037 (408) 779-6229

0000189520_AG_R1 06/22

We may occasionally issue updates and addendums to this document.

Please periodically check www.globebikes.com or contact Rider Care to make sure you have the latest information. Info: 877-808-8154

Globe Front Pannier Adapter

Assembly Guide

