


BATHOLOGY

rediscover bathing

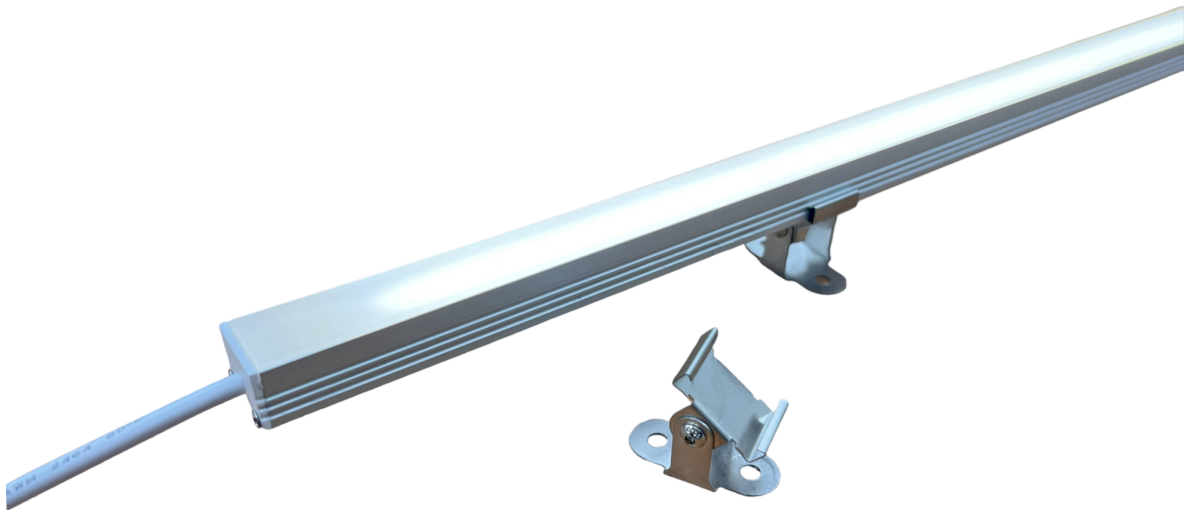

Spectrum 360

Installation and Operation Manual

Spectrum 360

by BATHOLOGY



Figure 1: Table 1: Spectrum 360 Specifications

Kelvin: 3500 K	Operating Temp: -13 F to 195 F	Max Run: 4 Light Bars / 20 Linear Feet	IP Rating: IP67		
LED light bar is suitable for use in sauna environments. LED light bar is IP67 rated for outdoor saunas. LED light bar is not for commercial use.					
	Operating Voltage (VDC)	Power Consumption (Watts)	Lumens	Dimensions (in.) (with Flush Clips)	Dimensions (in.) (with Adjustable Clips)
Brilliance 360-12 LED White	24	2.4	270	3/4W x 12L x 9/16H	3/4W x 12L x 1-1/4H
Brilliance 360-24 LED White	24	5.4	596	3/4W x 24L x 9/16H	3/4W x 24L x 1-1/4H
Brilliance 360-36 LED White	24	8.3	921	3/4W x 36L x 9/16H	3/4W x 36L x 1-1/4H
Brilliance 360-48 LED White	24	11.3	1,246	3/4W x 48L x 9/16H	3/4W x 48L x 1-1/4H
Brilliance 360-60 LED White	24	14.2	1,571	3/4W x 60L x 9/16H	3/4W x 60L x 1-1/4H

Figure 2: Table 2: Dimmer Switch Specifications

Operating Voltage	Maximum Wattage	Dimming Range	Diameter	Depth	Rough-in Cutout	IP Rating
24 VDC	72 Watts	1-100%	3/4" Body / 15/16" Trim	13/16"	3/4"	IP 20

**Figure 3: Table 3:
Power Supply Specifications**

Operating Voltage	Output Voltage	Power Consumption	Nominal Amperage	Dimensions
120 VAC	24 VDC	90 Watts	1.3 Amps	2.36W x 5.70L x 1.25H

Warning

Do not hot swap any of the components of this system. Hot swapping can cause damage to the system or harm to the user.

Warning

Do not modify any components of this system. Modifying components of this system can cause system failure or harm to the user.

Important

Brilliance LED fixture should not be installed directly above Sauna Heater or in a location where Brilliance fixture will exceed maximum temperature of 195°F.

Important

For sauna interior mounting, the dimmer switch should not be located within a 30" radius of the heat source and should be a maximum of 36" above the finished floor.

Warning

Locating the dimmer switch too close to the heat source or too high in the room could cause damage to the switch.

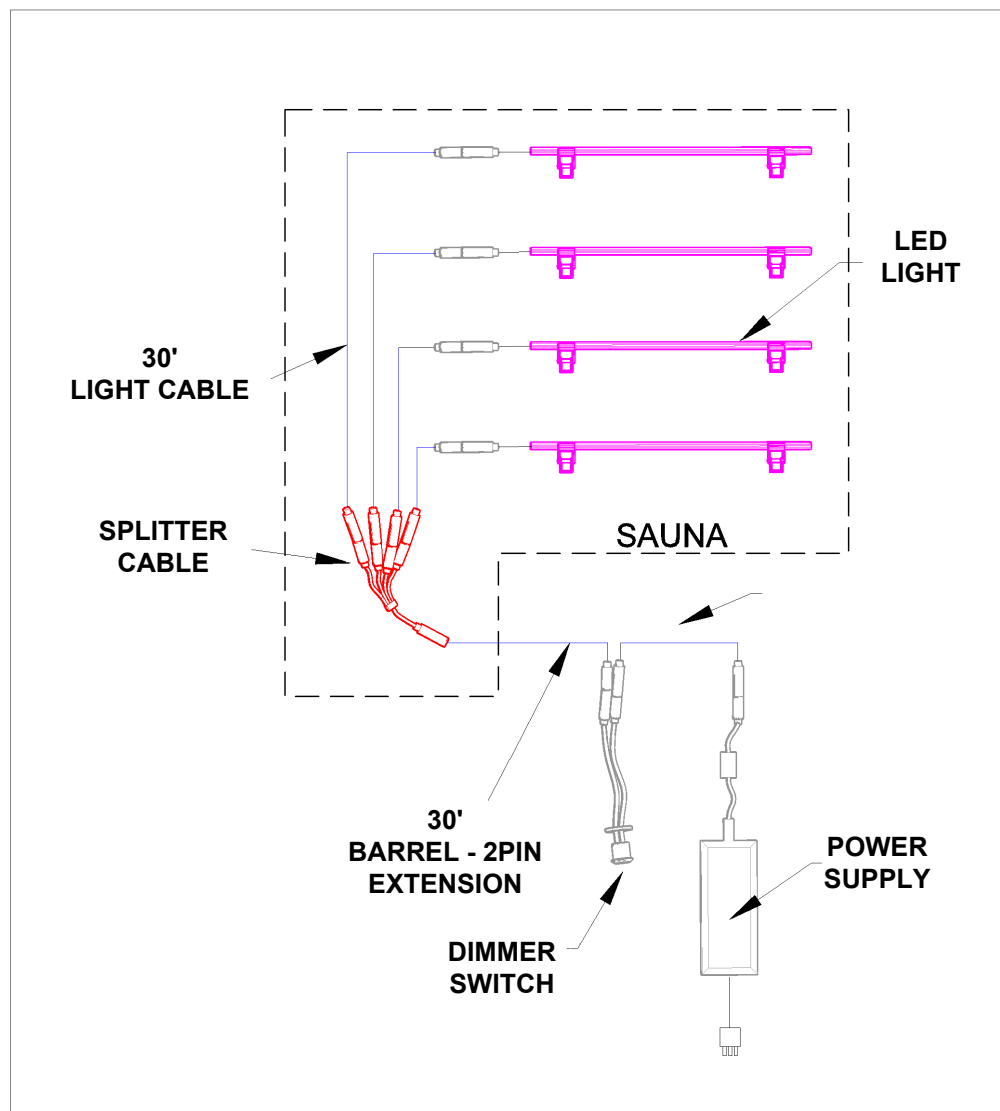


Figure 4: Connections Diagram

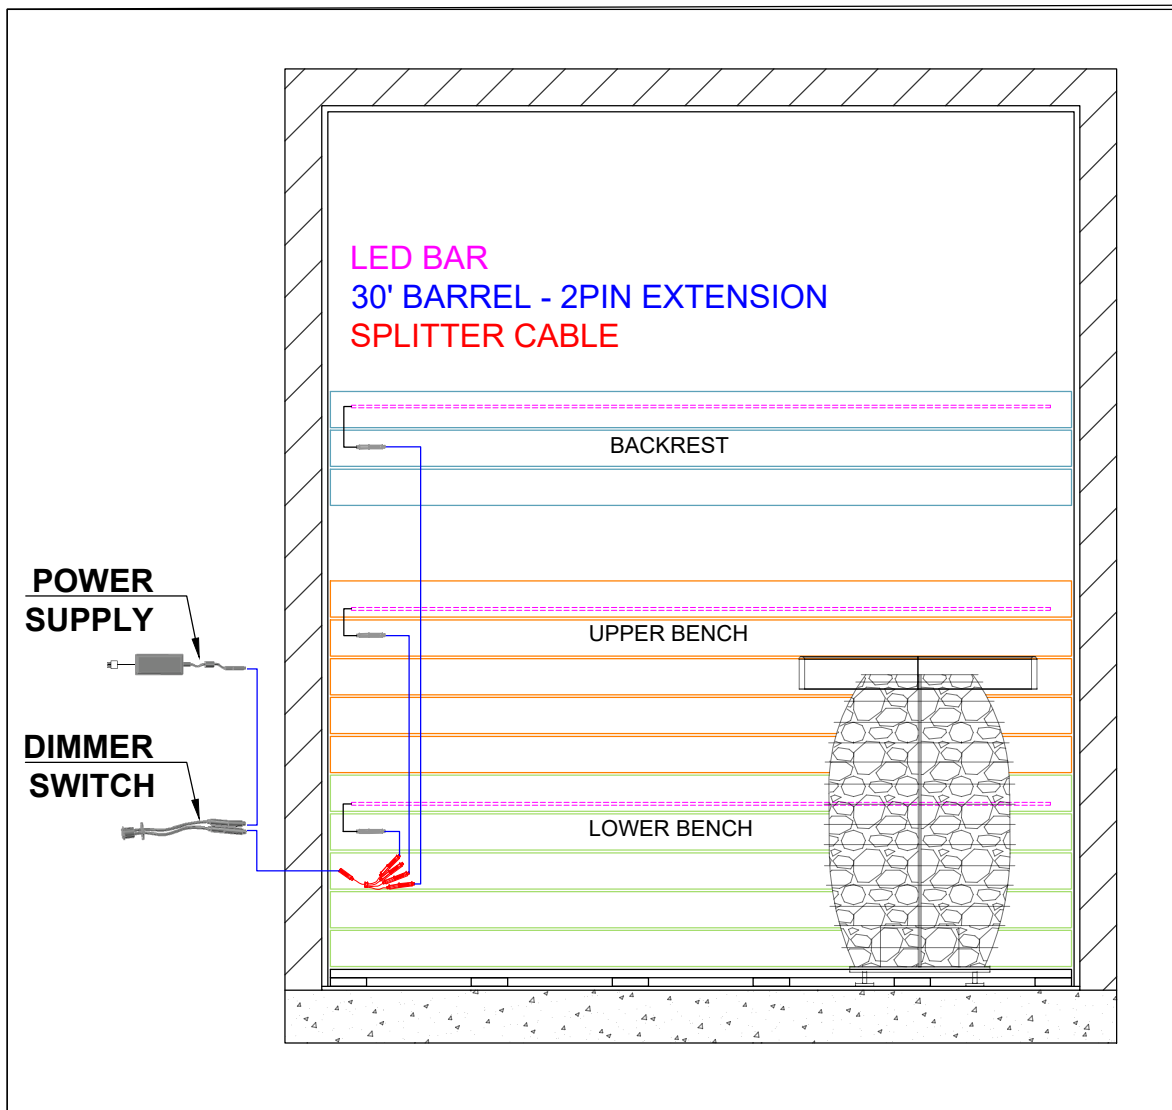


Figure 5: Connections Diagram 2

Warning

The dimmer should only be mounted using the methods described in this manual. Mounting the dimmer using methods other than those described in this manual could cause damage to the dimmer or harm to the user.

Dimmer Switch Mounting Instructions

Drill a $\frac{3}{4}$ " hole in the mounting surface. Insert the barrel connectors and cables through the hole. Insert the dimmer switch into the hole and fasten it to the surface using the provided nut.

DIMMER Switch Operation

- Tap for On/Off
- Hold for Dim/Brighten

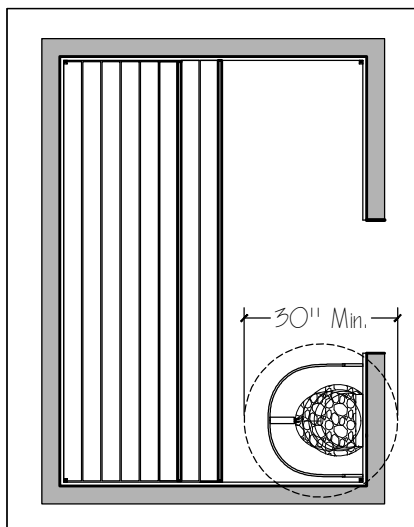


Figure 6: Dimmer Switch Location Top View

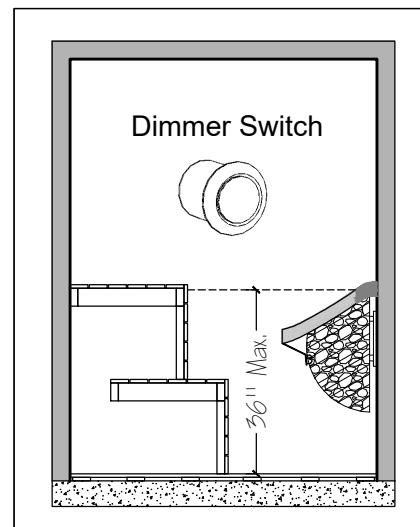


Figure 7: Dimmer Switch Location Elevation View

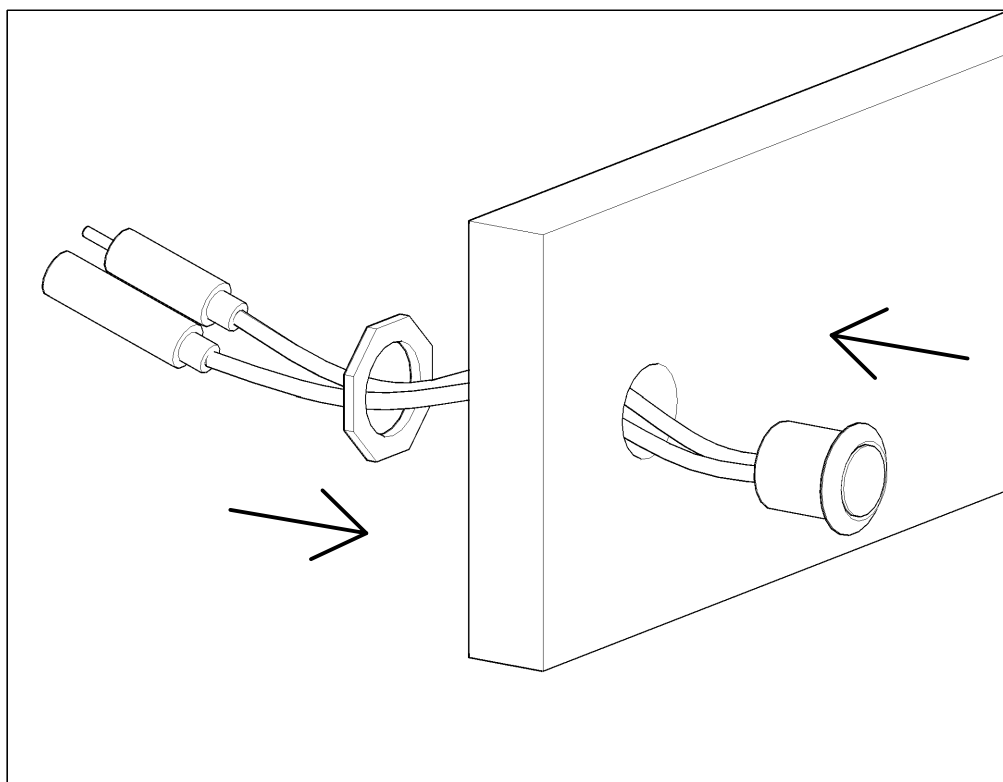


Figure 8: Dimmer Mounting

Warning

The LED should only be mounted using the methods described in this manual. Mounting the LED using methods other than those described in this manual could cause damage to the LED.

LED Mounting Instructions

1. Determine the desired location for the LED.
2. Screw the mounting clips to the mounting surface.
3. Attach the LED to the mounting clips by snapping it into place.
4. If using the adjustable clips, tilt the LED bar for the desired light display.

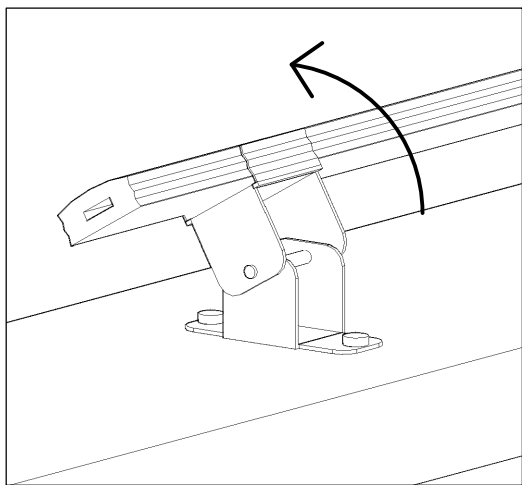


Figure 10: LED Tilting

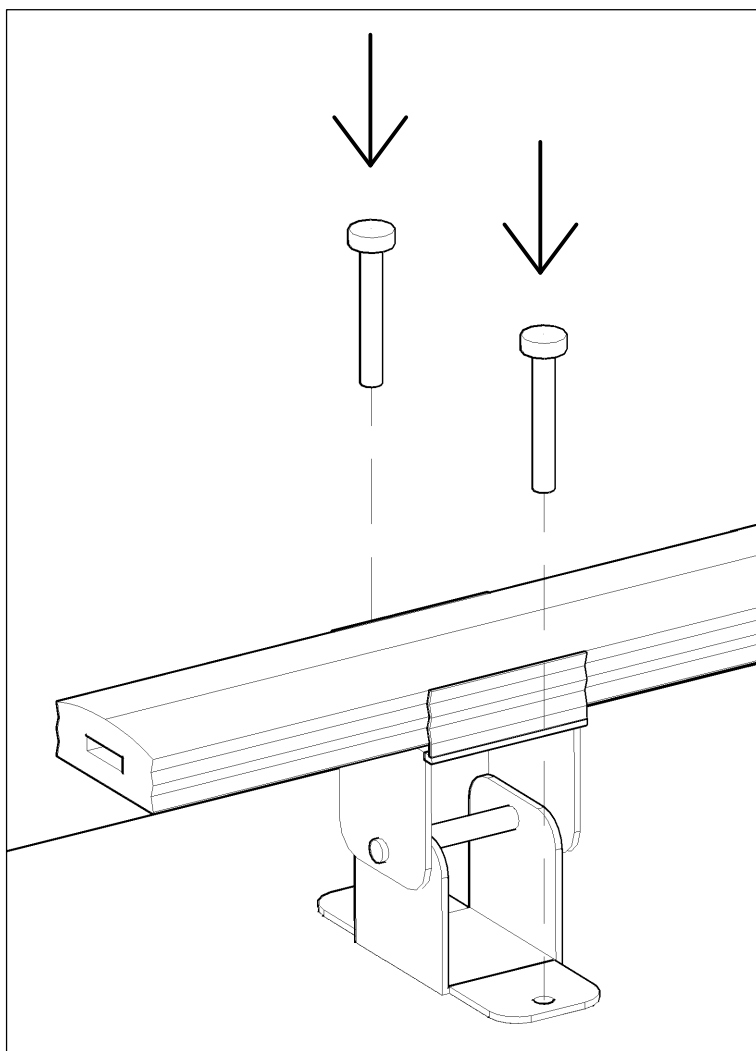


Figure 9: LED Mounting



Figure 11: Tilt Variations

BATHOLOGY

Technical Support
(800) 957-2862

REV: 031023

© 2023 Bathing Brands, Inc.