

Aftersale Service:

whatsapp/phone: +86 13044219654

email: support@hansshow.com

Note:


- 1.The installation instructions may differ slightly from the actual operation. If there are any differences, please follow the actual situation or contact us.
- 2.Warning: Please do not disassemble any part by yourself, any improper operation will not be covered by our warranty.

Warm Prompt

If the vehicle is found to have inoperable fault or other serious fault, pls contact Tesla's after-sales department for maintenance.

In order to avoid Tesla blaming the problems on the installed products, please remove the products first, and then go to Tesla's after-sales department for maintenance.

Otherwise, if not remove the products, Tesla will charge maintenance fees, which shall be borne by yourself.

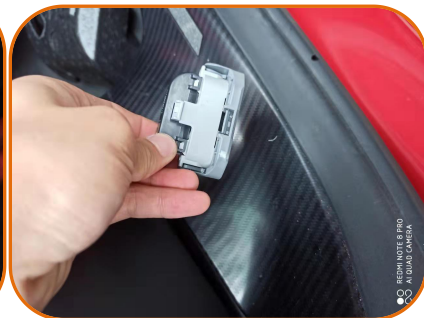

Note: Before installing the product, please do the following steps:

1. Turn off the power on Tesla screen;
2. Disconnect the negative pole of 12V power supply at the frunk;
3. Finally, disconnect the high-voltage gray plug under the right side of the rear seat. Otherwise, it will cause window lifting fault, door fault, or screen fault code.

Installation steps

Before installing the product, please turn off the power supply on the screen first, then disconnect the gray DCDC plug under the right rear seat, and then disconnect the negative pole of the battery in the frunk. Otherwise, it will cause window lifting fault, door fault, or screen fault code.




1. Turn off the host power in the vehicle setting.




2. Remove the negative pole of the small battery on the Frunk



3. Open the rear seat cushion and unplug the power plug

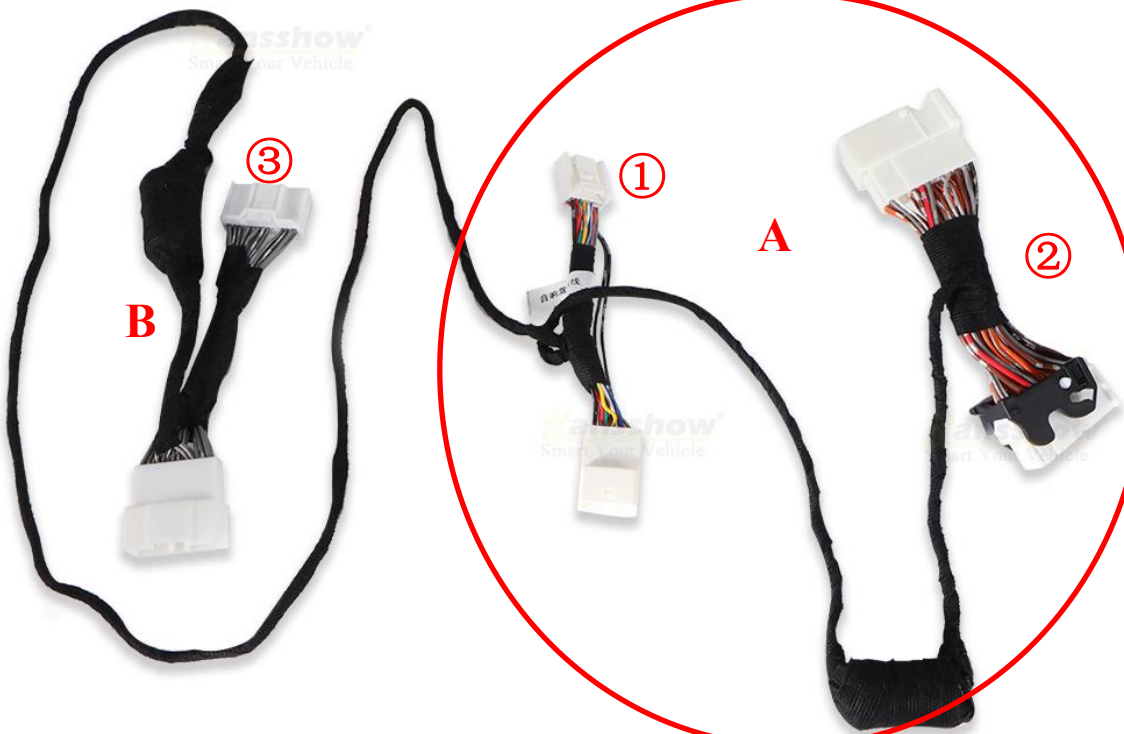

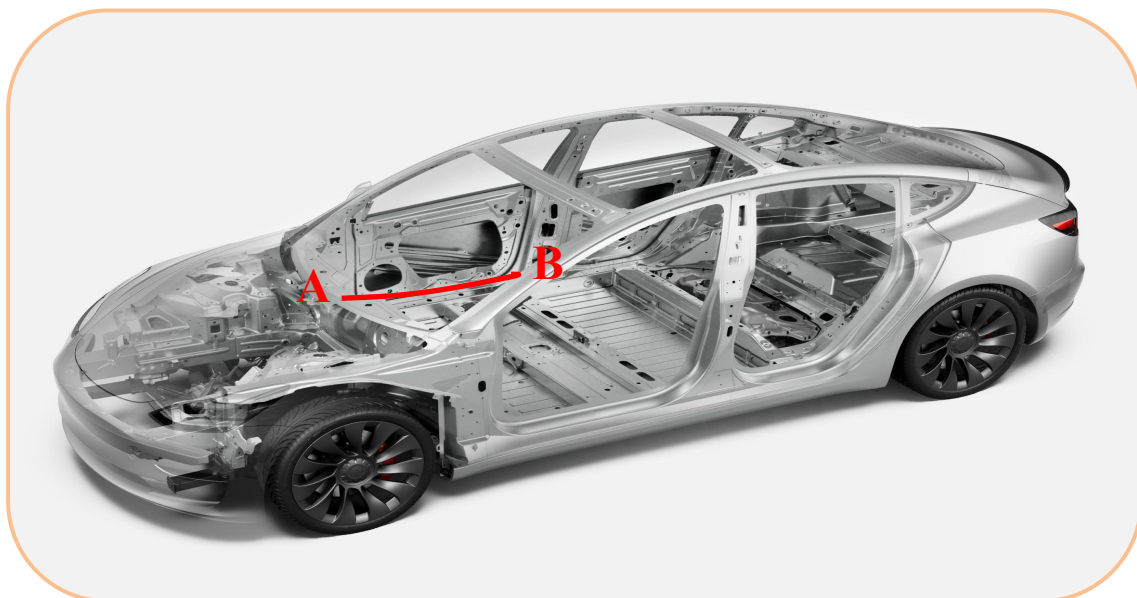

The red line is the wiring diagram of the harness, and AB has plugs to be transferred. See the schematic diagram for details



4. Area A and B is the position of the plug, and the red line is the wiring harness routing position




5. First remove the screws and buckles from the guard board on the front passenger foot socket, and then remove the guard board



6. After removing the knee pad at the front passenger's position, transfer the penultimate black plug of the host to plug ①



7. Find the main plug of the right door on the right side of the foot socket under the A-pillar of the front right seat and transfer it to plug ②

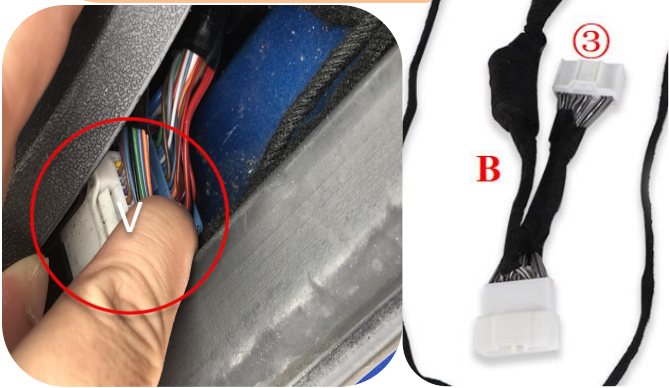

8. Connect the plug ③ to the plug of the cover plate under the passenger side B pillar

9. Find the plug as shown in the figure on the cover plate under the passenger's B-pillar and transfer it to plug ③