


INSTALLER FRIENDLY SERIES® (IFS)

THREE PHASE SIMPLEX

Demand Dose or Timed Dose, Float or C-Level™ Sensor Controlled System for Pump Control and System Monitoring

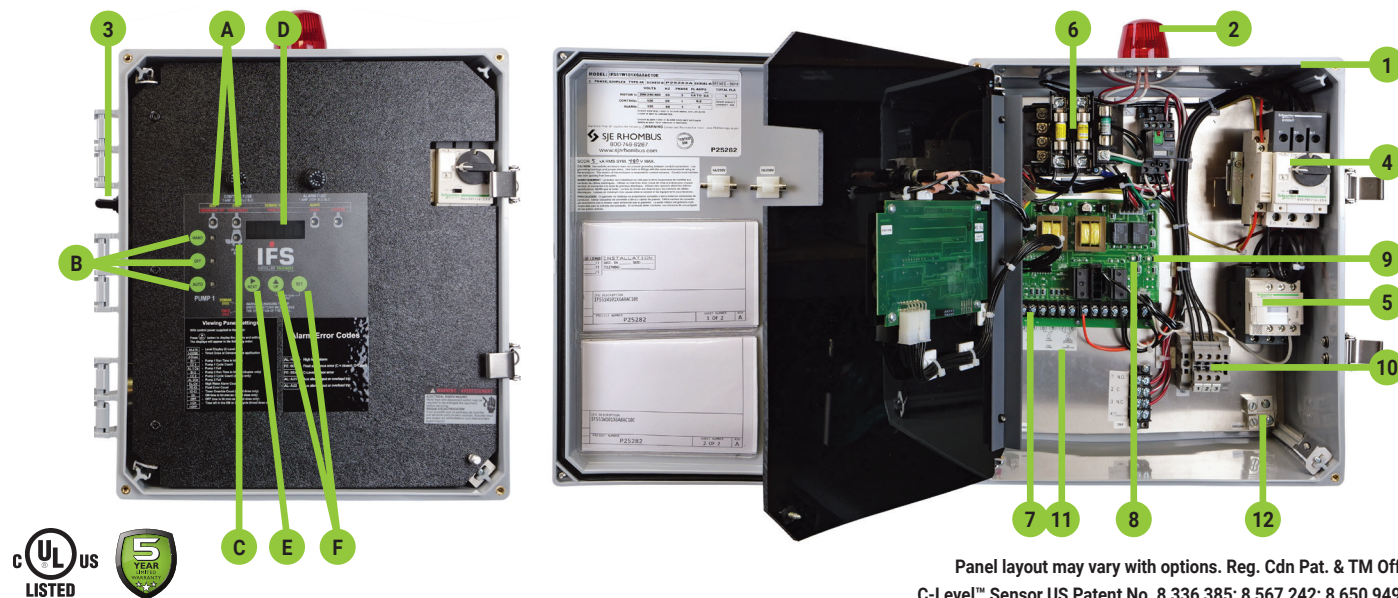

The IFS simplex control panel utilizes an innovative circuit board design to control one 208/240/480 VAC three phase pump in water and sewage applications. IFS panels feature an easy-to-use touch pad on inner door for programming and system monitoring. The panel configuration can be easily converted in the field to either a timed dose or demand dose. Available with the EZconnex® float system.

The panel can utilize the C-Level™ sensor for continuous level monitoring. It senses the level in the tank and sends a signal to the panel. Pump activation levels can be adjusted by using the panel touch pad. C-Level™ CL40 sensor operating range is 3-39.9 inches (7.6-101.3 cm). C-Level™ CL100 operating range is 3-99.5 inches (7.6-252.7 cm).

TOUCH PAD FEATURES

- A. Level Status indicators illuminate when floats or set points are activated; alarm will activate if a float operates out of sequence
- B. HOA (Hand-Off-Automatic) buttons control pump mode with indication; Hand mode defaults to Automatic when stop level or redundant off level is reached
- C. Pump Run indicator will illuminate when pumps are called to run
- D. LED Display for system information including: level in inches or centimeters (C-Level™ only), mode, pumps elapsed time (hh:mm), events (cycles), alarm counter, float error count, timed dose override counter (timed dose only), and ON/OFF times (timed dose only)
- E. NEXT push button toggles display
- F. UP and SET push buttons set pump ON/OFF times (timed dose only) and activation levels (C-Level™ only)

COMPONENTS

1. Enclosure base measures 14 x 12 x 6 inches (35.56 x 30.48 x 15.24 cm); NEMA 4X (ultraviolet stabilized thermoplastic with removable mounting feet for outdoor or indoor use)
2. Red LED beacon provides 360° visual check of alarm condition
3. Exterior Alarm Test/Normal/Silence switch allows horn and light to be tested and horn to be silenced in an alarm condition; alarm automatically resets once alarm condition is cleared
4. Motor protective switch provides adjustable overload, branch circuit protection and pump disconnect
5. IEC motor contactor controls pump by switching electrical lines
6. Multi-tap transformer (208/240/480 VAC primary) provides 120 VAC control alarm voltage or 600 VAC primary transformer
7. Float connection terminal block
8. Control Power indicator/fuse indicator light illuminates if control power is present in panel; alarm will activate if control fuse is blown
9. Alarm Power indicator/fuse indicator light illuminates if alarm power is present in panel
10. Large incoming power connection terminal block
11. Terminal block float wiring label
12. Ground lugs
13. Alarm horn provides audio warning of alarm condition (83 to 85 decibel rating) (Not shown)

Note: Options, voltage, and amp range selected may change enclosure size and component layout.

Note: Schematic/Wiring Diagram and Pump Specification Label are located inside the panel.



INSTALLER FRIENDLY SERIES® THREE PHASE SIMPLEX - Demand or timed dose float controlled system for pump control and system monitoring.

IFS CONTROL PANEL	5 MODEL TYPE	1 ALARM PACKAGE	W ENCLOSURE RATING	PUMP FULL LOAD AMPS	FLOAT SWITCH APPLICATION	8AC OPTIONS (LISTED BELOW)
-------------------------	--------------------	-----------------------	--------------------------	------------------------	-----------------------------	-------------------------------

CONTROL PANEL	✓	IFS					
MODEL TYPE	✓	5	Three Phase Simplex (includes Option 8AC as standard)			\$2,326.00	
ALARM PACKAGE	✓	1	Alarm Package (includes test/normal/silence switch, fuse, red light, & horn)			Base	
ENCLOSURE RATING	✓	W	Weatherproof, NEMA 4X (engineered thermoplastic)			Base	
PUMP FULL LOAD AMPS			208/240/480V		600V		
		001	1.0 - 1.6 FLA		005	1.0 - 1.6 FLA	Base
		101	1.6 - 2.5 FLA		105	1.6 - 2.5 FLA	Base
		201	2.5 - 4.0 FLA		205	2.5 - 4.0 FLA	Base
		301	4.0 - 6.3 FLA		305	4.0 - 6.3 FLA	Base
		401	6.0 - 10.0 FLA		405	6.0 - 10.0 FLA	Base
		511	9.0 - 14.0 FLA		515	9.0 - 14.0 FLA	\$59.00
		611	13.0 - 18.0 FLA		615	13.0 - 18.0 FLA	\$59.00
		621	17.0 - 23.0 FLA		625	17.0 - 23.0 FLA	\$72.00
		701	20.0 - 25.0 FLA		705	20.0 - 25.0 FLA	\$72.00
FLOAT SWITCH APPLICATION		H	Floats - Pump Down (select Option 17 below)			Base	
		E	EZconnex® Float Switch System (select Option 33 or 34 below)			- \$102.00	
		X	No Floats			- \$102.00	
		C	C-Level™ Sensor (select Option 24 or 29) Select Option 3E and/or 4A & 4D for high water alarm and/or redundant off floats			- \$102.00	

IFS Three Phase Simplex Base Price		\$2,326.00
Alarm Package		
Enclosure Rating		
Pump Full Load Amps		
Float Switch Application		
Total Options		
TOTAL LIST PRICE		

PRICING WORKSHEET

NOTE: Pump down applications only. Industry practices suggest that a secondary device, such as a float switch, be used for redundant activation of the high level alarm and pump shut off when using the C-Level™ sensor.

OPTIONS	DESCRIPTION	LIST PRICE	OPTIONS	DESCRIPTION	LIST PRICE
3A	Alarm Flasher	\$66.00	17C	Sensor Float® / Internally Weighted (per Float) - Mercury	\$13.00
3B	Manual Alarm Reset	\$119.00	17D	Sensor Float® / Externally Weighted (per Float) - Mercury	\$15.00
3E	High Water Alarm Float (must also select Option 17) Only Available with Float Switch Application = C	\$34.00	17G	SJE MilliAmpMaster™ / Pipe Clamp (per Float) - Mechanical	\$0.00
4A	Redundant Off (must also select Option 4D if floats are required)	\$72.00	17H	SJE MilliAmpMaster™ / Externally Weighted (per Float) - Mechanical	\$8.00
4D	Redundant Off Float (must also select Option 4A and Option 17)	\$34.00	17J	Sensor Float® / Pipe Clamp (per Float) - Mercury	\$6.00
5A	Thermal Cutout/Heat Sensor Auto Reset (for pumps with thermal switch leads)	\$51.00	24E	C-Level™ CL40 Sensor with 4' Vent Tube and 20' Cord	\$349.00
5E	Seal Failure Circuit and Red Indicator (2 Wire)	\$198.00	24F	C-Level™ CL40 Sensor with 4' Vent Tube and 40' Cord	\$384.00
6A	Auxiliary Alarm Contact, Form C	\$51.00	24G	C-Level™ CL40 Sensor with 8' Vent Tube and 20' Cord	\$354.00
✓ 8AC	Display Board - Includes: ETM Counter, Events (Cycles) Counter, Alarm Counter (included as standard)	\$0.00	24H	C-Level™ CL40 Sensor with 8' Vent Tube and 40' Cord	\$390.00
10E	Lockable Latch - NEMA 4X	\$51.00	24X	No C-Level™ CL40 Sensor	\$0.00
10G	Lightning Arrestor	\$247.00	29A	C-Level™ CL100 Sensor with 10' Vent Tube and 20' Cord	\$359.00
10K	Anti-condensation Heater	\$124.00	29B	C-Level™ CL100 Sensor with 10' Vent Tube and 40' Cord	\$396.00
11C	Additional NEMA 1 Remote Alarm Panel (must also select Option 6A)	\$114.00	29X	No C-Level™ CL100 Sensor	\$0.00
11D	Additional NEMA 4X Remote Alarm Panel (must also select Option 6A)	\$368.00	33D ■	EZconnex® 3-Port, 25', with 10' Floats (3) / Pipe Clamp	\$313.00
16A	10' Cord in Lieu of 20' Cord (per Float)	-\$3.00	33E ■	EZconnex® 3-Port, 50', with 10' Floats (3) / Pipe Clamp	\$355.00
16B	15' Cord in Lieu of 20' Cord (per Float)	-\$2.00	33G ■	EZconnex® 3-Port, 25', with 20' Floats (3) / Pipe Clamp	\$337.00
16C	30' Cord in Lieu of 20' Cord (per Float)	\$6.00	33H ■	EZconnex® 3-Port, 50', with 20' Floats (3) / Pipe Clamp	\$379.00
16D	40' Cord in Lieu of 20' Cord (per Float)	\$18.00	34D ■	EZconnex® 4-Port, 25', with 10' Floats (3) / Pipe Clamp, Sealing Plug	\$400.00
			34E ■	EZconnex® 4-Port, 50', with 10' Floats (3) / Pipe Clamp, Sealing Plug	\$454.00
			34G ■	EZconnex® 4-Port, 25', with 20' Floats (3) / Pipe Clamp, Sealing Plug	\$423.00
			34H ■	EZconnex® 4-Port, 50', with 20' Floats (3) / Pipe Clamp, Sealing Plug	\$476.00

■ EZconnex® mechanically-activated, narrow angle float switches with quick release connections

