


ASSEMBLY INSTRUCTIONS

ITEM NO.


164WAITRS1BK
164WAITRS1WL




PART LIST:

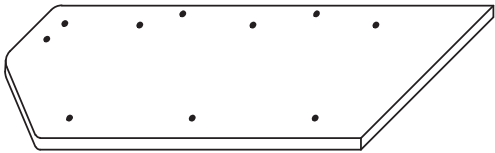


(1)/1PC
Left Side Board
SIZE: 43in. x 23in.

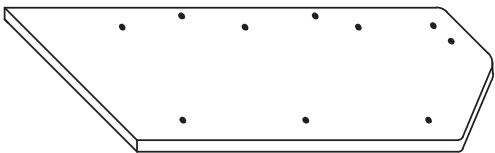


(2)/1PC
Right Side Board
SIZE: 43in. x 23in.




(3)/1PC
Top Ledge
SIZE: 24in. x 8in.

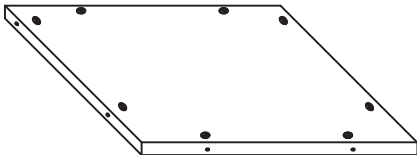


(4)/1PC
Top Shelf
SIZE: 24in. x 21in.

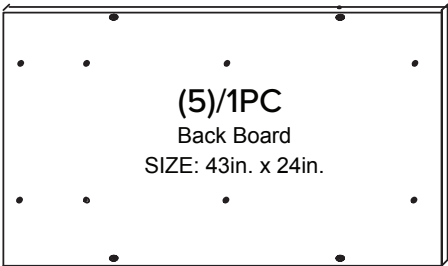


(5)/1PC
Back Board
SIZE: 43in. x 24in.

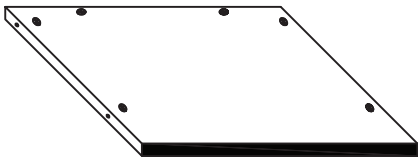


(6)/1PC
Middle Shelf
SIZE: 24in. x 21in.

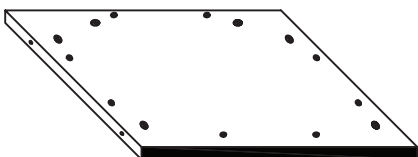


(7)/1PC
Bottom Shelf
SIZE: 24in. x 21in.

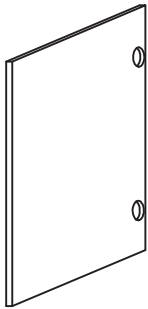


(8)/2PC
Cabinet Doors
SIZE: 19in. x 12in.



(9)/1PC
Top Shelf Ledge
SIZE: 24in. x 2in.



(10)/2PC
Base Board A
SIZE: 19in. x 4in.




(11)/2PC
Base Board B
SIZE: 23in. x 4in.

HARDWARE LIST:



(A)
Cam Lock
Screw (46PCS)



(B)
Hinge (4PCS)



(C)
Screws
(24PCS)




(D)
Cam Lock
(46PCS)



(E)
Magnetic Door
Catch (2PCS)


TOOLS REQUIRED:



Phillip's Head Screwdriver (not included)


STEP 1.

Screw cam lock screws (Ax28) onto left and right side boards (1) and (2) and back board (5).

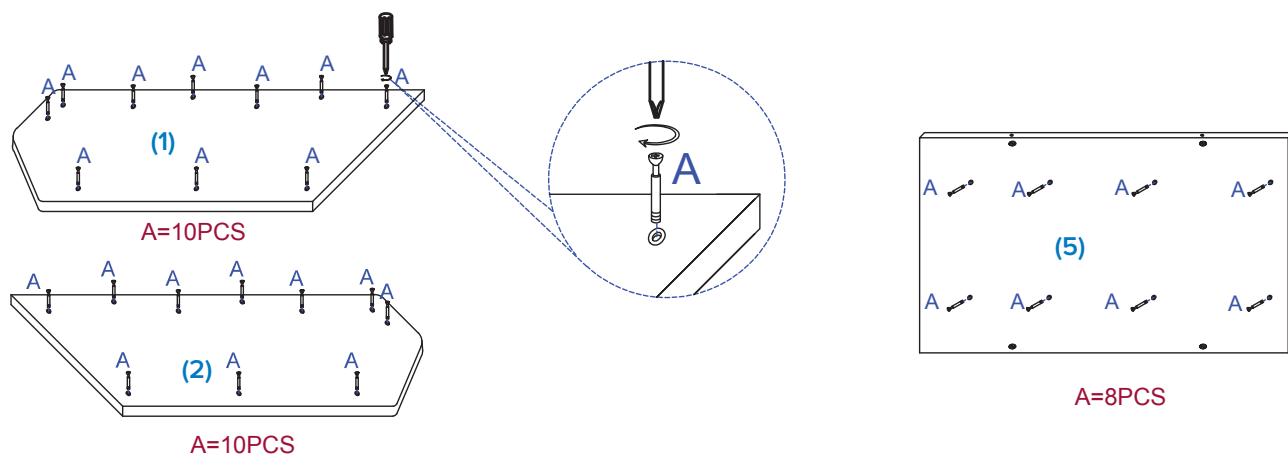


STEP 2.

Insert cam lock nuts (Dx28) into top ledge, top, middle, and bottom shelves (3, 4, 6, and 7). Insert cam lock screws (Ax8) into bottom shelf (7). Arrow on cam lock nut should face outer edge where screw will be inserted.

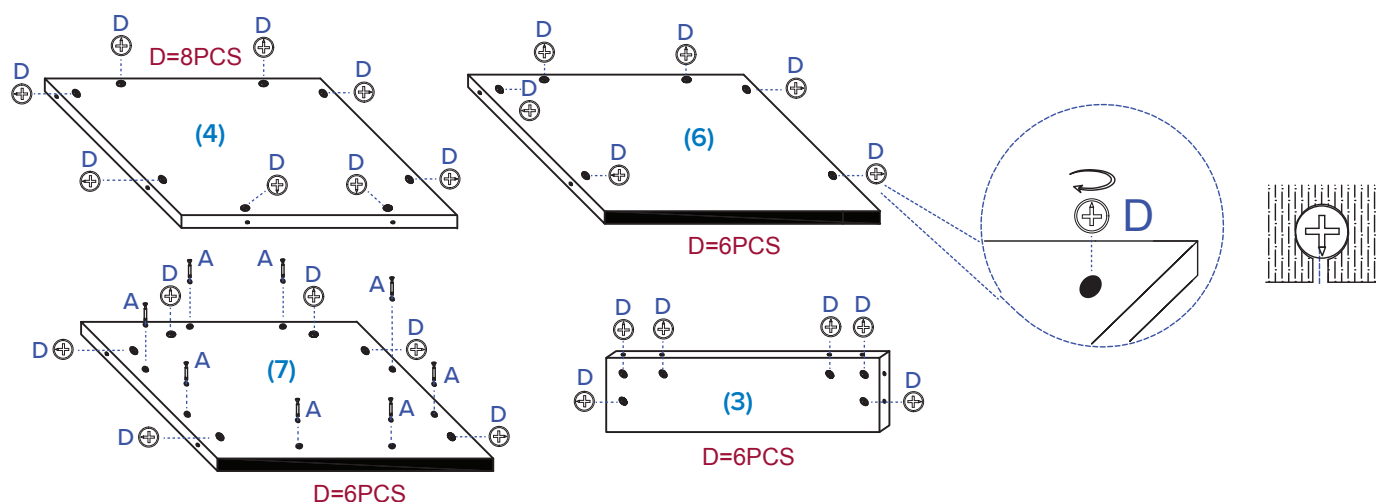

STEP 3.

Lay back board (5) on ground. Add shelves (3, 4, 6 and 7), and line up cam lock (D) and cam lock screw (A). Tighten cam lock nut (D) with screwdriver once boards are in place.

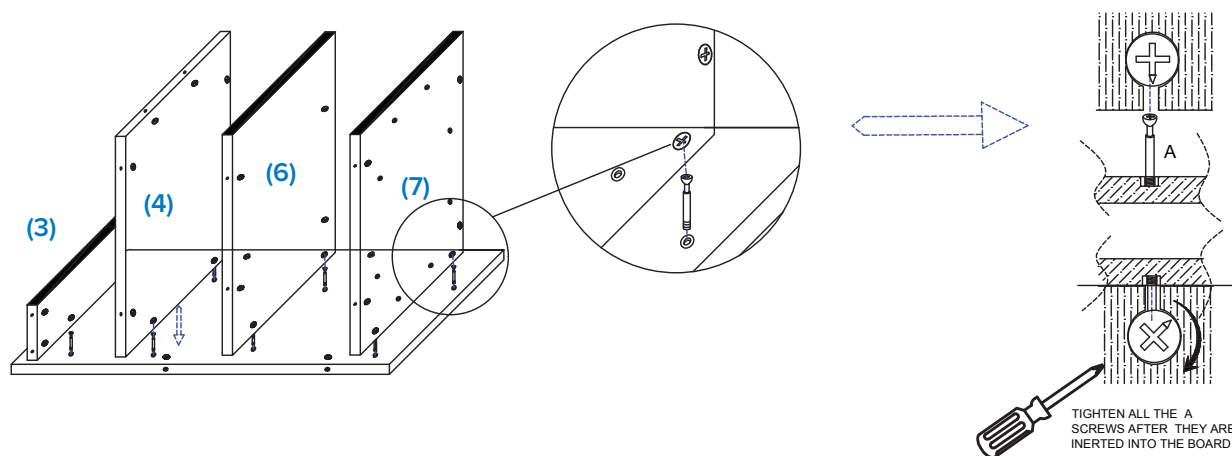


TIGHTEN ALL THE A SCREWS AFTER THEY ARE INSERTED INTO THE BOARD

STEP 4.


Align left and right side boards (1) and (2) onto the corresponding sides of shelves (3, 4, 6 and 7).

- a. Once boards (1) and (2) are placed with cam lock screws (A) in corresponding cam lock nuts (D), tighten nuts with screw driver.

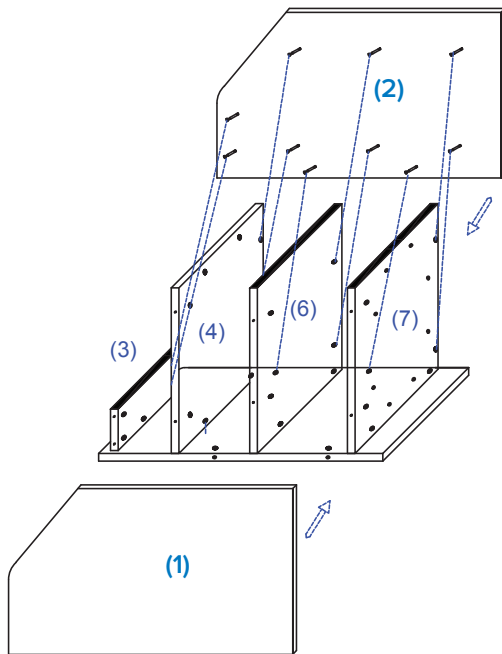


STEP 5.

Screw in cam lock screws (A) to top shelf ledge (9).

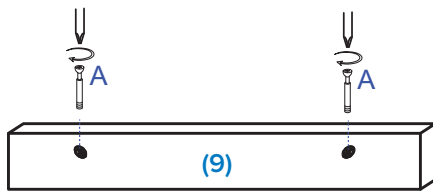


STEP 6.

Place top shelf ledge (9) onto the top shelf (4) of the waitress station, use screwdriver to tighten cam locks.

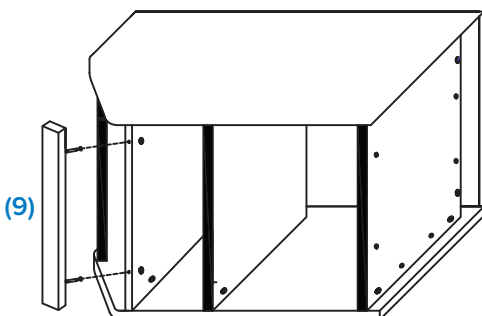


STEP 7.

Attach 2 magnetic door catches (Ex2) to underside of middle shelf with screws (Cx4).

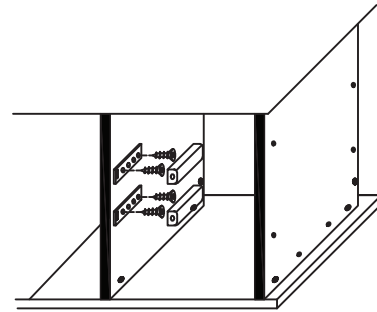


STEP 8.

Add cam lock nuts (Dx16) to base boards (10 and 11). Add cam lock screws (Ax8) to ends of base boards (10 and 11).

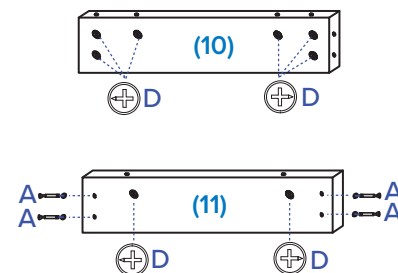


STEP 9.

Form a rectangle with base boards (10 and 11). Align cam lock nuts with cam lock screws and use screwdriver to tighten.

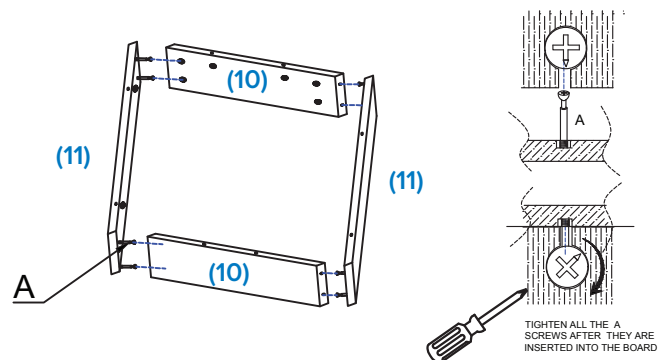


STEP 10.

Use the rectangular piece made from step 9 to attach to bottom shelf (7) with shorter base board (10) parallel to the front of the waitress station.

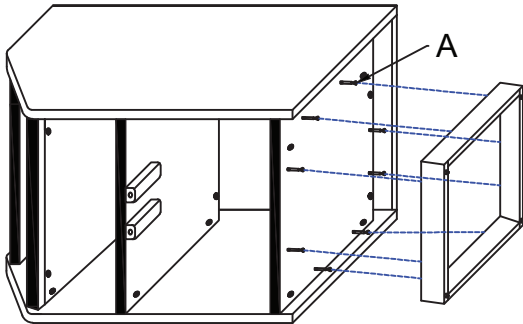

STEP 11.

Finally, place door hinges (Bx2) onto the predrilled holes in cabinet door (8x1). Use screwdriver to screw (Cx4) into the predrilled holes. Repeat for second door.

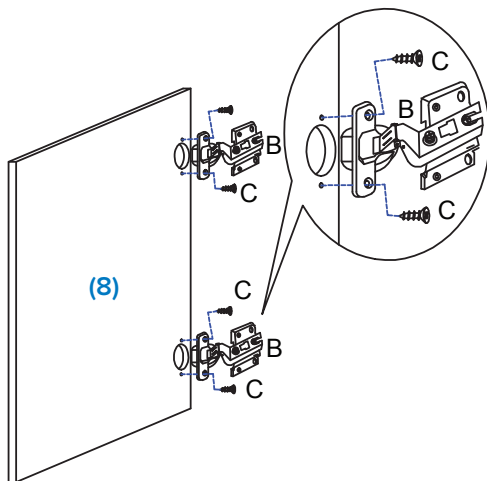

STEP 12.

Turn waitress station right side up and make sure all connections are secure.

