

Built-in DALI-to Bluetooth Converter/Translator Module

HBEM8200D/F
DALI

HYTRONIK®



Product Description

HBEM8200D/F is a DALI/Bluetooth convertor, which converts a standard DALI/DALI2 emergency driver output to Bluetooth output, so that user can view, edit and manage the emergency system through high-end Koolmesh platform. User can then enjoy all the powerful and convenient features in Koolmesh platform, such as scheduling a monthly self test or annually self test in the app, checking the DALI/DALI2 emergency drivers' status, including automatic email notification upon detecting fault, automatic monthly/yearly (functional/duration test) emergency report generation etc. All the settings and parameters can be set in both Koolmesh app and Koolmesh IOT platform.



App Features

- Floorplan feature to simplify project planning
- Grouping luminaires via mesh network
- Scenes
- Push switch configuration
- Schedule to run scenes based on time and date
- Astro timer (sunrise and sunset)
- Device firmware update over-the-air (OTA)
- Power-on status (memory against power loss)
- Offline commissioning
- Different permission levels via authority management
- Network sharing via QR code or keycode
- Remote control via gateway support HBGW01
- Interoperability with Hytronik Bluetooth product portfolio
- Compatible with EnOcean BLE switches
- Continuous development in progress...

Hardware Features

- 100mA DALI broadcast output for up to 50 LED drivers
- Compact design
- 2 Push inputs for flexible manual control
- Short-circuit protection
- Overload protection
- 5-year warranty

* Certain scenes which require external photocell can be achieved by using together with Hytronik Bluetooth sensors, such as HBIR29, HCD038/BT + sensor head etc.

 **EnOcean**
Self-powered IoT



Fully support EnOcean self-powered switch module PTM215B (HBES01/W & HBES01/B)


Bluetooth 5.0 SIG mesh



Smartphone app for both iOS & Android platform



Koolmesh Pro app for iPad



Web app/platform: www.iot.koolmesh.com

Note:

Point to Point Control: 1pc HBEM8200D/F convertor for 1pc 3rd party DALI/DALI2 emergency driver.

Remote Control and Monitoring: with Bluetooth gateway HBGW01, users can remotely control and monitor emergency system via Koolmesh mobile/tablet app & web app platform.

HBEM8200D/F & 3rd Party standard DALI/DALI2 emergency driver does not need to connect to central DALI PSU. HBEM8200D/F provides power supply to the 3rd party standard DALI/DALI2 emergency driver.

Technical Specifications


Bluetooth Transceiver	
Operation frequency	2.4 GHz ~ 2.483 GHz
Transmission power	4 dBm
Range (Typical indoor)	10~30m
Protocol	Bluetooth® 5.0 SIG Mesh

Environment	
Operation temperature	Ta: -20°C ~ +50°C
Case temperature (Max.)	Tc: +75°C
Storage temperature	-20°C ~ 60°C
Relative humidity	20 ~ 90%
IP rating	IP20
Insulation	Class II


Input & Output Characteristics	
Operating voltage	220~240VAC 50/60Hz
Stand-by power	<0.5W
Load rating	100mA, 16VDC (max. 50 devices)

Safety & EMC	
EMC standard (EMC)	EN55015, EN61547 EN62479, EN61000
Safety standard (LVD)	IEC/EN 61058, AS/NZS 61058
Radio Equipment (RED)	EN300 328, EN301489-1/-17, EN62479
Certification	Semko, CB, CE, EMC, RED, RCM


Mechanical Structure & Dimensions

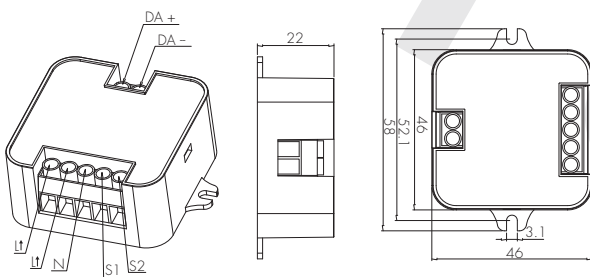

Wire Preparation

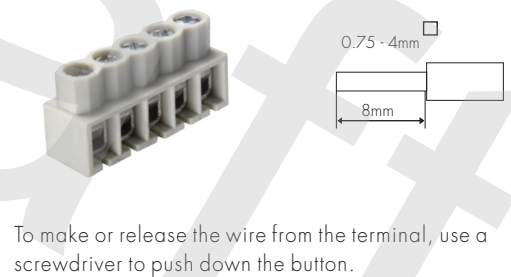

Wiring Diagram

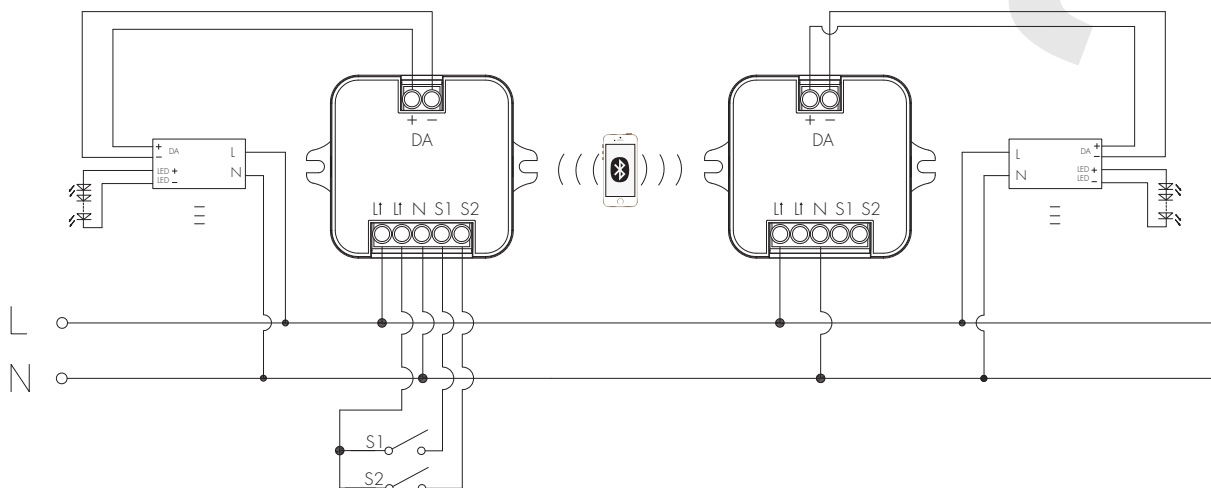

Normal Mode

It is the mode in which mains supply is available, with the battery charged or charging. In this mode, HBEM8200D/F is a standard Bluetooth dimmer with DALI broadcasting function, also with ability to create scenes and controllable by motion sensor, Push switch, schedules and app.

Emergency Mode

It is the mode in which mains supply has failed and whilst the control gear is powered by the battery until deep discharge point. In this mode, HBEM8200D/F is unable to be controlled by motion sensor, Push switch, schedules and app. However, some emergency parameters can still be conjured via the app, such as time scheduled for self-test, duration for extended emergency mode etc.

Rest Mode

It's the mode in which the luminaires are intentionally off whilst the control gear is powered by the battery. To enter this mode, the prerequisite is that there is no mains supply. In this mode, the luminaires will be turned off automatically and HBEM8200D/F is powered by the battery. If the luminaires are forced to turn on in this mode, HBEM8200D/F will then be adjusted to emergency mode. When mains supply is recovered, HBEM8200D/F will return to normal mode.

Inhibit Mode

It is the mode in which HBEM8200D/F is powered from mains but prevented from going into emergency mode in the event mains failure. Please enter this mode only in special applications whereby emergency functions is not needed, such as when electricians need to cut off power supply when doing examinations and maintenance work of HBEM8200D/F.

Extended Emergency Mode

It is the mode in which the control gear continues to operate the luminaires in the same way as in emergency mode for the programmed prolong time after the restorations of the mains supply. When this mode is enabled, HBEM8200D/F will remain in emergency mode even when mains supply is recovered. In this mode, the user must set the time extended for emergency mode; when the time extended elapses, HBEM8200D/F will return to normal mode.

Self test (Monthly)

HBEM8200D/F carries out routine test on emergency lighting based on pre-programmed time via the app & web app platform or after receiving manual commands from the app & web app platform. During the self test process, tests for load connections (such as open circuit, short-circuit) and battery connections (such as open circuit, short-circuit, polarity reversal etc.) will be carried out.

All the DALI emergency drivers Self Test feedbacks, results and related Events (Such as the open circuit and short circuit of the load connection, open circuit and short circuit for battery connection) are generated by the driver itself, the HBEM8200D/F convertor will only retrieve the data from the emergency driver and translate the DALI feedback into Bluetooth Mesh data correctly and accurately and display to the end user interface (App and Web app Platform). It will not contain any Emergency Self Test circuit in the products itself.

Self test (Annually)

The test is carried out mainly to check the battery level. The user must make sure that the battery for DALI emergency driver is fully charged before HBEM8200D/F carries out annual test. Also, the battery lifetime statistics will be analysed and displayed on a chart basis.

Push switch function

Users can connect Push switch to HBEM8200D/F to achieve multiple functions such as manually trigger monthly self test, annually self test, invalid and back to normal mode. Those options can be selected in Koolmesh app Push switch settings.



Dimming Interface Operation Notes

Switch-Dim

The provided Switch-Dim interface allows for a simple dimming method using commercially available non-latching (momentary) wall switches. Detailed Push switch configurations can be set on Koolmesh app.

Switch Function	Action	Descriptions
Push switch	Short press (<1 second) * Short press has to be longer than 0.1s, or it will be invalid.	- Turn on/off - Turn on only - Turn off only - Recall a scene - Quit manual mode - Do nothing
	Double push	- Turn on only - Turn off only - Recall a scene - Quit manual mode - Do nothing
	Long press (≥ 1 second)	- Dimming - Colour tuning - Do nothing
Simulate sensor	/	- Upgrade a normal on/off motion sensor to a Bluetooth controlled motion sensor
Emergency Self-Test Function	Short press (<1 second) * Short press has to be longer than 0.1s, or it will be invalid.	- Start Self test (Monthly) - Stop Self test - Start Self test (Annually) - Invalid
	Long press (≥ 1 second)	- Start Self test (Monthly) - Stop Self test - Start Self test (Annually) - Invalid

Additional Information / Documents

1. To learn more about detailed product features/functions, please refer to www.hytronik.com/download->knowledge->Introduction of App Scenes and Product Functions
2. Regarding precautions for Bluetooth product installation and operation, please kindly refer to www.hytronik.com/download->knowledge->Bluetooth Products - Precautions for Product Installation and Operation
3. Data sheet is subject to change without notice. Please always refer to the most recent release on www.hytronik.com/products/bluetooth technology->DALI to Bluetooth Converter/Translator Module
4. Regarding Hytronik standard guarantee policy, please refer to www.hytronik.com/download->knowledge->Hytronik Standard Guarantee Policy

