

Quick-start guide

RA2 Select Main Repeater


Please read before installing

Contents supplied:

RA2 Select Main Repeater*
(RR-SEL-REP2)
5 V $\equiv$ 300 mA



Power Supply
(T-5DC-USB)
Input: 100–240 V $\sim$ 50/60 Hz 100 mA
Output: 5 V $\equiv$ 550 mA



Ethernet Cable



* Connected to a Class 2, LPS, or SELV, limited energy (<15 W) power source only.

Extend Your Warranty

Love Lutron products? Have ideas for making them better? Tell us what you think and we'll extend your warranty by 1 year.

www.lutron.com/RegisterRA2Select

Customer Assistance

U.S.A. and Canada: 1.844.LUTRON1

Fax: +1.610.282.6311

Mexico: 1.888.235.2910


Other countries: +1.610.282.3800

www.lutron.com/support




1 Install the RA2 Select Main Repeater

A. Connect the Main Repeater to your Wi-Fi router using the Ethernet cable.

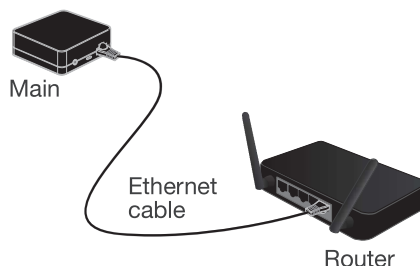

B. Connect the power cord to the Main Repeater and plug it into an outlet.

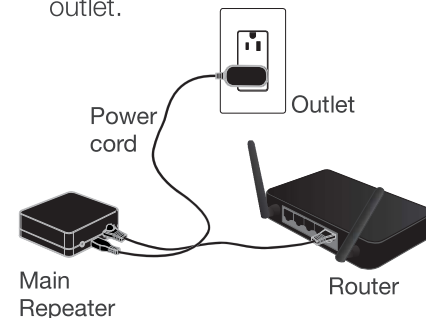

2 Download the Lutron app and walk through setup



Search for “Lutron App”



Lutron

Note: The RA2 Select Main Repeater cannot be used with the RadioRA 2 PC-based programming software.

Accessory
Setup Code

Warranty

For warranty information, please visit www.lutron.com/warranty

Lutron, Lutron, and  are trademarks of Lutron Electronics Co., Inc. registered in the U.S. and other countries. RadioRA 2 is a trademark of Lutron Electronics Co., Inc. Apple is a trademark of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc., registered in the U.S. and other countries. Google Play and the Google Play logo are trademarks of Google Inc. ©2017 Lutron Electronics Co., Inc.