


OWNER'S MANUAL

CASE PREP DUO




Item No. 050180

Instructional videos for Hornady® reloading products are available at hornady.com.



Hornady®
Accurate. Deadly. Dependable.

ITEMS INCLUDED

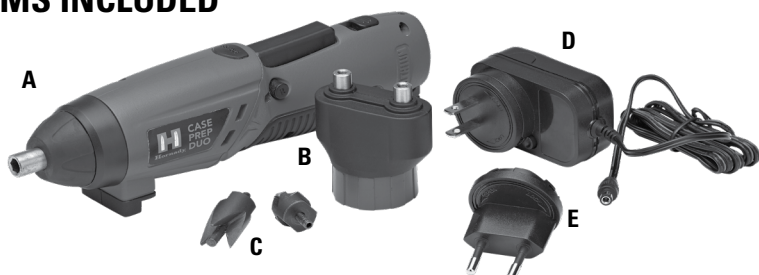

A) Case Prep Duo Tool

B) 2-Spindle Adaptor

C) 8-32 ID and OD Chamfer Tools

D) Power Supply Charger

E) EURO Power Supply Adaptor

USER INSTRUCTIONS & SAFETY TIPS

The Case Prep Duo can be used with most 8-32 threaded reloading tools to chamfer, clean, and deburr cases. It can also be used as an electric screwdriver. Please read and understand this user manual prior to operating this tool. Use this tool and its charging unit and accessories only for the specified range of applications. All other applications are expressly excluded.

SAFETY INSTRUCTIONS

- For your own safety read this manual carefully before using the Case Prep Duo.
- Use caution around moving parts and sharp tools.
- Before screwing into a wall, make sure there are no utilities behind the wall (electrical lines, gas lines, water supply lines, etc.).
- Before setting down the Case Prep Duo, make sure all moving parts have come to a stop.
- Avoid frequent stalling when screwing as this could damage the batteries.
- Only charge the Case Prep Duo battery with the included charging device.
- Do not use in wet locations.
- When not in use, store in a cool and dry location.
- To protect the batteries from damage, never expose them to temperatures above 120°F (50°C).
- Do not wear loose clothing when operating.
- Tie back long hair when operating.
- Chamfer tools are very sharp. Use caution when operating or removing tools.

Warning: Do not short-out the contacts of the battery or charger. Do not throw the battery in a fire.




CHARGING

Before using this tool you must charge the battery.

Charging the battery:

- Insert power supply plug into the power jack on the driver handle (fig. 1).
- Plug AC adaptor into a standard wall outlet.
- While charging, the LED light on the handle will illuminate red. When fully charged, the light will turn off. (A full charging cycle requires approximately 5 hours.)
- The power supply should be unplugged from the wall and Case Prep Duo when charging is complete.
- For optimum battery life, always recharge the battery before it is fully discharged.
- The Lithium battery can remain fully charged for up to 2 months when not in use.

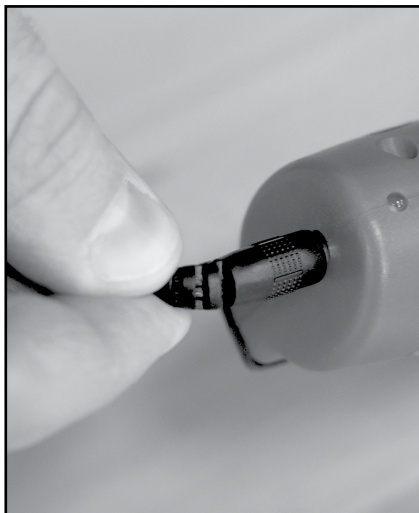

(fig. 1)

ATTENTION!

To avoid the risk of overheating, do not exceed the maximum charging time of 8 hours.

OPERATION INSTRUCTIONS – IMPORTANT!

- The battery needs to be charged before its first use.
- Only after several charge and discharge cycles will the battery reach and maintain full capacity.
- The battery may become warm while charging. This is normal and does not indicate a problem.
- Before using the tool, unplug the charger and disconnect the tool from the charger.

USING THE CASE PREP DUO AS A SCREWDRIVER

The driver chuck is compatible with most 1/4" hex shank bits. Because the tools are retained in the chuck by magnetic force, the chuck is only compatible with iron and iron based magnetic alloys (steel).

To insert a tool in the chuck, simply insert the tool until it is firmly seated. Check the tool to make sure it is engaged with the magnet. Remove tools by pulling them straight out of the chuck.

The rotation of the tool is operated by a single forward/reverse switch (2). Pressing the "F" button will cause the 1/4" hex shaft to rotate clockwise. Pressing the "R" button will cause the 1/4" hex shaft to rotate counter-clockwise.

When possible, securely clamp the item you are working on to a firm stationary surface to reduce the chance of injury.

USING THE CASE PREP DUO WITH THE 2-SPINDLE ADAPTOR:

The Case Prep Duo is designed to accept accessory tool adaptors to expand the use of the tool. The ID and OD chamfer tools can be used to chamfer and deburr cases. Other accessories including brushes, primer pocket cleaners, etc., can be purchased separately.

INSTALLING A SPINDLE ADAPTOR

- Remove protective rubber cover with a slight wiggle (fig. 2).
- Select desired driving Adaptor and angle position, and push onto the locking coupler (fig. 3).
- To remove driving Adaptor, rotate lock collar and pull Adaptor gently until released.

When using the 2-spindle adaptor, the gears in the adaptor reverse rotation.



(fig. 2)



(fig. 3)

IMPORTANT – When using the 2-Spindle Adaptor and the chamfer tools, the driver must be in the "R" or reverse direction.

GRIP REPOSITIONING

The Case Prep Duo is designed to be used as a handheld or benchtop tool. The integrated rubber feet provide a non-slip base for benchtop use. The step in the front foot allows the tool to be placed over the edge of a work bench.



Pistol Grip Position



Benchtop Straight Position



Benchtop Edge Position

CONVERTING THE GRIP ANGLE

While holding the grip of the Case Prep Duo, press the lock button on the main body and rotate the grip and body section 180 degrees. The lock button should snap into position after rotating, securing the grip in the new orientation.



Specifications

- Model #: 050180
- 3.6V Lithium Battery
- Driver Output: 1/4" Hex
- 2-Spindle Adaptor Output: 8-32 thread

Charging Device:

- Input: 100-240V 50/60Hz
- Output: 5V 0.4A

WARRANTY

All Hornady® reloading tools and accessories are warranted against material defects and workmanship.

Hornady® electronic components are covered by a one-year warranty from the date of purchase.

This warranty is void if the product (1) has been damaged by accident or unreasonable use, neglect, improper service or other causes not arising out of defects in material or workmanship; or (2) has been altered or repairs have been made or attempted by other than authorized factory personnel; (3) is used commercially; or (4) has been altered or defaced in any way.


This warranty supersedes all other warranties for Hornady® products either written or oral. No other warranty is expressed or implied.

PRODUCT REGISTRATION AND SERVICE

You must register your product to obtain Warranty Service. Complete the registration form at hornady.com/warranties.

TO RECEIVE WARRANTY SERVICE

To report a warranty claim, call Hornady® at 800-338-3220 to request a return authorization number. Returns will not be accepted without prior return authorization by Hornady®.



Scan to register your product to receive the full benefit of its warranty.

POST-WARRANTY SERVICE INFORMATION

For issues concerning service after the Limited Warranty expires, contact Hornady® at 800-338-3220.

PRODUCT SERIAL NUMBER AND REFERENCE INFORMATION

You must register your product in order to obtain warranty service. In the event you should need service for your product, please note the following information:

Serial Number _____

Date Purchased _____

Retailer _____

P.O. Box 1848, Grand Island, Nebraska 68802-1848
308-382-1390 • 800-338-3220 • Fax: 308-382-5761

Hornady.com/contact

