


Product Manual

Dual Display USB-C Hub

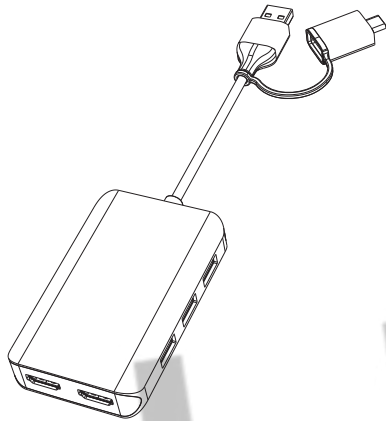


ENGLISH

Introduction

The USB 3.0 hub uses Silicon Motion's SM768 USB display / docking station SoC, which can work with 2 up to 4K UHD+ 1080P monitors through USB port. It's perfect for laptops to extend 2 external monitors in MST mode on macOS, Intel or Apple Silicon M1/M2 MacBook devices.

NOTE: Before using the HDMI function,the driver needs to be installed manually. You can download the driver here: www.siliconmotion.com/downloads/

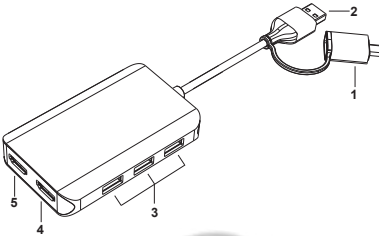

- 1: USB A 3.0
2: USB A to USB C Adapter
3: USB A 2.0 port
4: **HDMI** 1
5: **HDMI** 2

Interface	Specification
USB 3.0	To connect USB A or USB C computer
USB 2.0	480 Mbps 5V/0.5A
HDMI 1	4K@30hz/8bit (MAX)
HDMI 2	1080p@60hz/48bit (MAX)

How to install/uninstall the driver


Go to the page: www.siliconmotion.com/downloads/ .
According to your laptop system, download the correct driver.

A: MacOS

- 1: Double click the InstantView.dmg
2: Drag "macOS InstantView" to Application folder




- 3: Find the "macOS InstantView" in Launchpad and open it.
Using the "macOS InstantView" app for the first time and it will ask for the permission of Screen Recording.

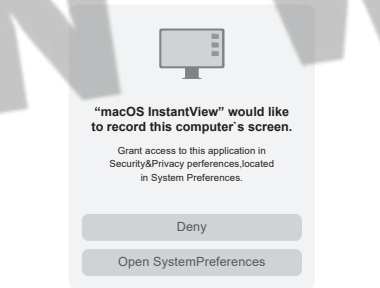

- 4: When you Click the Open System Preferences and find there is no tip, please follow those steps:


-Operate Apple System Preferences > Security & Privacy > Privacy > Screen Recording.
-Then Click the lock to make changes
-Input the Password or Use the fingerprint to enter
-Tick the "macOSInstantView.app"

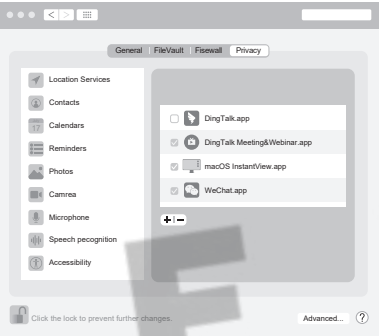


- 5: After installing the app, the menu bar will show an icon  .
Right Click it , there are some quick-setting menus, including the "Removing application"option. You can uninstall the driver via the option above when you don't need it anymore.

B: Windows

- 1: Extract the downloaded file , double click the software package. then follow the setup and complete the installation.

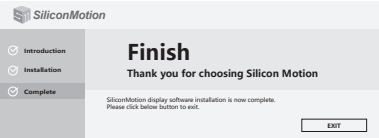


- 2: After installing the driver, you can extend 2 monitors.
3: You can uninstall it by clicking "Settings > Apps > Apps & features > Silicon Motion USB Display Driver > Uninstall.

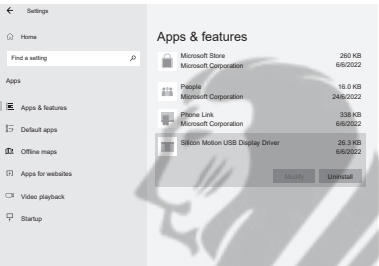


How to set up resolution and display mode;

A : MacOS (Monterey): System Preferences > Displays > Display Settings.

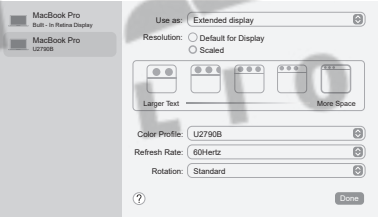

Then you ncan change the display mode in "Use as" menu and will set up these setting like :
Resolution/ColorProfile / Refresh Rate and Rotation.

B: Windows(Windows11): Start>System>Display

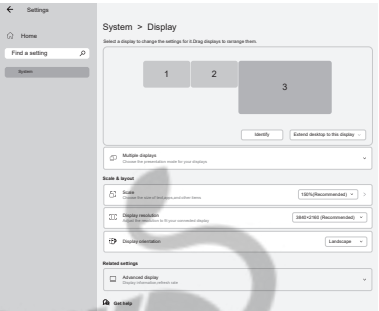

Set the Display mode, Resolution, Color Profile, Orientation and Refresh Rate in Advanced display

FAQs

- 1)Why is USB 3.0 Hub not working
A: Please make sure the USB Hub has installed the correct driver according to the instruction. Because this USB 3.0 Hub is not using the USB C DP alt mode function, so it can't plug&paly.
2)Why can't I use USB 3.0 Hub suddenly after upgrading my laptop?
A: When the USB 3.0 Hub cannot be used after the system upgrading, please go to www.siliconmotion.com/downloads/ to download and install the latest driver.

- 3)Can it work on other old USB A 3.0 laptops?
Yes, as long as you can download the driver for the corresponding system, it will work.

If you have any questions, please feel free to contact us
supportus@lionweitech.com

FC CE RoHS **HDMI**
HIGH-DEFINITION MULTIMEDIA INTERFACE
Made in China