


SB-X150 II

User Manual




Unboxing



SB-X150 II



Type-C charging cable




User Manual



3.5mm line-in AUX cable

Product Overview

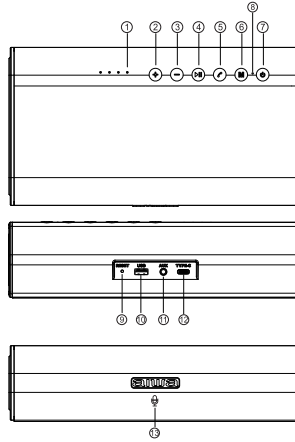

1. Battery life indicator light
2. Volume+/Next track
3. Volume-/Previous track
4. Play/Pause/TWS connection/BT Disconnection
5. Hands-Free calling
6. Mode
7. Power button
8. Status indicator light
9. Reset button
10. USB driver slot
11. AUX in slot
12. Type-C charging port
13. Built-in microphone

Power ON/OFF

Hold down power button  for 3 seconds.

Switching playback modes

Short press mode button  to switch between BT-AUX-USB mode.

TWS Connection/ BT Disconnection

Double press  to initiate TWS connection.

Long press  to disconnect BT connection.

Volume +/-, Next/Previous Track

Long press  &  button to decrease & increase audio volume respectively.


Short press  &  to trigger previous & next track respectively.

USB driver playback

Insert the USB driver(Audio prompt accompanied by Orange indicator light indicates successful connection),Playback will start immediately


AUX Line-in Playback

Power up the speaker, insert 3.5mm audio cable. (White indicator light indicates successful connection).

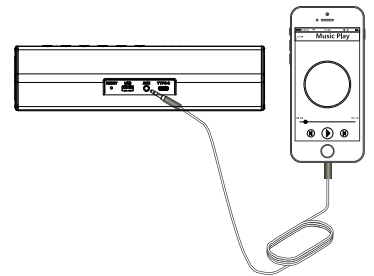

BT Connection


1. Power on SB-X150 II.
2. Find "SB-X150 II" in your mobile BT devices list and connect.

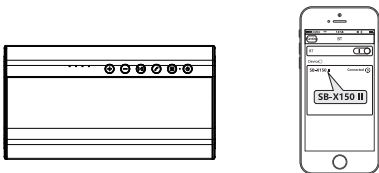

Battery & Charging

Connect Micro-USB charging cable to any power source and to SB-X150 II as shown.

- *Supports 5V,9V,15V,20V quick charging. Maximum quick charging output: 40 W*
- *Charging time:3-5hours*
- *Playback time:6-8hours*

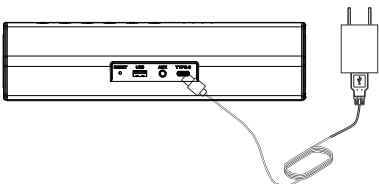


TWS (True Wireless Stereo) Playback

Double press TWS button on both devices simultaneously to establish TWS connection.

(Product is compatible with our SB-X Range 100/120/150 II. Please refer to www.int-aiwa.com for more updated information regarding our product line up.)

Perform BT connection (refer to BT Connection) with host unit only (Flashing Indicator Lights)

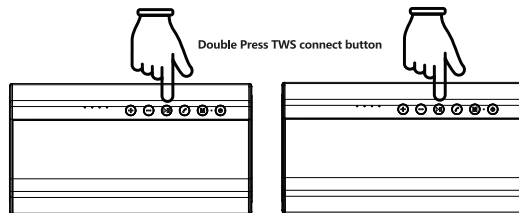

TWS (True Wireless Stereo) Disconnection

Long press TWS button to stop TWS connection.

Connect to 2 devices

The SB-X150 II can connect up to 2 devices.

Perform BT connection twice sequentially (refer to BT Connection) with the speaker unit.

SB-X150 II will prioritize the first connected device' s playback. Pausing of the first device playback is necessary for secondary device playback.

LED Indicator light

BT mode:	Flash quickly	BT ready to pair
	Flash slowly	BT connected successfully
White AUX mode:	Stay on	Playing music
	Flash	Slowly Pause
Orange USB mode:	Stay on	AUX IN Playing
	Flash slowly	Pause
Orange USB mode:	Stay on	USB Play
	Flash slowly	Pause

Low battery :

Audio prompt " Beep" will be played. Speaker will shutdown after 3 prompts.

Specification

Item:Wireless Portable Speaker	Model name:SB-X150 II
Rated Voltage:DC5V	BT version:5.0
Rated input current:1A	Support Audio format:aptX/SBC/AAC/MP3
BT working rang:20M	Battery:18650/2000mah*4
Mid&high driver output:10W*2	Bass driver output:20W
Play time:6-8Hours	Charging time:3~5Hours
Dimension:230*125*60mm	Weight:1122g