


SuperEQ

by OneOdio

BE YOUNG, BE FREE

SuperEQ

by OneOdio

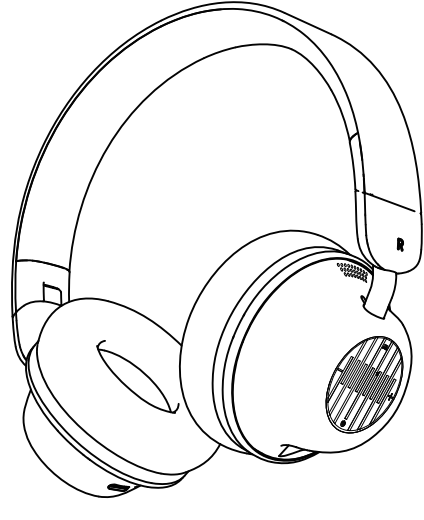

S2

Active Noise-cancelling Headphones

User Manual / Bedienungsanleitung / 取扱説明書

Active Noise-cancelling Headphones

1. Product Name: SuperEQ S2

2. Bluetooth Version: V5.0

3. Battery Capacity: 500mAh

4. Input: USB 5.0V/360mA

5. Charging Time: About 2 hours

6. Play Time 1: 18 hours (Bluetooth noise-cancelling mode)

7. Play Time 2: 25 Stunden (ANC+BT)

8. Play Time 3: 45 hours (wired noise-cancelling mode)

9. Noise Reduction Depth: 20~25dB

10. Bluetooth Range: >= 10m/33feet

11. Diameter: φ40mm driver

12. Frequency Response: 20Hz~20kHz

13. Net Weight: 210g

アクティブノイズキャンセリングヘッドホン

1. 型名: SuperEQ S2

2. Bluetoothバージョン: V5.0

3. バッテリー容量: 500mAh

4. 入力: USB 5.0V/360mA

5. 充電時間: 約2時間

6. 再生時間1: 18時間 (ANC+BT)

7. 再生時間2: 25 時間 (BT only)

8. 再生時間3: 45 時間 (ANC only)

9. 騒音低減効果: 20~25dB

10. 最大通信距離: 約10m/33f

11. ドライバー口径: 40mm

12. 周波数帯域: 20Hz~20kHz

13. 本体重量: 210g

Kopfhörer mit aktiver Geräuschunterdrückung

1. Produktname: SuperEQ S2

2. Bluetooth-Version: V5.0

3. Batteriekapazität: 500mAh

4. Eingang: USB 5.0V/360mA

5. Ladezeit: ca. 2 Stunden

6. Nutzungszeit 1: 18 Stunden (ANC + BT)

7. Nutzungszeit 2: 25 Stunden (nur BT)

8. Nutzungszeit 3: 45 Stunden (nur ANC)

9. Rauschunterdrückungstiefe: 20~25dB


10. Bluetooth-Reichweite: >= 10m/33f

11. Durchmesser: 40mm Treiber

12. Frequenzgang: 20Hz ~ 20kHz

13. Nettogewicht: 210 g

Product overview / Diagramm / 製品概要

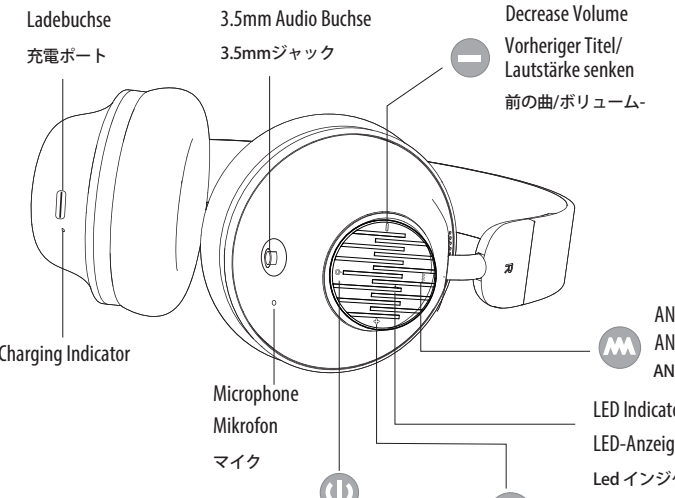

Indicator Light

Pairing	Red and blue light flash alternately
Paired	Blue light flashes
Playing	Slow flashes blue light
Charging	Red light on
Full Charge	Red light turns off
Battery Low	Red light flashes with voice prompt
ANC Working	Green Light turns on

Tips: When the distance between the Headphone and phone is beyond effective range, Headphone disconnects with the phone. The headphone will power off automatically once no activity for 10 minutes.

ヘッドホンインジケータの状態

ペアリング状態	青と赤で交互に点滅
接続成功	青で点滅
音楽再生中	青でゆっくり点滅
充電中	充電指示灯が赤になる
充電完了	赤から消えます
バッテリーレベルが低下	赤に変わり、音声警告が鳴る
ANCオン	緑に変わる

ご注意：ヘッドホンと電話の間の距離が有効範囲を超えると、ヘッドホンは電話との接続を切断します。10分間アクティブでなくなると、ヘッドフォンの電源が自動的にオフになります。


Anzeige

Koppeln	Licht blinkt zwischen rot und blau
Gepaart	Blaues Licht blinkt
Spielmodus	Blaues Licht blinkt langsam
Aufladen	Rotes Licht auf
Volle Ladung	Rotes Licht erlischt
Batterie schwach	Rotes Licht blinkt mit Sprachansagen
ANC	Grünes Licht leuchtet durchgehend

Package Contents / Packungsinhalt / パッケージ内容



Noise cancelling on / Noise cancelling off
ノイズキャンセリングオン/ノイズキャンセリングオフ

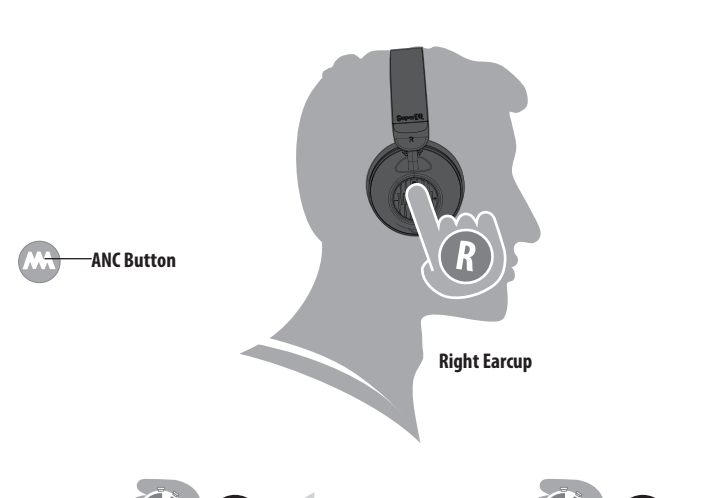

ANC Button

Right Earcup

On/Off & Pairing/ Ein/Aus/Koppeln / オン/オフ/ペアリング

On/Off/Bluetooth Pairing

Power ON

Hold on 2s

Power OFF

Hold on 3s

Press & Hold

Hold on 5s

To pair with another device, power off the headphones. Then power back on by holding the power button for 5 seconds. The headphones will enter pairing mode.

How to Pair/ Koppeln / ペアリング方法


Step1:

Hold on (5s) Pairing Mode

Step2:

Pairing Mode

Music Controls / Musiksteuerung / 音楽コントロール

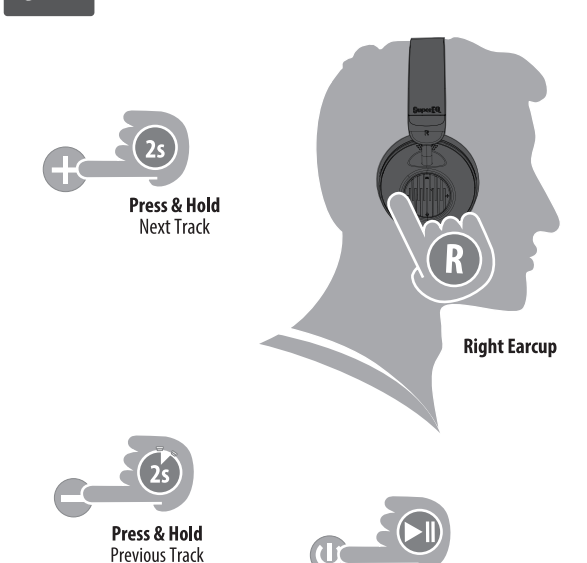

Press & Hold

Next Track

x1 Click

Increase Volume


Press & Hold

Previous Track

x1 Click

Decrease Volume

Phone Controls / Telefonsteuerung / 電話コントロール

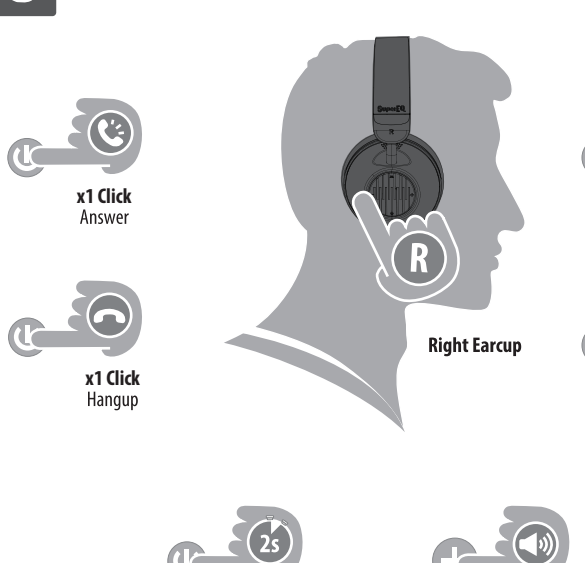

x1 Click

Answer

Press & Hold

Answering, Switch to Handsfree Audio

x1 Click

Hangup

x1 Click

Decrease Volume

Press & Hold

Incoming Call, Do Not Answer

x1 Click

Increase Volume

LED DISPLAY/LED ANZEIGE/ライト表示



Turn on: blue light
Einschalten: Blaues Licht
オン: ブルーライト


Turn on: blue light
Aussschalten: Rotes Licht
オフ: 赤ランプ

Pairing mode: light flashes red and blue alternately
Paarungs-Modus: Licht blinkt abwechselnd rot und blau
ペアリングモード: 赤と青が交互に点滅

ANC mode: The green light is always on
ANC-Modus: Das grüne Licht ist immer an
ANCモード: 緑のランプが常時点灯

Paired mode: light flashes blue once every 4 seconds
Paarungs-Modus: Licht blinkt alle 4 Sekunden einmal blau
ペアリングモード: 4秒に1回青の光、青いランプが点滅します。

Charge The Headphones / Aufladen / ヘッドホンを充電する方法

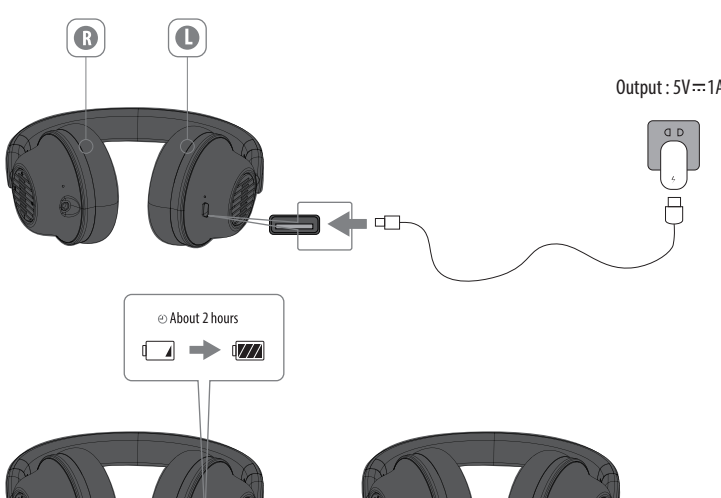

Output: 5V=1A

Approx 2 hours

Warning

The in-flight adaptor lets you enjoy balanced sound from the in-flight entertainment system while travelling in a plane.

The in-flight adaptor is NOT MEANT to charge your device. Plugging the in-flight adaptor into a AC Power Socket to charge the headphones will cause severe damage to the device.

Q&A

Why can't my headphones charge?

A: 1. Please eliminate the problem of insufficient power of the headphone. If the charging current is unstable, it will have an impact on the charging module, which may cause it to enter the protection mode after charging (it cannot be turned on). 2. Please use the 3.5mm audio cable in the headphone accessory to plug into the headphone 3.5mm jack to complete the factory reset. Then you can use the headphone again. 3.If your problem cannot be solved, we hope that you can get in touch with our official customer service email.

Why can't my headphones be used after charging/can't be turned on after using them for a period of time?

A: 1. Please eliminate the problem of insufficient power of the headphone. If the charging current is unstable, it will have an impact on the charging module, which may cause it to enter the protection mode after charging (it cannot be turned on). 2. Please use the 3.5mm audio cable in the headphone accessory to plug into the headphone 3.5mm jack to complete the factory reset. Then you can use the headphone again. 3.If your problem cannot be solved, we hope that you can get in touch with our official customer service email.

Why can't my headphone enter pairing mode?

A: After turning on the headphone, you need to press and hold the shutdown button for 5-6 seconds. When you see the signal lights flashing alternately and quickly, it means that the headphone has entered pairing mode. If you press the shutdown button for a too short time, you cannot enter the pairing mode.

Why is the signal of the headphones intermittent?

A: 1. The 10-meter effective distance of a Bluetooth headphone is a Bluetooth distance in an unobstructed environment. For example, when the headphone signal is used indoors, it will be weakened by passing through a wall. 2.If in areas with high traffic such as airports, train stations, subway, bus stations, shopping malls, and areas with dense signal sources such as signal lights and monitors. Bluetooth headphones are prone to signal instability.

Why can't my headphone connect with Bluetooth device?

A: 1. Clear the history link records of the mobile phone or Bluetooth device. 2. After resetting the headphone to factory settings, try to link again.

When using active noise reduction headphones, the exterior feels very noisy/noise reduction effect is not obvious?

A: Active noise cancelling headphones mainly eliminate low-frequency noise rather than high-frequency noise. Because low-frequency noise has the characteristics of slow transmission speed, the chip of the active noise reduction headset has sufficient response time to offset the opposite band of low-frequency noise. The high-frequency noise has the characteristics of fast transmission and attenuation. When the noise is generated, due to its faster transmission speed, the chip of the active noise cancelling headset does not have enough response time to capture and process it. In real life, if you are in a train or an airplane, you will feel that the noise is eliminated more obviously, because the noise in this part is mainly low-frequency noise.

Limited Warranty / Eingeschränkte Garantie

保証書 / Garantie limitée

Our friendly customer service team are ready and waiting to help. Here is how we can connect:
Unser freundliches Kundenservice-Team ist bereit, Ihnen zu bedienen. So können Sie uns kontaktieren:
私たちのカスタマーサービスチームはいつでもお手伝いします。連絡先は次のとおり:
Notre gentil service client est toujours à votre écoute. Vous pouvez nous contacter par une des manières suivantes:

In order to ensure that your problem can be solved in the first time, we sincerely hope that you can get in touch with our official customer service email (info@supereq.net). SuperEQ customer service team looks forward to communicating with you!

✉ info@supereq.net (Global) support@supereq.in (India)

📞 GLOBAL: +852 6940 3848 Mon-Fri 9:00 am-6:30 pm (UTC +8 HKT)
グローバル: +852 6940 3848 月-金 午前9時00分-午後6時30分 (UTC +8 HKT)
GLOBAL: +852 6940 3848 (in India) au vendredi de 9:00 am à 6:30 pm (UTC +8 HKT)
INDIA: +91-8929-369-620 9:30 to 17:30 active time (IST, Monday to Friday)

🌐 www.supereq.net

CE

RoHS

REACH

FC

UK CA

R 210-10890