

ROSWELL



CYBOX Bluetooth Interface

CYBOX# C920-20130

Information: info@roswellmarine.com

Warranty: warranty@roswellmarine.com

If you have any questions please call : 1-321-638-1331
www.roswellmarine.com

REV. 210922



ROSWELL.

Welcome to the Family.

We at Roswell started a revolution in the wakeboard industry back in 1998, and have since expanded into marine audio and other branches of the marine industry. Even now, over 20 years later, we continue to push the boundaries.

We are fully committed to going past industry expectations every day to make your boating experience more enjoyable. With the input of our dealers, team riders, and boaters around the world, our goal remains to redefine the marine industry day in and day out. We will not be confined to our desks; we are out on the water testing our full line of products to ensure your days on the water are as hassle-free and enjoyable as possible.

If you have any questions about your product or questions regarding installation, please contact your authorized Roswell dealer. If you have further questions, please don't hesitate to contact us directly at (321)-638-1331 or by emailing info@roswellmarine.com.

Table of Contents


Features 03

Operation Instructions 04

ATTENTION

- Multiple devices can be paired to the CYBOX but only one device can connect at one time.
- The CYBOX will remember the last device which was connected to it and will reconnect with it automatically. If that device is not active, then other paired devices can connect manually, or new devices can be paired.
- When a connected device is out of range for more than one minute, the CYBOX will automatically disconnect it and returns to pairing mode (the LED starts blinking).



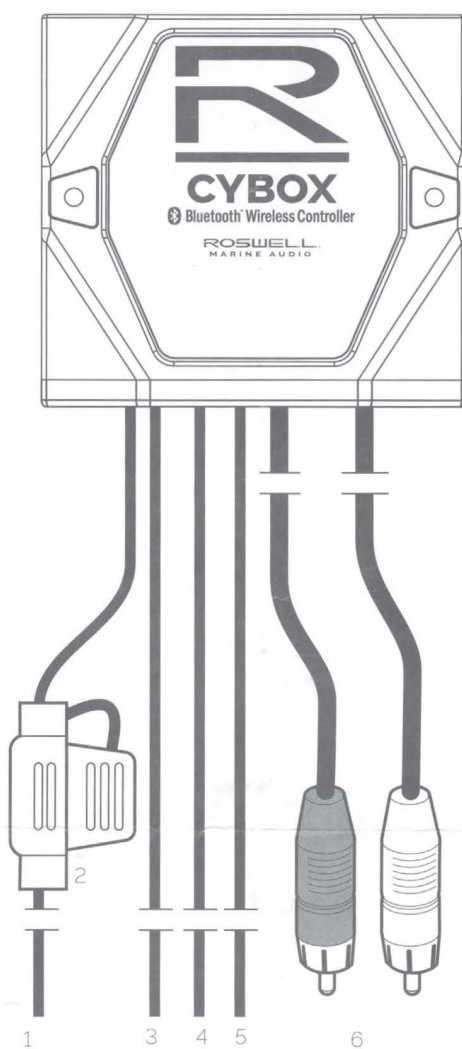

Connections

1. Red: +12V
2. Fuse 2A
3. Blue: Remote output +12V/20mA
4. Orange: +12V switched (ACC)
5. Black: GND
6. RCA Outputs: Red is Right, and White is Left

Specifications

- Power: 12V DC
- Current consumption: 40mA max
- Bluetooth 4.1 / Transmission power <10mW EIRP
- Audio frequency range: 20Hz-20kHz
- Audio output level: 4 V RMS

Pairing your Device (Required for Operation)

1. Ensure that your streaming device has Bluetooth enabled.
2. Turn the ignition (ACC) on.
3. The LED will start blinking to show it is in pairing mode.
4. Select "CYBOX" in your devices Bluetooth setup menu.
5. When successfully connected, the LED on the CYBOX will stop blinking and will remain lit.
6. A single beep will be heard through the connected sound system.

Controlling Audio Playback

- Once connected, audio is controlled from the streaming device. This includes volume, and media selection.
- The Cybox can be installed out of sight, as it has no user controls that needs to be accessed.