




- 1 | From the home screen click on the Smart icon at the bottom of the menu

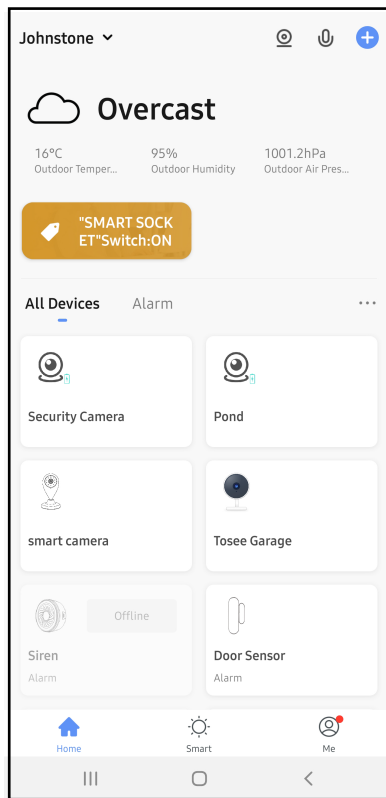


- 2 | Press on Automation

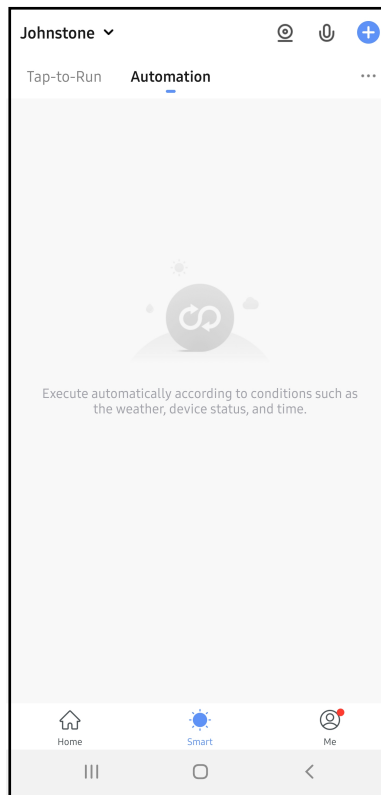


- 3 | Press on "When Device Status Changes"

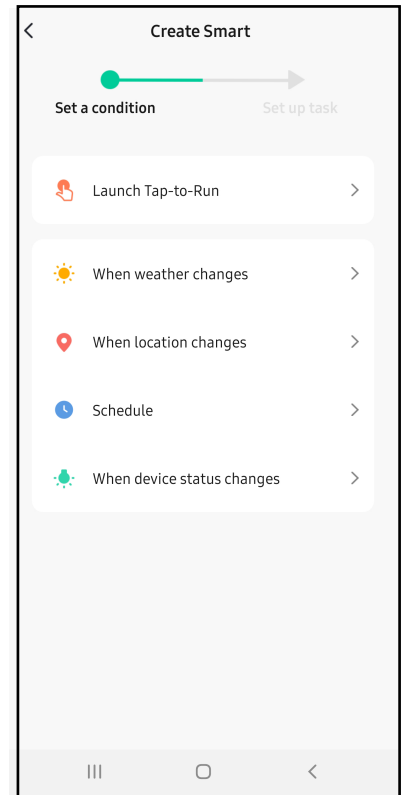


- 4 | Choose the device, for example "Door Sensor"

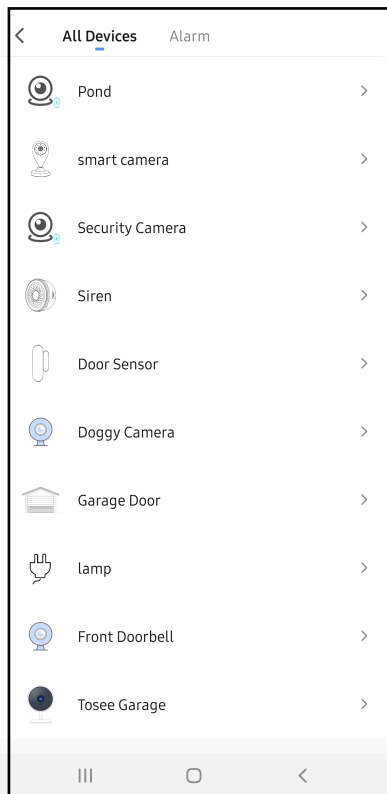


- 5 | Select "Status"

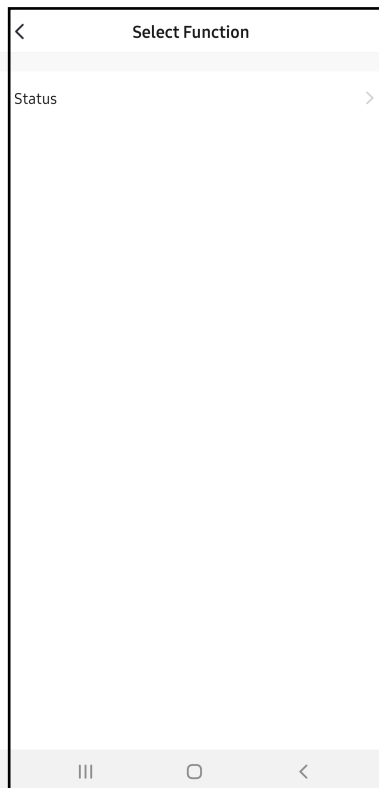


- 6 | Select "Open" (if PIR select Motion Sensor and then Alarm)

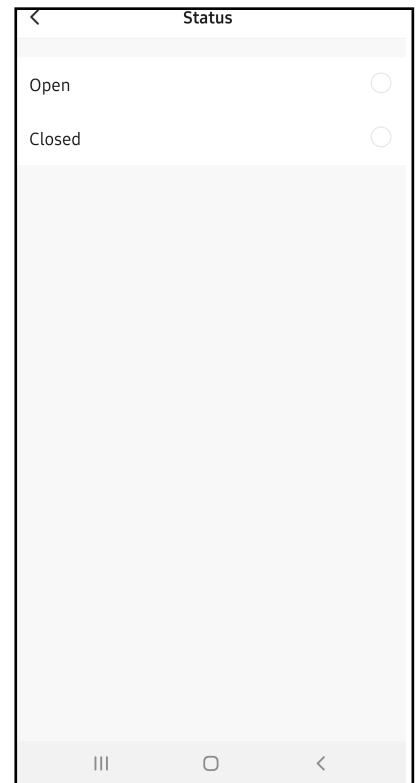


7 | Select "Run Device"

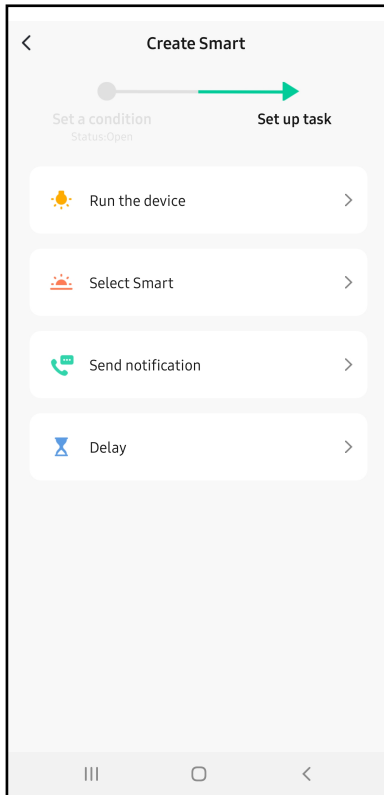


8 | Select device
(for Alarm Kit, choose Siren)

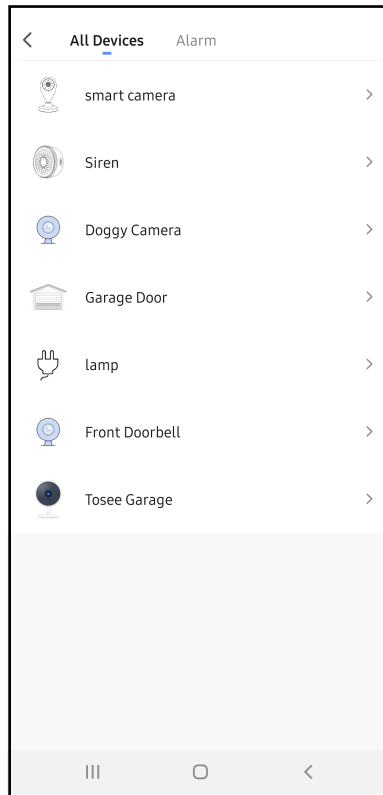


9 | Select "Alarm Period"

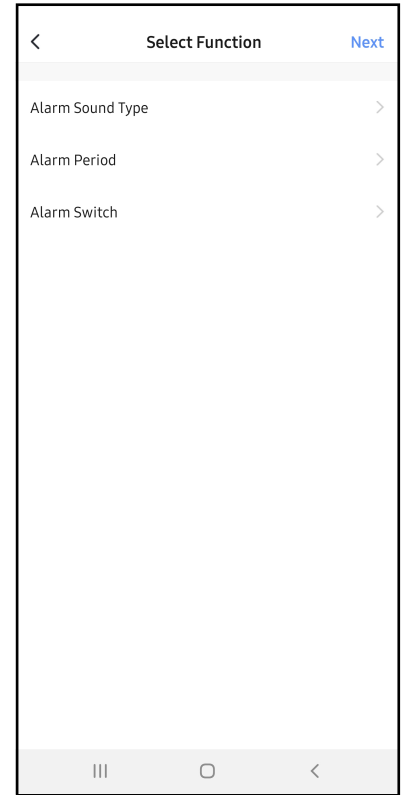


10 | Adjust how long you wish to have the Siren sound for by pressing the + button and save

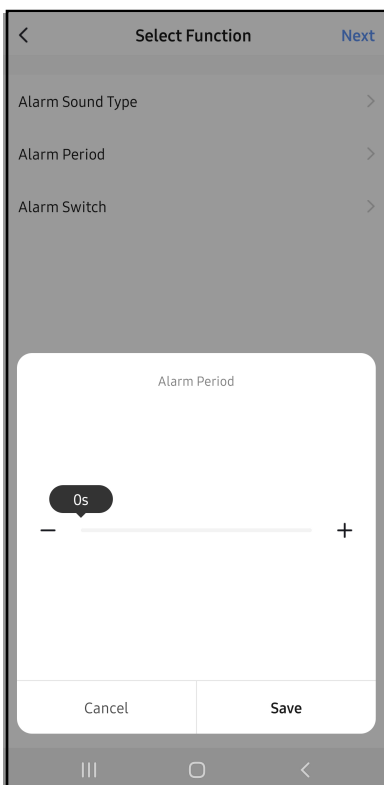


11 | Select "Alarm Switch"

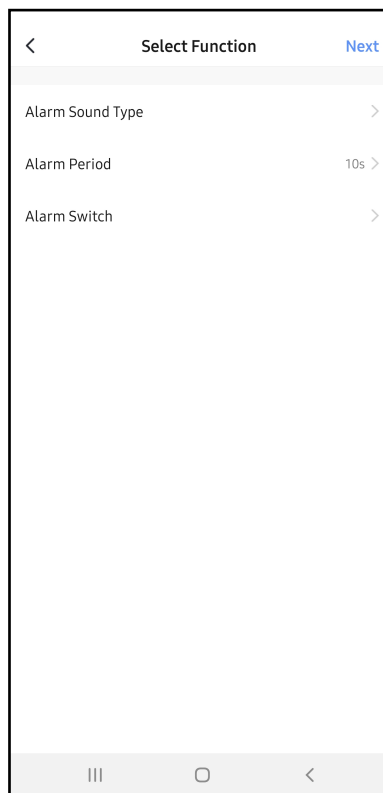


12 | Choose the action, (e.g when door sensor opened turn on Siren.) and press save.

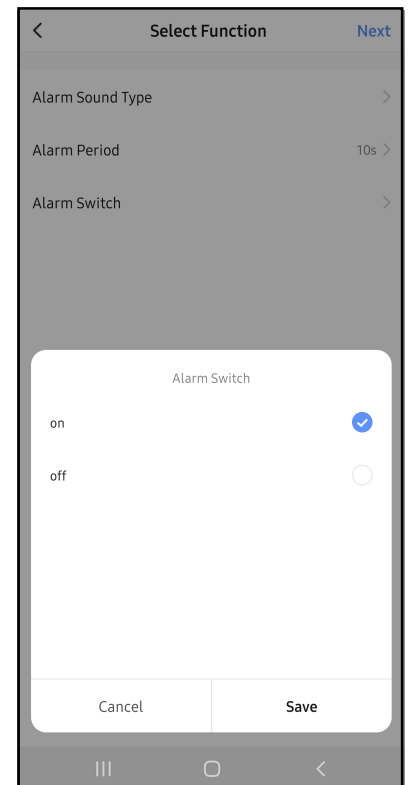


13 | Click "next"

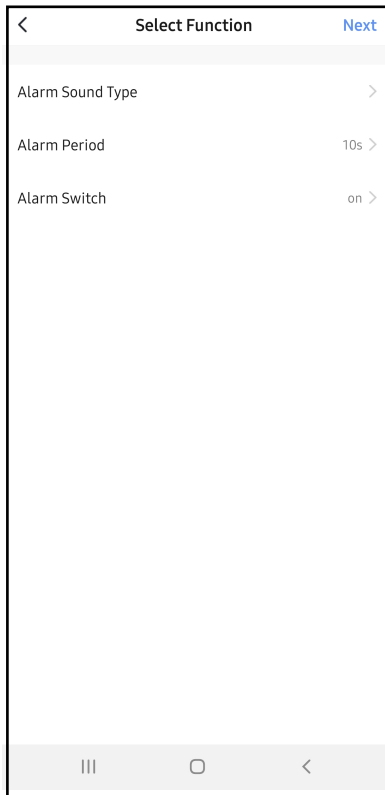

14 | Completed, this is where you can rename or edit the automation.

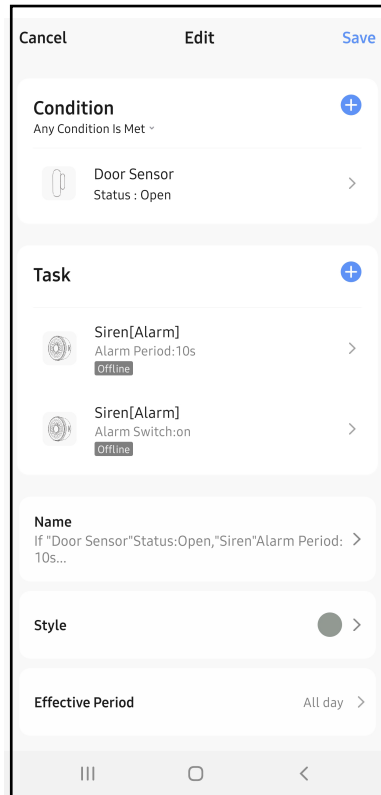

15 | Click "Save"

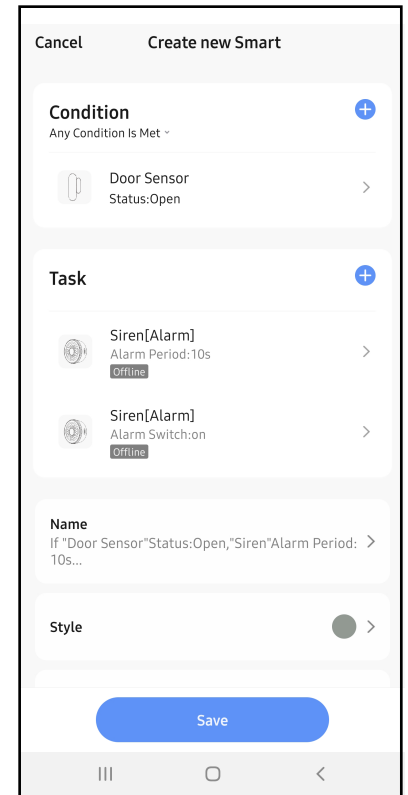

16 | All Automations will be on this page, you can go back and edit by pressing on the ...

