


To install additional Wi-Fi pods

We recommend additional pods to maximize coverage if your home has multiple floors or larger square footage.

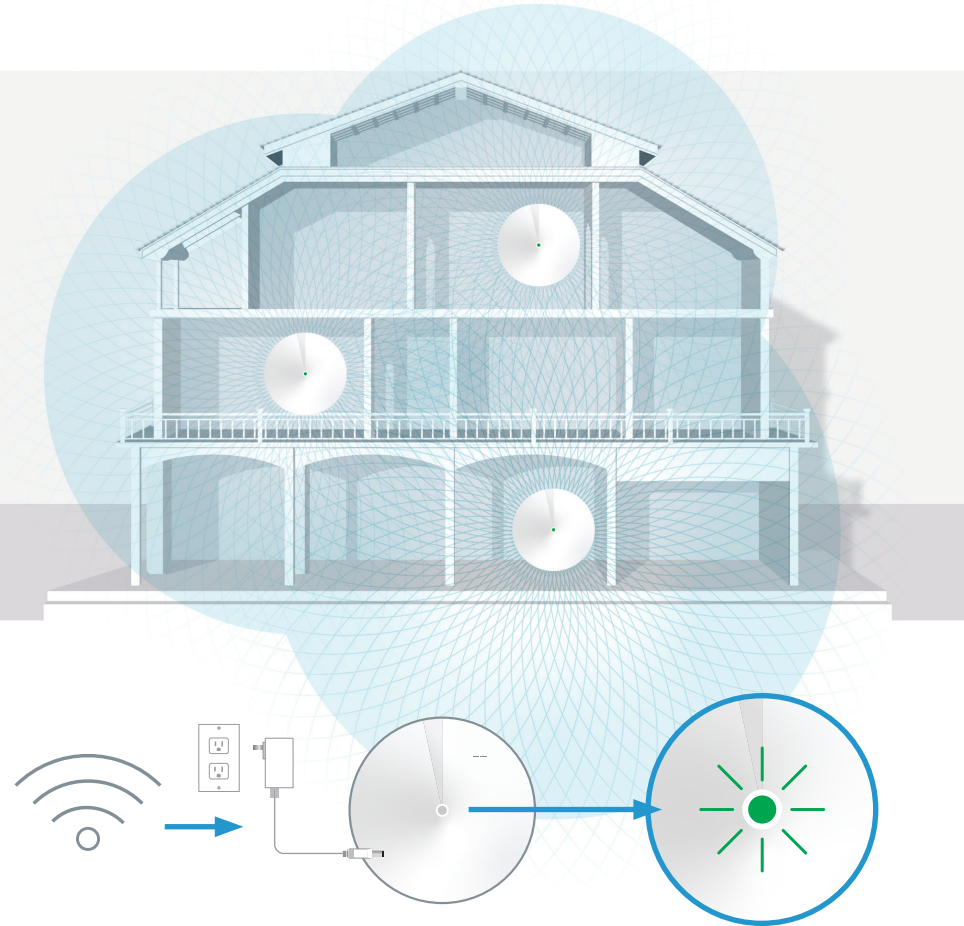

- Place the pod in the desired location within range of your Wi-Fi signal and connect the pod to a power outlet.
- When the light on the pod is solid green, your Wi-Fi is now active. If the light is red, position the additional pod closer to an active pod until the light is green the light is green.
- **Tip:** Use your smartphone to test the Wi-Fi strength in the location you are considering for the new pod.

Connecting Wired Devices

Each Wi-Fi Pod is equipped with two ethernet ports


These ports can be used to connect a nearby device.

For example:

- Home Phone Analog Telephone Adapter (ATA)
- TV Set Top Box
- Gaming Console
- Computer



Download the TP-Link Deco app from the Google Play or Apple App Store.



Use the app to customize your Wi-Fi Network (SSID) name and password.

You will also find other features such as: parental controls, anti-virus and how to create a separate network for guests.

For information on our products, or additional user guides visit **distributel.ca**

Contact our Customer Support team at **1-877-810-2877**

DISTRIBUTEL

DISTRIBUTEL

CBN8000 Modem

and Deco Wi-Fi Pod

Set Up Guide



Setting Up Your High Speed Internet Service and Wi-Fi Network

Before you begin:

> Review the contents of your install kit:

- Coax cable to connect to the network
- CBN modem and power cord

- Deco M5 Wi-Fi Pod and power cord
- Ethernet cable for your Wi-Fi pod
- Ensure you follow the steps in order shown

> Additional Resources:



You can find additional self-help resources at distributel.ca/support.

1 Connect one end of the **Coax Cable** to the **Cable** port on your modem, then connect the other end to a nearby coax wall outlet.

2 Place your Wi-Fi pod next to your internet modem. Using the **Ethernet Cable** provided, connect one end to **LAN Port 1** on your modem and the other end to a port on your Wi-Fi pod.

3 Attach the **Power Cord** to the **Power Port** on your modem, then plug the cord into a nearby power outlet. Connect your Wi-Fi pod to a **Power Outlet**. The Wi-Fi pod light will turn solid green. This can take about 5 minutes.

4 Go to Wi-Fi settings on a device you would like to connect, and search for available Wi-Fi networks. Select the **Wi-Fi Network (SSID)** and enter the password that matches those found on the bottom of your Deco M5 Wi-Fi pod.

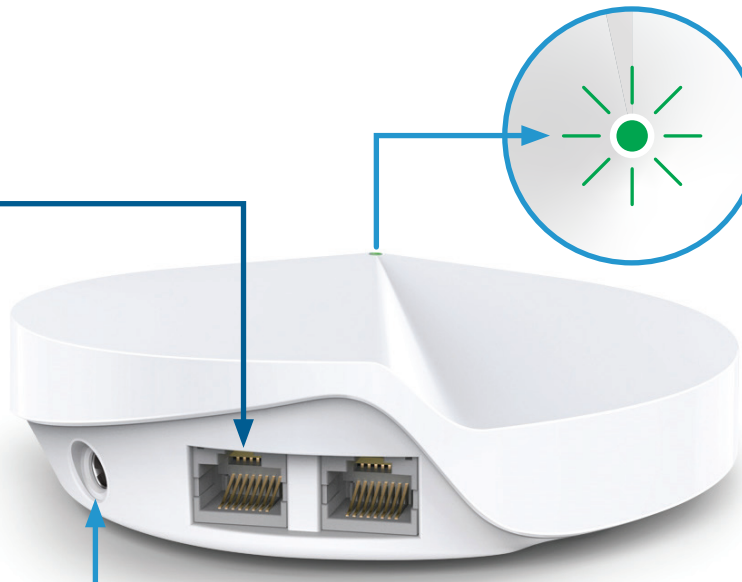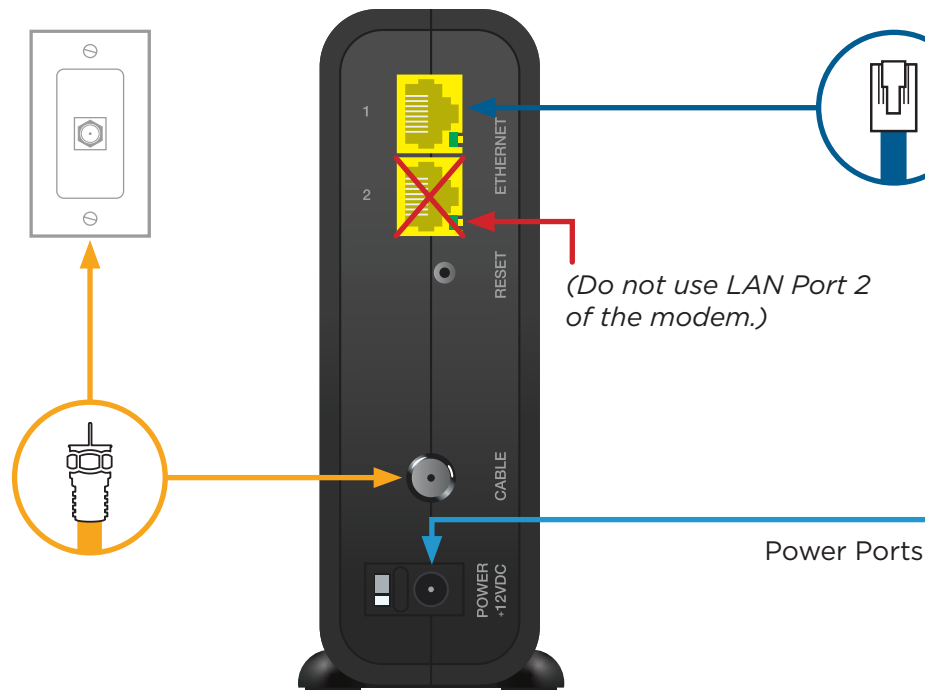

Tip: If the light is Red, reset the modem and pod by unplugging the power adapters.

Wait 30 seconds, plug in the modem.
Wait 30 seconds, plug in the pod.



That's it, you should now be ready to enjoy your Distributel Wi-Fi!

For help changing your Wi-Fi Network (SSID) name or Wi-Fi password and for additional security tips visit distributel.ca/support

