


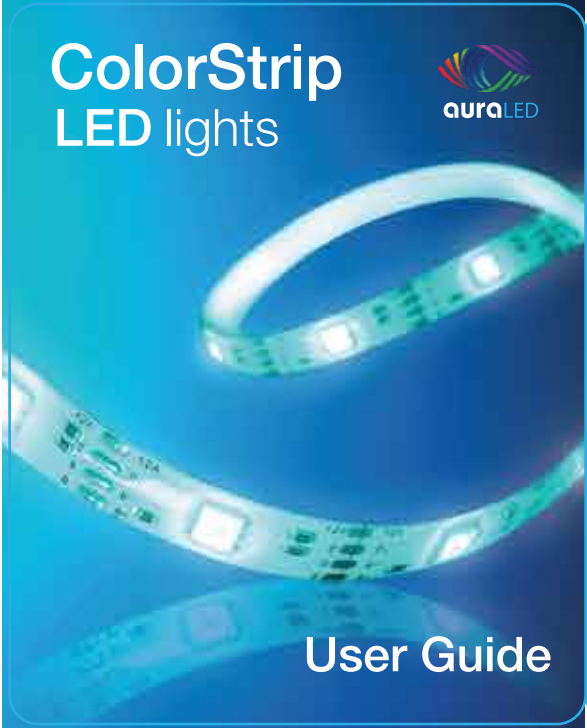


INTRODUCTION & FEATURES

Give your home living room a unique atmospheric twist with the TV LED Strip by aura. Designed with a safe adhesive backing, this colorful backlight can be fixed directly onto the back of your TV or computer screen, enhancing your home theater and easing light-induced fatigue. It fits screens up to 65" and includes a wireless remote controller, which provides you with the freedom to customize your selection of 16 colors and find the perfect brightness, rhythm, and color scheme. The ColorStrip is also perfect for holidays! It features a button on the remote that lets you cycle through light combinations to match your favorite holidays such as Independence Day, Halloween, and Christmas.

PACKAGE CONTENTS

- 12 ft. LED Strip
- Wireless Remote Control

PRODUCT OVERVIEW & FUNCTIONS

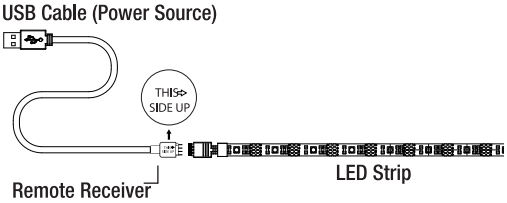

WIRELESS REMOTE CONTROL



CR2025 cell battery (included)

INSTALLATION

NOTE: Please make sure that the back surface of your TV is clean from dust, oils, or fingerprints before attempting to apply your LED Strip. Use an alcohol-based cleaning cloth to wipe the back of your TV.

1. Locate the USB port on the back of your TV. If your TV does not have a USB port, you may use any other USB power source.
2. Make sure that you are satisfied with the coverage area of the LED Strip prior to peeling off the adhesive tape. Make sure that the USB cable is placed near the USB port and has enough slack to reach safely. The Remote Receiver must also be visible in order to work properly.
3. Peel off the backing of the LED Strip to expose the adhesive.
4. Apply to the cleaned surface of the back of TV. Press down for a couple of seconds to secure.
5. Connect the LED Strip with the USB Cable and insert the cable into the USB port.

over 3

6. Once connected, remove the protective plastic strip from remote control to activate the battery.
7. Press the ON button to turn on the LED Strip.
8. Refer to the color combinations settings on the remote to customize your LED Strip.

ASSEMBLY

- Connect the LED Strip with the USB cable.



WIRELESS REMOTE GUIDE

Button 1 and 2 can be used to control the brightness for button 5, change the speed for button 6,7,8,9.



When Remote Control operation becomes slow, it is time to change the battery. Replace with new cell battery.

*Compatible with CR2025 - CR2032 battery types

LED LIGHT STRIP SPECS

Input	DC 5V/2A - 4A
Power Consumption	8W - 16W
LED Chip	5050, RGB
Color	16 colors with 4 Mood light settings
Beam Angle	120 degrees
LED Strip	108 LED lights / 12 ft (144")
Back Adhesive	Self Adhesive
Working Temperature	-20°C - 45°C
Working Humidity	0% - 80% RH

IMPORTANT SAFEGUARDS

- Keep LED strip away from flammable objects.
- Always make sure that all parts have been connected properly to avoid short circuit.
- Check to make sure the voltage of the power source (USB) is 5V.
- Do not connect the LED strip to the power source until all of the installation have been completed.
- To trim the LED strip to a desirable size, cut along any of the dotted lines.
- Always make sure that the Remote Receiver is not covered or blocked. This will ensure proper operation using the remote control.
- If this product malfunctions, please do not try to repair it yourself, take it to a qualified electrician.

If you have any other questions or issues with product use and care, please contact tzumi Technical Support at: support@tzumi.com or 1-855-Go-TZUMI.



tzumi™ Inc. Distributed by tzumi Inc. NY, NY 10016. © Copyright 2022 tzumi Inc. All Rights Reserved. Made in China. Other trademarks and trade names are those of their respective owners. Subject to change without prior notice.



7