





USER MANUAL

Model: XP-QIC2

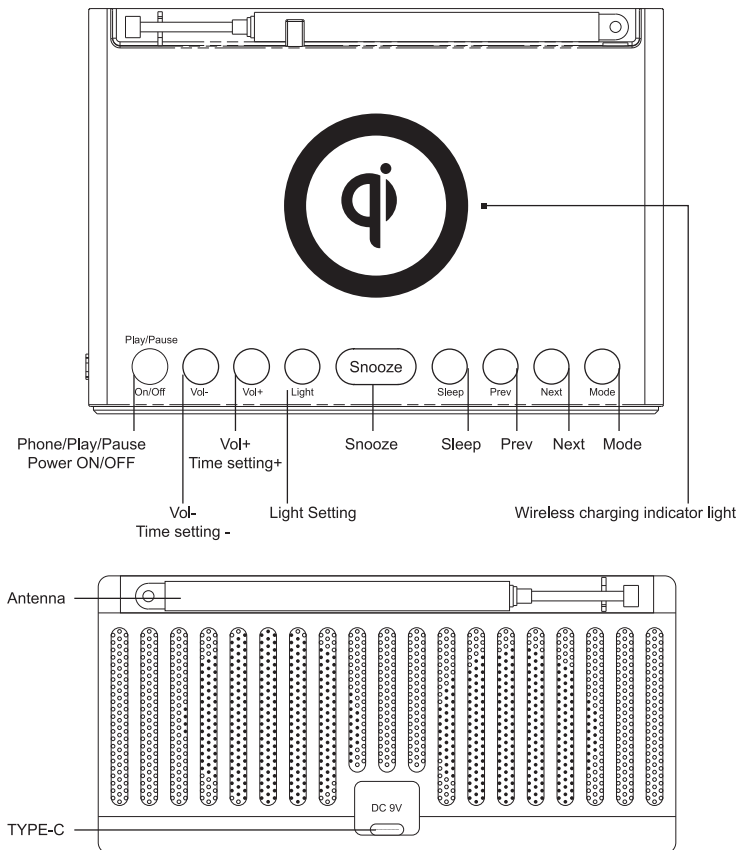

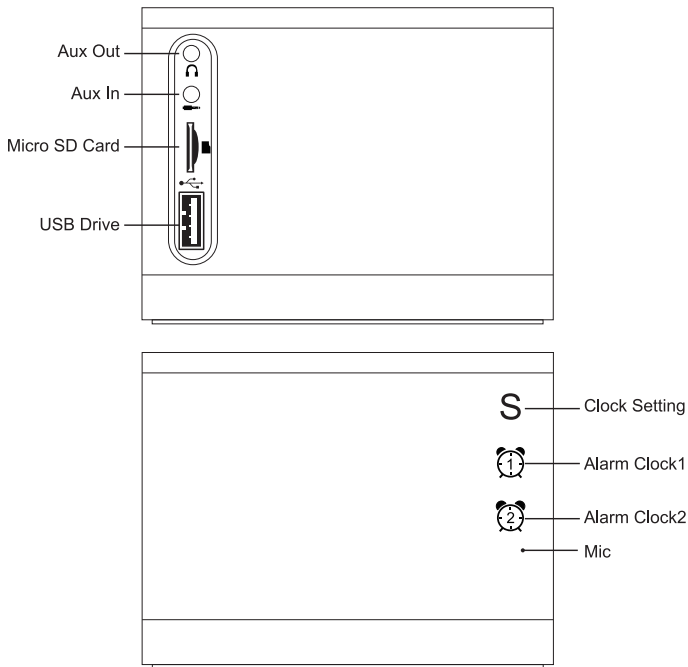

Charging the battery:

- Battery indicator:
 - 1) It will ON when charging
 - 2) At power off state, the indicator will OFF after fully charged
 - 3) It will FLASH when low battery
 - 4) At power on state, the indicator will keep ON after fully charged

The battery indicator can not show the battery %, it will only On/Off/Flash.

Power on/off:

- Long press the “Power On/Off” button to power on/off the unit.



Wireless charging:

- When power on, put your device (which with wireless charging function) on it to charge, the blue indicator light will be on (blue light would be flash when detects other subjects).

Bluetooth pairing:

- With the speaker turned on, it comes to clock mode with time displayed on LED area. Short press “M” button, the Bluetooth icon will be flashed (this means that the Bluetooth mode has been activated).
- Open the Bluetooth® settings on your phone, tablet or other Bluetooth enabled audio device, make sure Bluetooth is on and search for “XPower QIC2”. When prompted for the pairing code, enter 0000.
- Once paired, the Bluetooth icon will stop flashing and steady on.

Playing music:

- Select desired song or playlist on your phone, tablet or other Bluetooth enabled audio device.
- Short press “play/pause” button to start or pause the music.
- Short press the “Pre” button or “Next” button to go to previous or next song.
- Short or long press the “Volume +/-” button to adjust the volume.

Hands-free for calling:

- Pick up or hang up a call by pressing the “Phone” button.
- Long press the “Phone” button to reject when a new call comes in.
- Short press the “Phone” button by twice to redial the last phone call.

Using the AUX in / Micro SD card/USB drive:

- Insert a Micro SD card/USB drive directly into the unit to play music via the speaker.
- Playable Format: MP3.



- Max size of Micro SD card that can be connected: 32GB

Using the AUX out:

- Can use headset to input 3.5mm earphone jack, when headset is plugged in will cut the outside sound.

FM radio mode:

- Short press “M” button to enter FM Radio Mode. (You can adjust the antenna to increase the signal.)
- Long press “M” button that it will search channels automatically and the channels will be stored after auto search ends.
- Short press “play/pause” button to start or pause the FM radio playing.
- Short press “Pre” button or “Next” button to go to previous or next channel.

Clock/Month/Date setting:

- Short press the “Clock setting” button to switch 12/24H.
- Long press the “Clock setting” button to enter setting.
- Short press the “Clock setting” to changed to adjust the Hour/Minute/Year/Month/Date, the digital display will be flashed then short press the “Time Setting+/Time Setting-” to adjust the Hour/Minute/Year/Month/Date accordingly.
- After all setting finished, long press the “Clock setting” to confirm.

Alarm clock 1:

- Short press the “Alarm clock 1” button to turn on/off the Alarm.
- Long press the “Alarm clock 1” button enter alarm clock setting:
 - 1.The hour digital will be flashed, you can short press the “Time Setting+/Time Setting-” button to adjust the hours.
 - 2.Short press the “Alarm clock 1” button changed to adjust the minutes, and the minute digital will be flashed, then short press the “Time Setting+/Time Setting-” button to adjust the minute.
 3. Short press the “Alarm clock 1” button changed to ringtone setting, then short press the “Time Setting+/Time Setting-” to

select 1-5 ringtone.

4.Short press the “Alarm clock 1” button changed to Ringtone volume setting, short press the “Time Setting+/Time Setting-” button to adjust it.

5.Long press the “Alarm clock 1” to confirm the setting.

Alarm clock ringtone:

- Option 1-3, Built-in Speaker ringtone.
- Option 4, From the last song of TF card/USB drive function.
- Option 5, From the last channel of the FM function.

SNOOZE function:

When the alarm clock rings, short press the “SNOOZE” button to snooze it, the alarm 1 icon will be flashing, and it will rings after 5 minutes.

Alarm clock 2:

- The setting of Alarm clock 2 same as the Alarm clock 1.

Tip: Short press the “Alarm clock 1 or 2” button to stop the currenty alarm clock, and it will rings again on next same time.(if you have not short press the “Alarm clock 1/2” to cancel this alarm clock)

Sleep timer

When you playing music by Bluetooth/TF card/Aux in/FM radio, you can open the sleep timer functionality:

1. Short press the “Sleep” button that it will display the number 30, after 3 seconds, it will automatically turn on the timer for after 30 minutes to stop playing music and return to the clock mode.
2. Short press the “Sleep”button can be selected: 30→60→120→180(minutes)→OFF.

Dimmer:

- Short press the “Light” button to switch three screen brightness states.(Darkest→ Medium→ Brightest)
- Long press the “Light” button to turn off/on the LED display.

Attentions:

- Please do not vigorously extrude or collide.
- Please do not dismantle or put it into fire or water when the product is power on to avoid short circuit or leakage or corrosive environment, to avoid damage to the circuit leakage. card, bankcard etc.) on the wireless charger to avoid to cause
- Please do not use it in severely high temperature, high humidity.
- Please do not put the magnetic strip or chip card on the wireless charger, otherwise ID magnetic card will lose efficacy.
- Please do not put the metal (Such as coin etc.) on the wireless charger when charging, to avoid damage from heating.
- Avoid crash, hit, scrap, throw and prevent any damage to the product.
- You may use the dry cloth to clean the product but avoid to use with any chemical cleaning product.
- XPower QIC2 is using built-in intelligence chip to avoid short circuit, over charge, over heat, over current, etc. XPower purchases USD200 million 3rd party product liability insurance. Public and Products Liability Insurance provides you with funds to pay compensation to a third party arising from injury or damage if proved product damage from XPower product.
- If the weather or temperature is hot, the temperature of the XPower QIC2 and the mobile may be higher than normal during charging. The temperature will be higher when put both devices together. Thus, it is better if putting the XPower QIC2 in the air circulation environment and should be avoided storing in the handbag, on or under the bed, etc.
- If you have any technical problem on our product, please feel free to contact our customer service department.

