


## QUICK START GUIDE

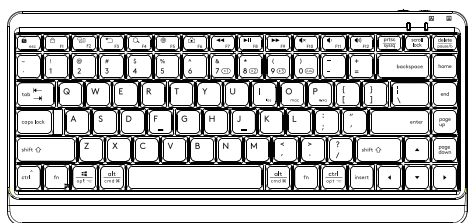

FBK11/FBKs11

Bluetooth® 2.4G

F5TYLER COLLECTION

## WHAT'S IN THE BOX



Bluetooth/2.4G Wireless Keyboard



2.4G Nano Receiver



USB Extension Cable



2 AAA Alkaline Batteries



User Manual

## THE FRONT

FN Locking Mode




12 Multimedia & Internet Hotkeys

Multi-Device Switch


Operating System Swap

PC/MAC Dual-Function Keys

## THE FLANK / BOTTOM

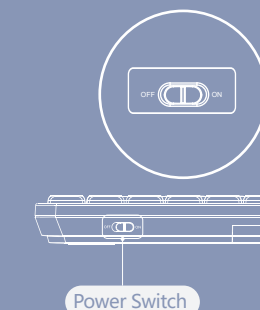


Power Switch

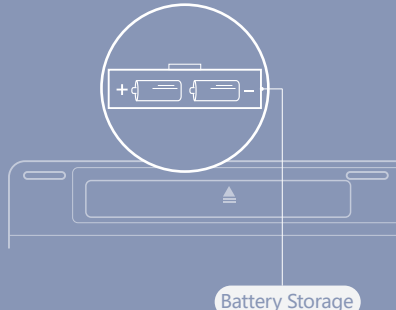


Battery Storage


## CONNECTING 2.4G DEVICE



1 Plug the receiver into the computer's USB port.




2 Turn on the keyboard power switch.



3 Indicator  
Yellow light will be solid (10S).  
The light will be off after connected.

Note: USB extension cable is recommended to connect with Nano receiver. (Make sure the keyboard is closed to the receiver within 30 cm)

## CONNECTING BLUETOOTH DEVICE 1 (For Mobile Phone/Tablet/Laptop)



1 Short-press FN+7 and choose Device 1 (Indicator shows blue light for 5S).



2 Long-press FN+7 for 3S and blue light flashes slowly when pairing.




3 Turn on the Bluetooth of your device, search and locate the BT name on device: [A4 FBK11].




4 After connection is established, the indicator will be solid blue for 10S then will be off automatically.


## CONNECTING BLUETOOTH DEVICE 2 (For Mobile Phone/Tablet/Laptop)



1 Short-press FN+8 and choose Device 2 (Indicator shows green light for 5S).



2 Long-press FN+8 for 3S and green light flashes slowly when pairing.




3 Turn on the Bluetooth of your device, search and locate the BT name on device: [A4 FBK11].



4 After connection is established, the indicator will be solid green for 10S then will be off automatically.


## CONNECTING BLUETOOTH DEVICE 3 (For Mobile Phone/Tablet/Laptop)



1 Short-press FN+9 and choose Device 3 (Indicator shows purple light for 5S).



2 Long-press FN+9 for 3S and purple light flashes slowly when pairing.



3 Turn on the Bluetooth of your device, search and locate the BT name on device: [A4 FBK11].



4 After connection is established, the indicator will be solid purple for 10S then will be off automatically.

## OPERATING SYSTEM SWAP

Windows / Android is default system layout.

| System            | Shortcut<br>[Long-Press for 3S] | Device / Layout Indicator                       |
|-------------------|---------------------------------|-------------------------------------------------|
| iOS               | +                               | Light will be off automatically after flashing. |
| Mac               | +                               | Light will be off automatically after flashing. |
| Windows & Android | +                               | Light will be off automatically after flashing. |

Note: The layout you used last time will be remembered. You can switch the layout by following the above step.

## INDICATOR (For Mobile Phone/Tablet/Laptop)



Keyboard



2.4G Device



Bluetooth Device 1



Bluetooth Device 2



Bluetooth Device 3

| Indicator                         | Yellow Light    | Blue Light                                         | Green Light                                        | Purple Light                                       |
|-----------------------------------|-----------------|----------------------------------------------------|----------------------------------------------------|----------------------------------------------------|
| Multi-Device Switch               | +               | +                                                  | +                                                  | +                                                  |
| Device Switch: Short-Press for 1S | Solid Light 5S  | Solid Light 5S                                     | Solid Light 5S                                     | Solid Light 5S                                     |
| Pair Device: Long-Press for 3S    | No Need to Pair | Pairing: Flashes Slowly Connected: Solid Light 10S | Pairing: Flashes Slowly Connected: Solid Light 10S | Pairing: Flashes Slowly Connected: Solid Light 10S |

## FN MULTIMEDIA KEY COMBINATION SWITCH


FN

FN Mode: You can lock & unlock Fn mode by short pressing FN + ESC by turn.



- Lock Fn Mode: No need to press FN key
- Unlock Fn Mode: FN + ESC

※ After pairing, FN shortcut is locked in FN mode by default, and the locking FN is memorized when switching and shutting down.



## OTHER FN SHORTCUTS SWITCH

FN

| Shortcuts | Windows                                                                                                                                                         | Android      | Mac / iOS    |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|--------------|
| +         | <b>Switching Steps:</b><br>① Choose iOS layout by pressing FN+I.<br>② Choose MAC layout by pressing FN+O<br>③ Choose Windows / Android layout by pressing FN+P. |              |              |
|           | Pause                                                                                                                                                           | Pause        | Pause        |
|           | Brightness +                                                                                                                                                    | Brightness + | Brightness + |
|           | Brightness -                                                                                                                                                    | Brightness - | Brightness - |
|           | Screen Lock                                                                                                                                                     | Screen Lock  | Screen Lock  |
|           | Screen Lock                                                                                                                                                     | Screen Lock  | Screen Lock  |

Note: The final function refer to the actual system.


## DUAL-FUNCTION KEY

Multi-System Layout

| Keyboard Layout | Windows / Android (W / A) | Mac / iOS (ios / mac) |
|-----------------|---------------------------|-----------------------|
|                 | Ctrl                      | Control ^             |
|                 | Start                     | Option                |
|                 | Alt                       | Command               |
|                 | Alt                       | Command               |
|                 | Ctrl                      | Option                |

## LOW BATTERY INDICATOR

Low Battery Indicator

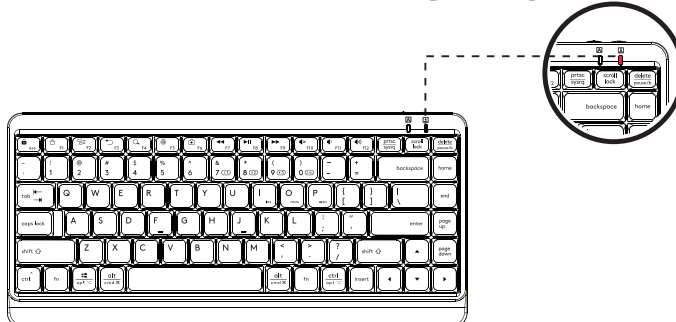

Flashing Red light when the battery is below 10%.

## SPECIFICATIONS

Specifications

Connection: Bluetooth / 2.4G

Operating Range: 5~10 M

Multi-Device: 4 Devices (Bluetooth x 3, 2.4G x 1)

Layout: Windows | Android | Mac | iOS

Battery: 2 AAA Alkaline Batteries

Battery Life: about 650H (12 Months)

Receiver: Nano USB Receiver

Includes: Keyboard, Nano Receiver, 2 AAA Alkaline Batteries,

USB Extension Cable, User Manual

System Platform: Windows | Mac | iOS | Android...

## Q & A

Q & A

**Question** How to switch layout under different system?

**Answer** You can switch layout by pressing FN + I / O / P under Windows | Android | Mac | iOS.

**Question** Does the layout can be remembered?

**Answer** The layout you used last time will be remembered.

**Question** How many devices can be connected?

**Answer** Interchange and connect up to 4 devices at the same time.

**Question** Does the keyboard remember the connected device?

**Answer** The device you connected last time will be remembered.

**Question** How can I know the current device is connected or not?

**Answer** When you turn on your device, the device indicator will be solid. (disconnected: 5S, connected: 10S)

**Question** How to switch between connected Bluetooth device 1-3?

**Answer** By pressing FN + Bluetooth shortcut ( 7 - 9 ).

## WARNING STATEMENT

Warning Statement

The following actions may damage the product.

- To disassemble, bump, crush, or throw into fire is forbidden for the battery.
- Do not expose under the strong sunlight or high temperature.
- The discard of battery should obey to the local law, if possible please recycle it.  
Do not dispose it as household garbage, because it may cause an explosion.
- Do not continue to use if severe swelling occurs.
- Please do not charge the battery.

EST. 1987  
A4TECH®

F5TYLER  
COLLECTION



www.a4tech.com



Scan for E-Manual