


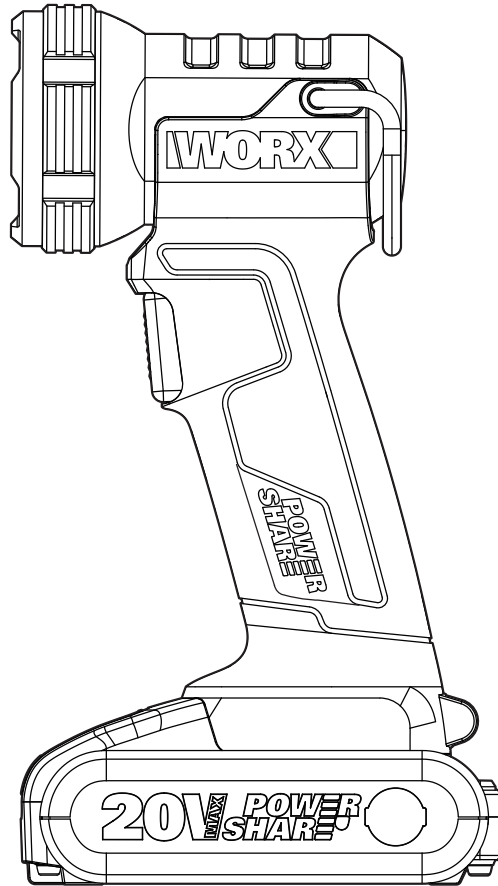

SAFETY AND OPERATING MANUAL

ORIGINAL INSTRUCTIONS

20V Cordless Jobsite Light
WX025 WX025.X



TABLE OF CONTENTS

1. PRODUCT SAFETY
2. COMPONENT LIST
3. TECHNICAL DATA
4. OPERATING INSTRUCTIONS
5. MAINTENANCE
6. CLEANING
7. DECLARATION OF CONFORMITY

1. PRODUCT SAFETY SAFETY POINTS FOR YOUR FLASHLIGHT/ WORKLIGHT SAFETY RULES FOR CORDLESS PORTABLE HAND-HELD LIGHT CHARGE BATTERY BEFORE FIRST USE

 **CAUTION:** Read, understand and follow all Safety Rules and Operating Instructions in this Manual before using this product.

SAVE THESE INSTRUCTIONS! READ ALL INSTRUCTIONS!

SAFETY INSTRUCTIONS

 **WARNING:** Be sure to read and understand all instructions in this manual before using this portable hand-held light. Failure to follow all instructions may result in electric shock, fire and/or serious personal injury.

1. **Know your cordless portable hand-held light. Read operator's manual carefully.**
Learn its applications and limitations, as well as the specific potential hazards related to this light.
2. **Use only recommended battery pack and charging stand / transformer.**
Any attempt to use another battery pack will cause damage to the portable hand-held light and could possibly explode, cause a fire, or personal injury.

Model	Battery Pack	Charging Stand/ Transformer
WX025 WX025.X	2.0Ah WA3551	2.0 A Charger WA3880

3. **Remove battery pack from portable hand-held light before replacing bulb or performing any routine maintenance or cleaning.**
4. Let portable hand-held light cool for several minutes after use before changing the bulb.
5. Do not disassemble the portable hand-held light.
6. Do not place portable hand-held light or battery pack near fire or heat. They may explode. Also, do not dispose of a worn out battery pack by incineration, even if it is severely damaged or completely worn out. The battery may explode in fire.
7. **Do not operate portable hand-held light or charging stand/transformer near flammable liquids or in gaseous or explosive atmospheres.** Internal sparks may ignite fumes.
8. **To reduce the risk of electric shock, do not put portable hand-held light in water or other liquid.** Do not place or store portable hand-held light where it can fall or be pulled into a tub or sink.
9. **Do not permit children to use portable hand-held light unsupervised. It is not a toy.** The temperature of the bulb will become hot after being on only a short period of time. This hot temperature can cause burn injury if touched.
10. **DO NOT USE OR PERMIT USE OF PORTABLE HAND-HELD LIGHT IN BED OR SLEEPING BAGS.** This portable hand-held light lens can melt fabric and a burn injury could result.
11. **Keep light dry, clean, and free from oil and grease. Always use a clean cloth when cleaning.** Never use brake fluid, gasoline, petroleum-base products or any strong solvent to clean the portable hand-held light.
12. **The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.**

SAFETY WARNINGS FOR BATTERY PACK

- a) **Do not dismantle, open or shred cells or battery pack.**
- b) **Do not short-circuit a battery pack. Do not store battery packs haphazardly in a box or drawer where they may short-circuit each other or be short-circuited by conductive materials.**
When battery pack is not in use, keep it away from other metal objects, like paper clips, coins, keys, nails, screws or other small metal objects,





that can make a connection from one terminal to another. Shorting the battery terminals together may cause burns or a fire.







- c) **Do not expose battery pack to heat or fire. Avoid storage in direct sunlight.**
- d) **Do not subject battery pack to mechanical shock.**
- e) **In the event of battery leaking, do not allow the liquid to come into contact with the skin or eyes. If contact has been made, wash the affected area with copious amounts of water and seek medical advice.**
- f) **Keep battery pack clean and dry.**
- g) **Wipe the battery pack terminals with a clean dry cloth if they become dirty.**
- h) **Battery pack needs to be charged before use. Always refer to this instruction and use the correct charging procedure.**
- i) **Do not maintain battery pack on charge when not in use.**
- j) **After extended periods of storage, it may be necessary to charge and discharge the battery pack several times to obtain maximum performance.**
- k) **Recharge only with the charger specified by Worx. Do not use any charger other than that specifically provided for use with the equipment.**
- l) **Do not use any battery pack which is not designed for use with the equipment.**
- m) **Keep battery pack out of the reach of children.**
- n) **Retain the original product literature for future reference.**
- o) **Remove the battery from the equipment when not in use.**
- p) **Dispose of properly.**
- q) **Do not mix cells of different manufacture, capacity, size or type within a device.**
- r) **Keep the battery away from microwaves and high pressure.**

SYMBOLS

	To reduce the risk of injury, user must read instruction manual.
	Batteries may enter water cycle if disposed improperly, which can be hazardous for ecosystem. Do not dispose of waste batteries as unsorted municipal waste.
	Do not burn.

	Class III
	Replace any cracked protective shield.
   	Li-Ion battery This product has been marked with a symbol relating to 'separate collection' for all battery packs and battery pack. It will then be recycled or dismantled in order to reduce the impact on the environment. Battery packs can be hazardous for the environment and for human health since they contain hazardous substances.
	Waste electrical products must not be disposed of with household waste. Please recycle where facilities exist. Check with your local authorities or retailer for recycling advice.
	Do not stare at the operating light source
	For indoor use only.
	RCM marking
	ABN: Australian Business Number. By this number, business information such as entity type, status, business location etc. can be found at website http://abr.business.gov.au. ABN of Positec Australia Pty Limited is 14 101 682 357

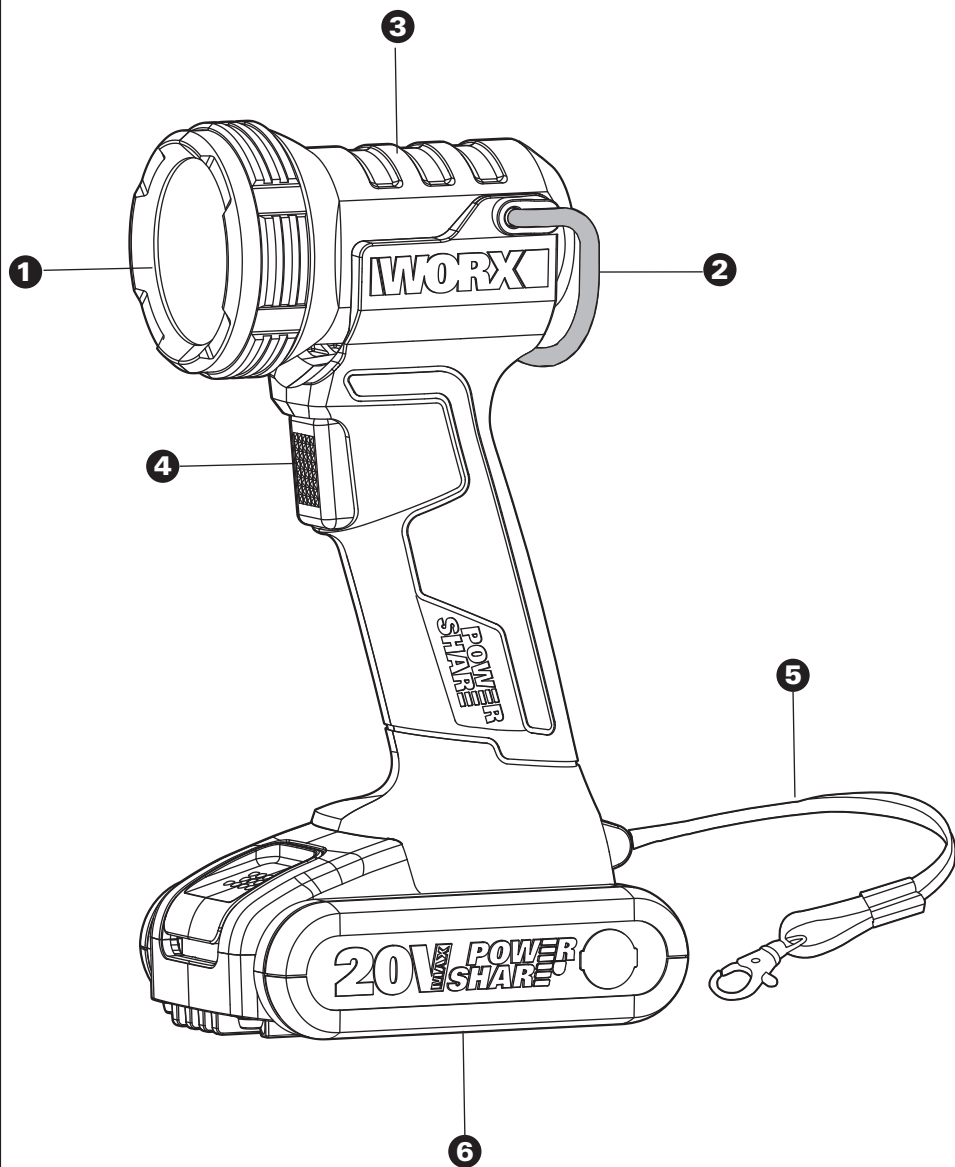

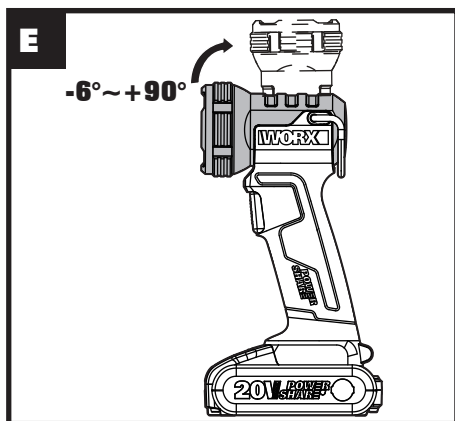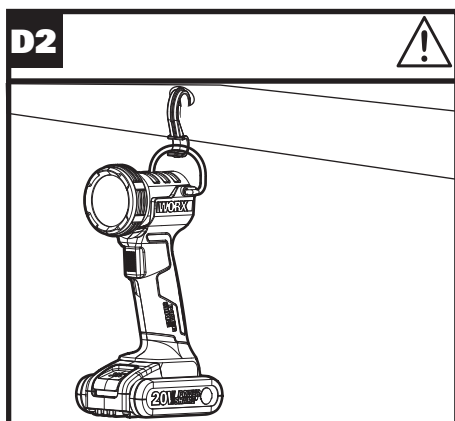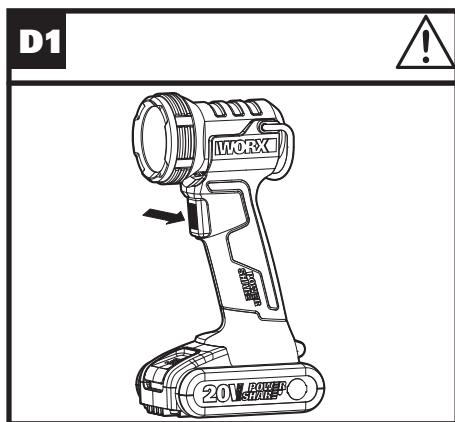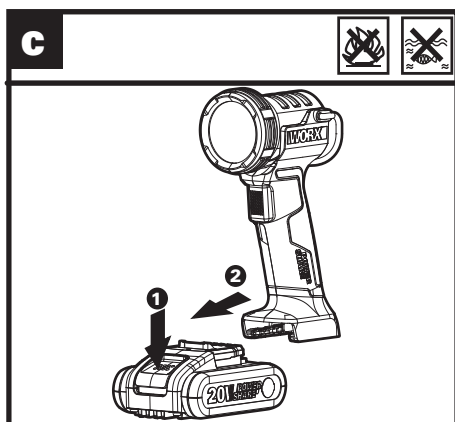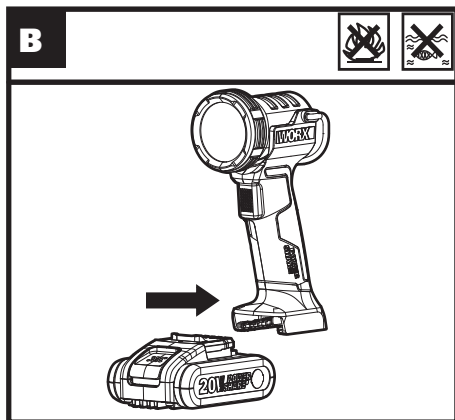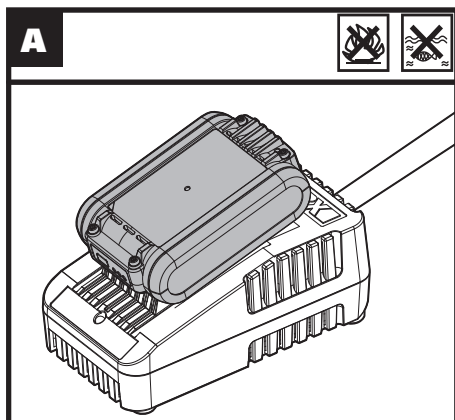

2. COMPONENT LIST

1. LED LIGHT
2. HOOK
3. ROTATING HEAD
4. ON/OFF SWITCH
5. LANYARD
6. 20V BATTERY PACK*

* Not all the accessories illustrated or described are included in standard delivery.

3. TECHNICAL DATA

		WX025 WX025.X**
Rated voltage		20V $\overline{\text{---}}$ Max***
Burntime (2.0Ah)	High Brightness	7.5 hrs
	Low Brightness	16.5 hrs
Brightness		160/350 LM
Pivoting head		-6°~+90°
Machine weight (bare tool)		0.26kg

** X=1-999, A-Z, M1-M9 there are only used for different customers, there are no safe relevant changes between these models.

*** Voltage measured without workload. Initial battery voltage reaches maximum of 20 volts. Nominal voltage is 18 volts.

SUGGESTED BATTERIES AND CHARGERS

Category	Type	Capacity
20V Battery	WA3551	2.0Ah
20V Charger	WA3880	2.0A

We recommend that you purchase your accessories from the same store that sold you the tool. Choose the type according to the work you intend to undertake. Refer to the accessory packaging for further details. Store personnel can assist you and offer advice.

4. OPERATING INSTRUCTIONS



NOTE: Before using the tool, read the instruction book carefully.

ACTION	FIGURE
BEFORE OPERATION	
Charging the battery pack	See Fig.A
Installing/Removing the battery pack	See Fig.B,C
OPERATION	
Press the ON/OFF switch to turn the light on and off.  WARNING: Do not direct the light beam into eyes.	See Fig.D1
Carrying or Hanging the Portable Light	
Utilize the hook to hang the light for illumination.  Warning! Do not hang the Work light on any electrical power cord!	See Fig.D2
 WARNING! The hook is only used to lift the light and is not intended to bear any additional weight or support your weight in any situation	
Rotate the head of the light within the range of -6° to 90°.	See Fig.E

5. MAINTENANCE

Your tool requires no additional lubrication or maintenance. There are no user serviceable parts in your tool. Never use water or chemical cleaners to clean your tool. Wipe clean with a dry cloth. Always store your tool in a dry place.

6. CLEANING

Use a dry clean cloth wipe the light and make sure not to use water or immerse the light into water for cleaning.

 **WARNING:** Never use solvents or other harsh chemicals to clean the light. Never let any liquid slide into the light.

Positec Australia Pty Limited
10 Corporate Blvd Bayswater, VIC 3153, Australia

7. DECLARATION OF CONFORMITY

We,
Positec Germany GmbH
Postfach 32 02 16, 50796 Cologne, Germany

On behalf of Positec declare that the product,
Description **20V Cordless Jobsite Light**
Type **WX025 WX025.X**
Function **Lighting**

Complies with the following Directives,
2011/65/EU&(EU)2015/863,
2014/30/EU,
(EU) No 1194/2012 amended by EU No 2015/1428

Standards conform to
EN IEC 55015,
EN 61547,
EN 60598-1,
EN 60598-2-4,
EN 62493,
EN 60598-2-8



2022/07/22
Allen Ding
Deputy Chief Engineer, Testing & Certification
Positec Technology (China) Co., Ltd
18, Dongwang Road, Suzhou Industrial
Park, Jiangsu 215123, P. R. China



DECLARATION OF CONFORMITY

We,
Positec (UK & Ireland) Ltd.
PO Box 6242, Newbury, RG14 9LT, UK

On behalf of Positec declare that the product,
Description **20V Cordless Jobsite Light**
Type **WX025 WX025.X**
Function **Lighting**

Complies with the following regulations:
Electromagnetic Compatibility Regulations 2016
The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations

Standards conform to,
BS EN IEC 55015, BS EN 61547, BS EN 60598-1, BS EN 60598-2-4, BS EN 62493, BS EN 60598-2-8



2022/07/22
Allen Ding
Deputy Chief Engineer, Testing & Certification
Positec Technology (China) Co., Ltd
18, Dongwang Road, Suzhou Industrial
Park, Jiangsu 215123, P. R. China



WORX
you've got the power

After-sales Service and Application

At www.worx.com you can order spare parts or arrange the collection of a product in need of servicing or repair.

Tel. Service: 0345 202 9679

E-Mail: customerservices@worxtools.com

www.worx.com

Copyright © 2022, Positec. All Rights Reserved.
AR01673200

