



RAZER BLADE 2016 FIRMWARE UPDATE

HOW TO UPDATE YOUR FIRMWARE

RAZER BLADE 2016 FIRMWARE UPDATER DETAILS AND INSTUCTIONS

This updater is intended for use with only the following model numbers. Do not attempt to use this firmware on any other model. You can view your model number by looking at the bottom panel of your Razer Blade 2016.

RZ09-01952xxx-xxxx

This firmware will update your firmware to version 0.38.16

This firmware will adjust the timing and speed of your fans and help reduce undesirable noise coming from the fans. Other than the fan adjustments this will not affect the performance of your Blade in anyway.

Please follow the instructions on the pages below to update the firmware of your Blade. Should you have any questions or issues with this update please feel free to reply to your open support ticket or call us at the numbers listed below.

Canada/US: 1-855-872-5233

Australia: 1800-172937

Dubai: +971 4 388 33 71

Singapore: 800-601-1456

Korea: 0079885238003

Japan: 012 094 1981

Taiwan: 0809093203

Malaysia: 1800-8872937


Philippines: 1800-18530041

Thailand: +66 2018 2411

Europe: 00800-25233758


INSTRUCTIONS FOR UPDATING THE FIRMWARE

1. Download the supplied Customer Firmware Updater and save it to the Blade you wish to update.
2. **Please close Razer Synapse before proceeding.**
3. Plug your Blade into external power and ensure your system is charging.
 - If system battery is under 50%, the firmware update will not be allowed to proceed without external power being connected and the update button will be disabled.
4. Open the updater and double click on the file to begin the update process
5. There will be a reminder prompt to close Synapse and all non-essential applications before proceeding with the update.

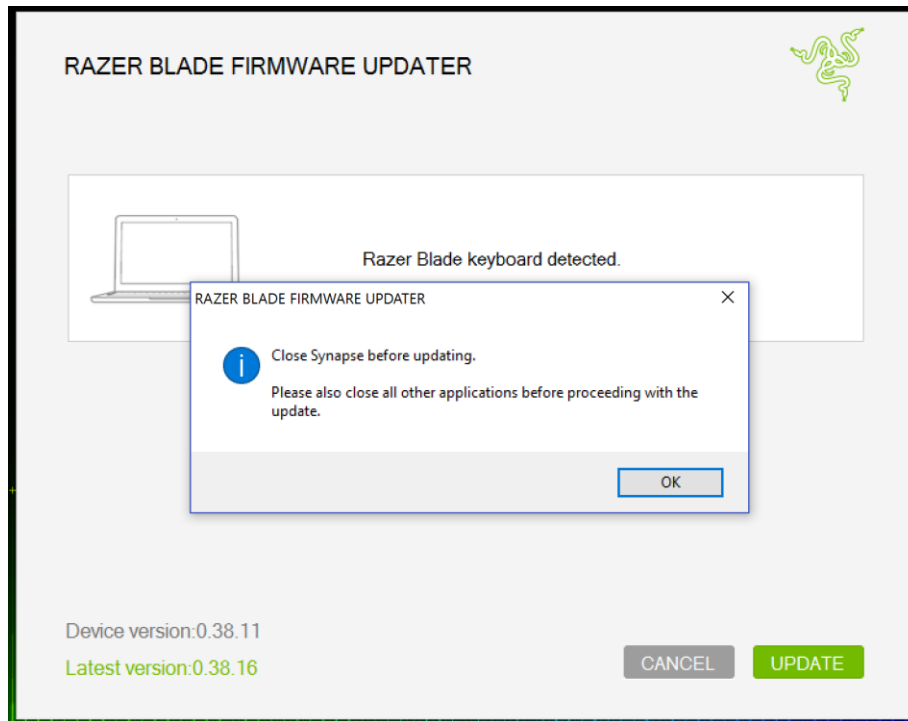


6. Press OK to continue.

7. Observe the Device's firmware version compared to the Updater's firmware version.
- If Updater has newer version, the Update button will be activated. Click the Update button to proceed with update.
 - Please note: If the Updater firmware version is the same or lower than system's, the Update button will not be activated and there is no need for this update.

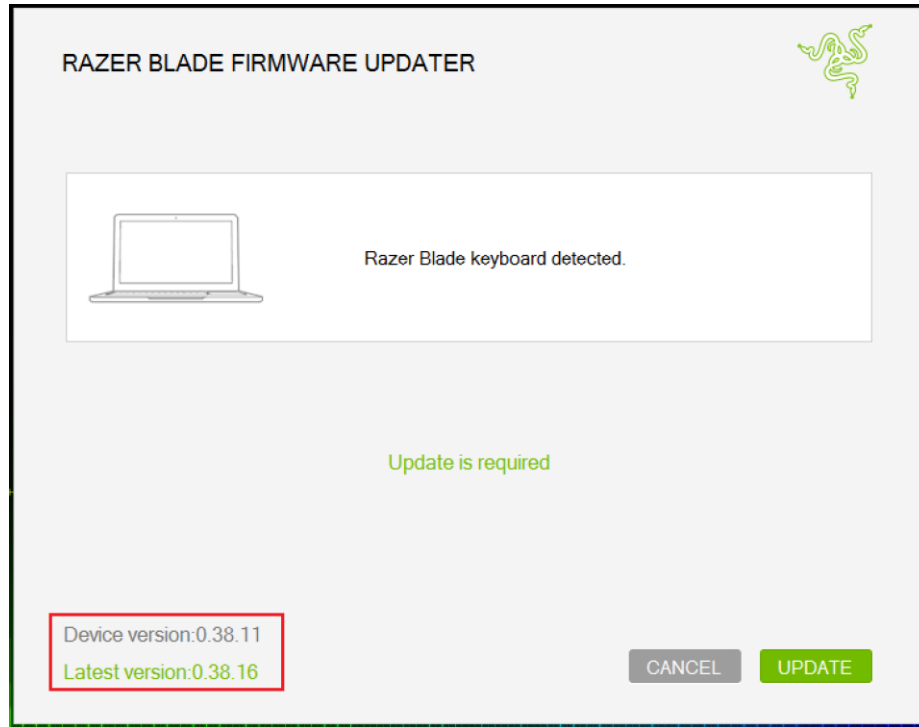


8. After clicking the Update button, the update process will start. The screen pops shown below will show the process of **Erasing, Updating** and then **Verifying** the install process.


Erasing

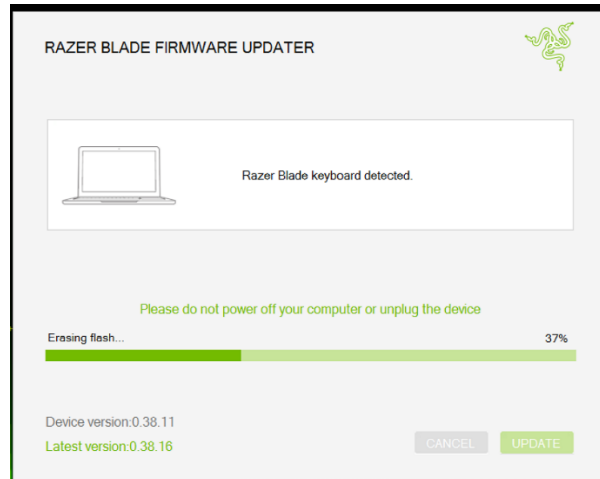


Updating

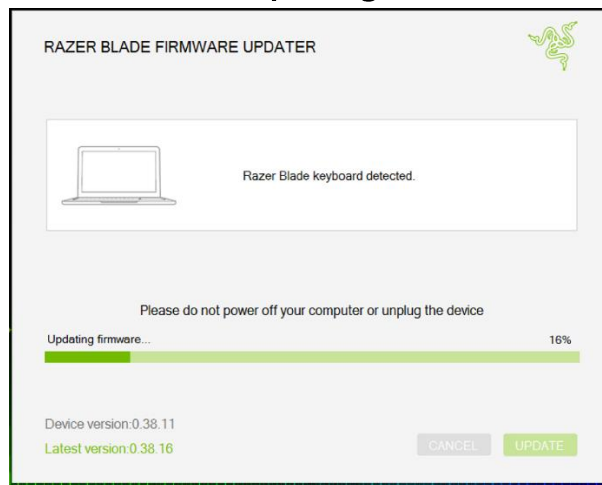

Verifying

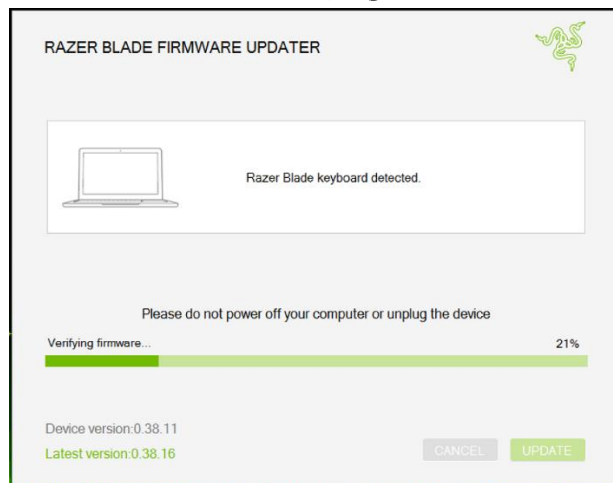

9. The Updater window may flash a few times. Once the update is completed you will see the following message indicating your update has been completed and you are now running the latest firmware.

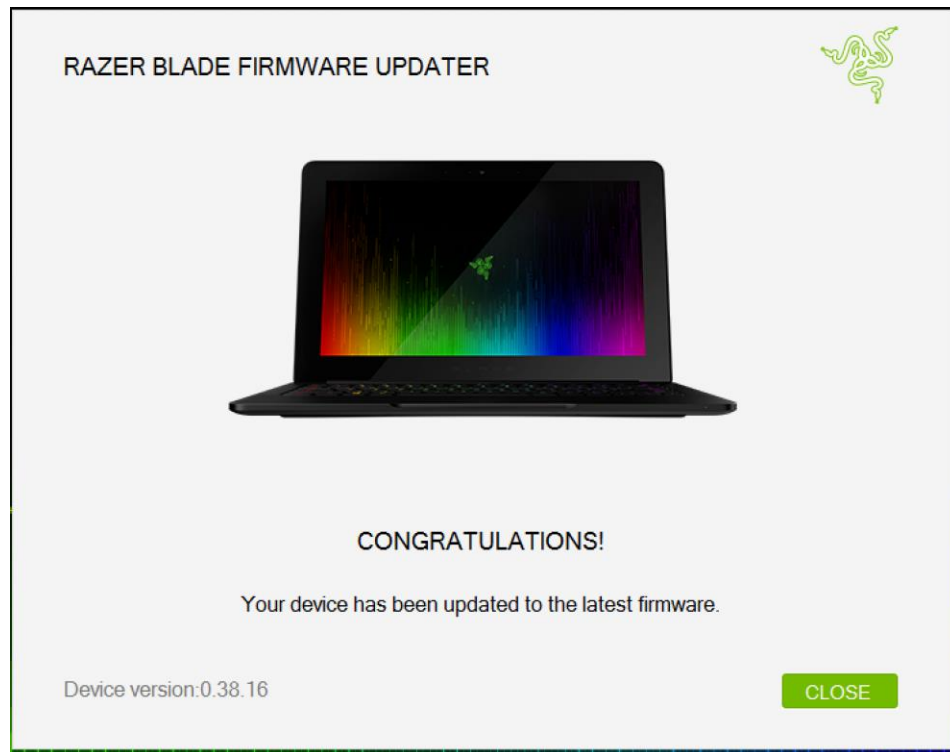

END