




DESIGNED FOR
Safe And Fun



INSTRUCCION

ORGBW | C3 ROCK LIGHT



Before You Read

Thanks for purchasing our
C3 RGBW LED Rock Lights



Please read the instruction completely and make sure
you have full understanding of this product before use

CONTENTS



Accessory	01
C3 Installation Steps	02
C3 Wiring Diagram	02
Installation Diagram	03
Control Box	03
Technology Parameter	04
Pairing Steps	04
APP Introduction	05
Guide Page	05
Home Page	07
Music Page	08
DIY Page	09
Settings Page	10
Modify Name Page	11
Group Page	11
Detection Page	11
Single Set Control	12
Multi Sets Control	12
Bluetooth Problem	13
Customer Questions & Answers	13
Download APP	14




Accessory

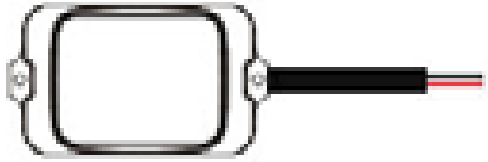C3 RGBW LED Rock Lights			
Accessories	4 Pods	8 Pods	4 Pcs (sell 4 separate light)
	4	8	4
	1	1	
	1	1	
	2	4	2
 Flat	4	8	4


C3 Installation Steps

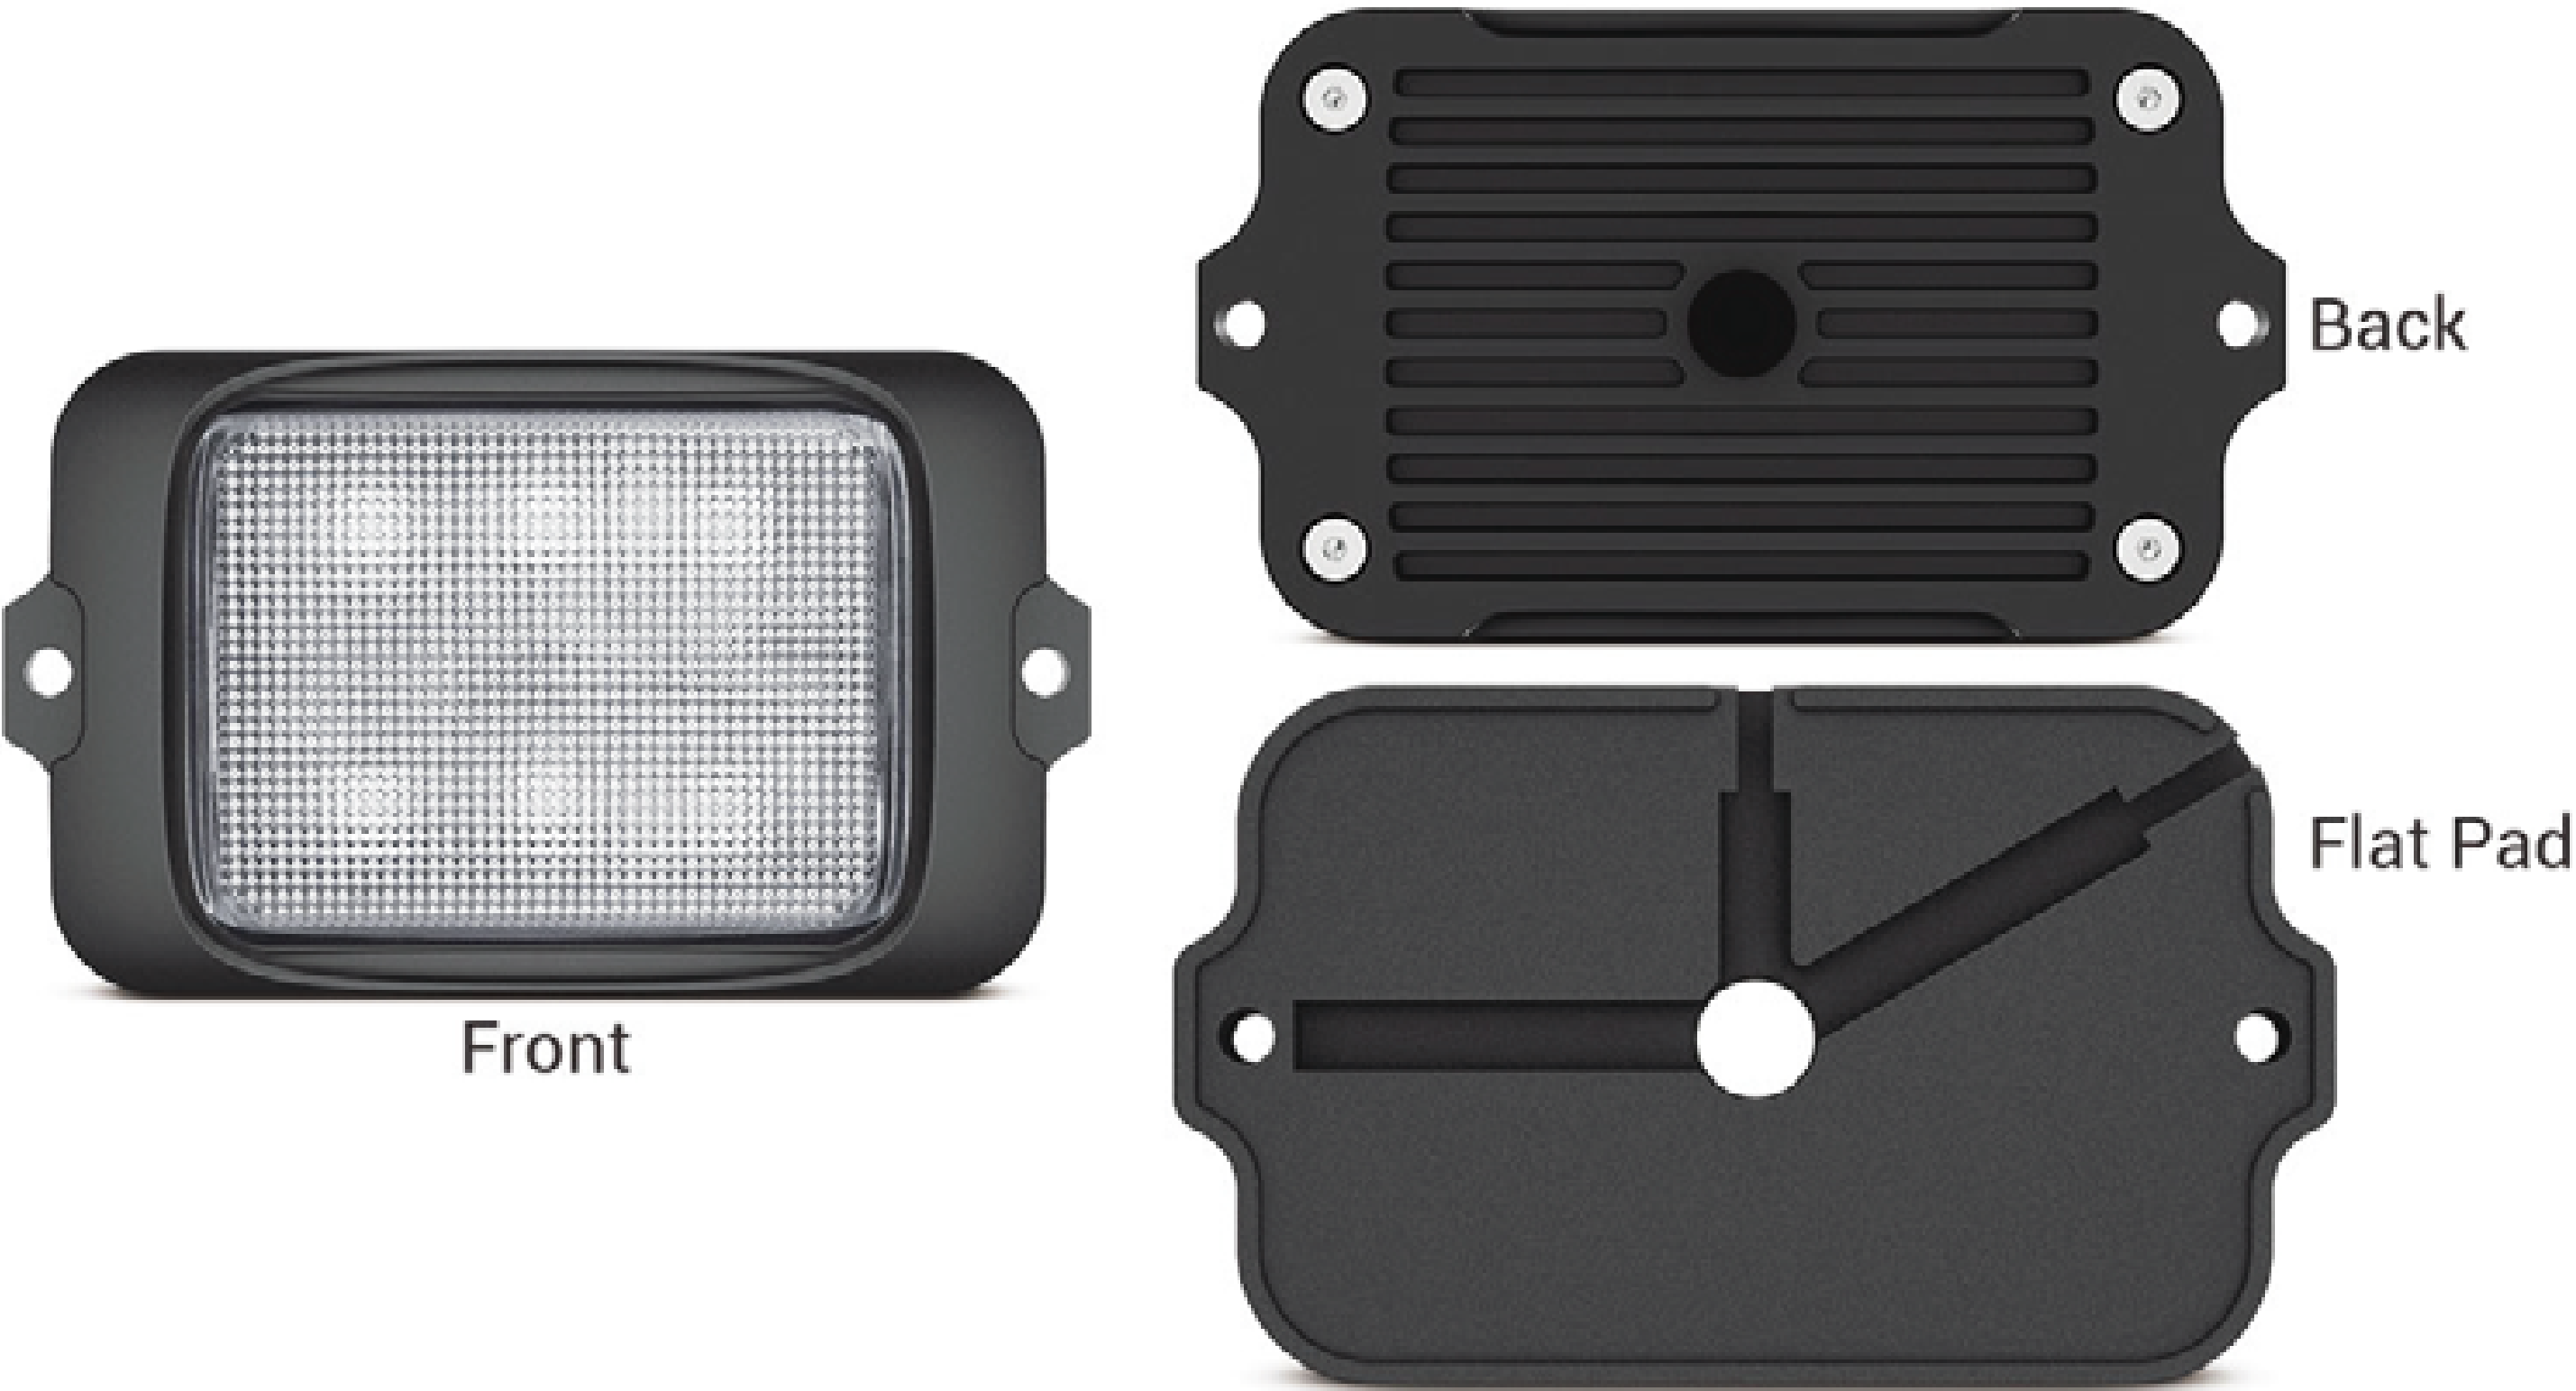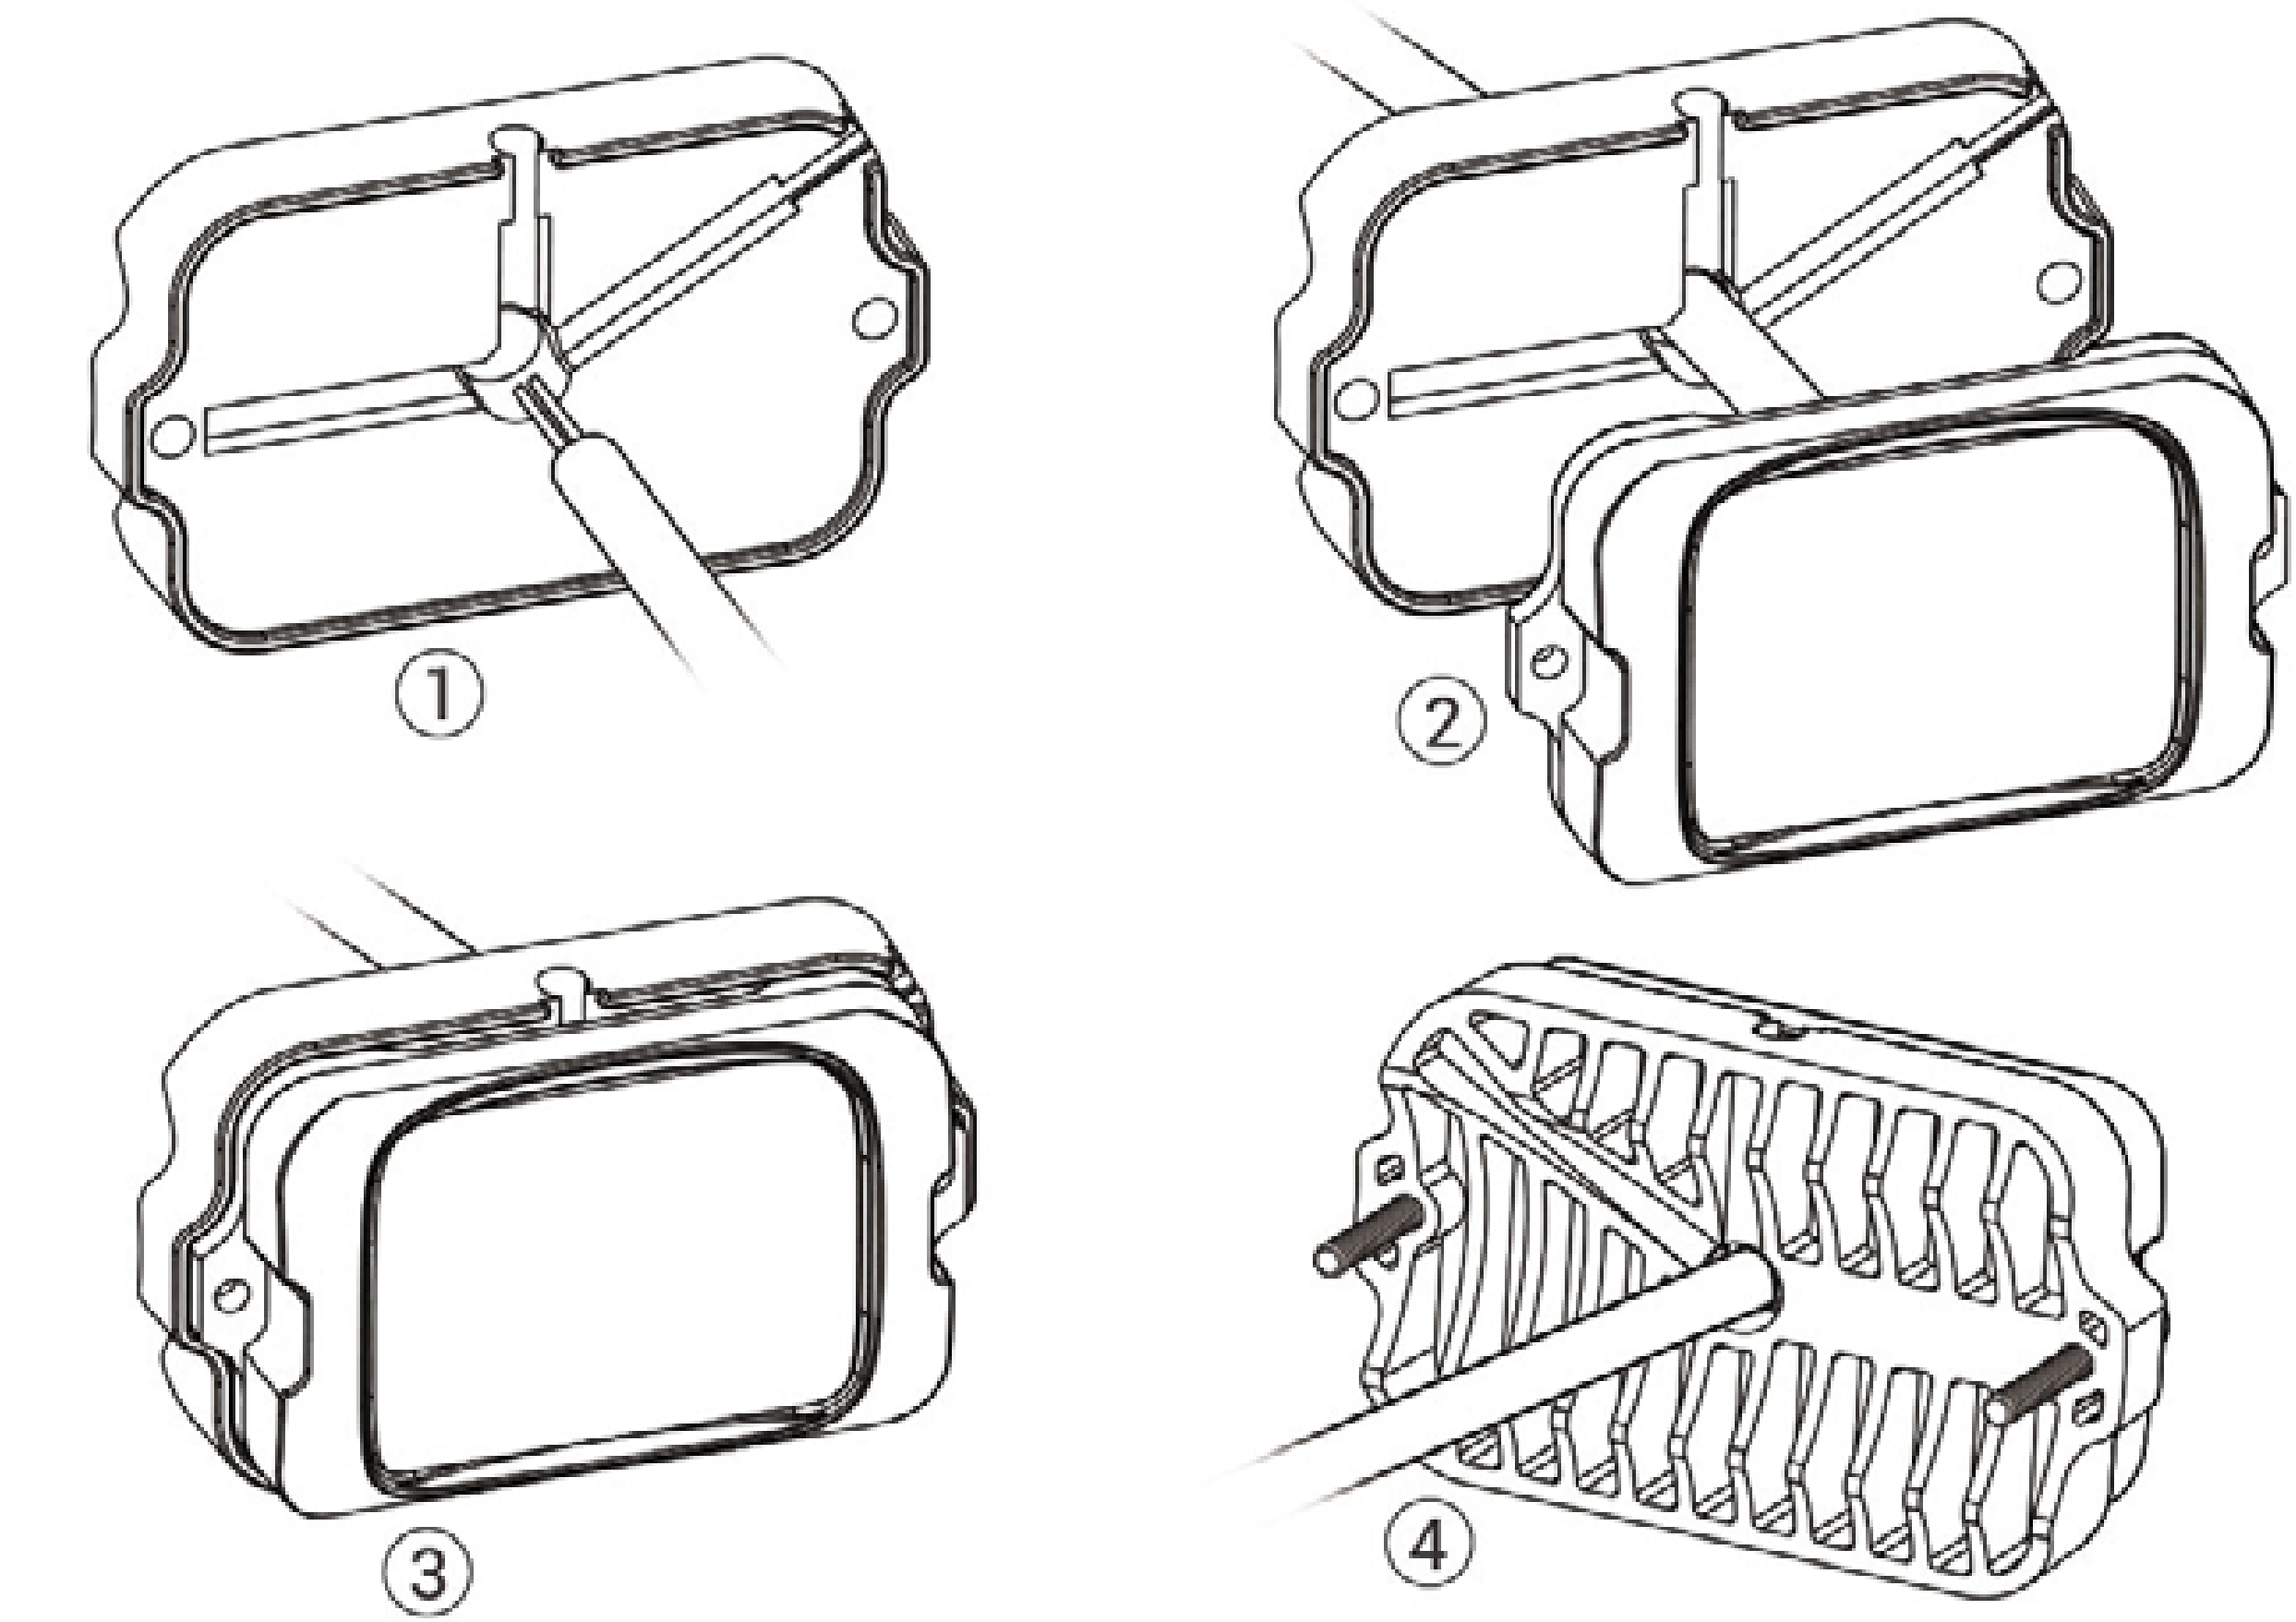


C3 Wiring Diagram

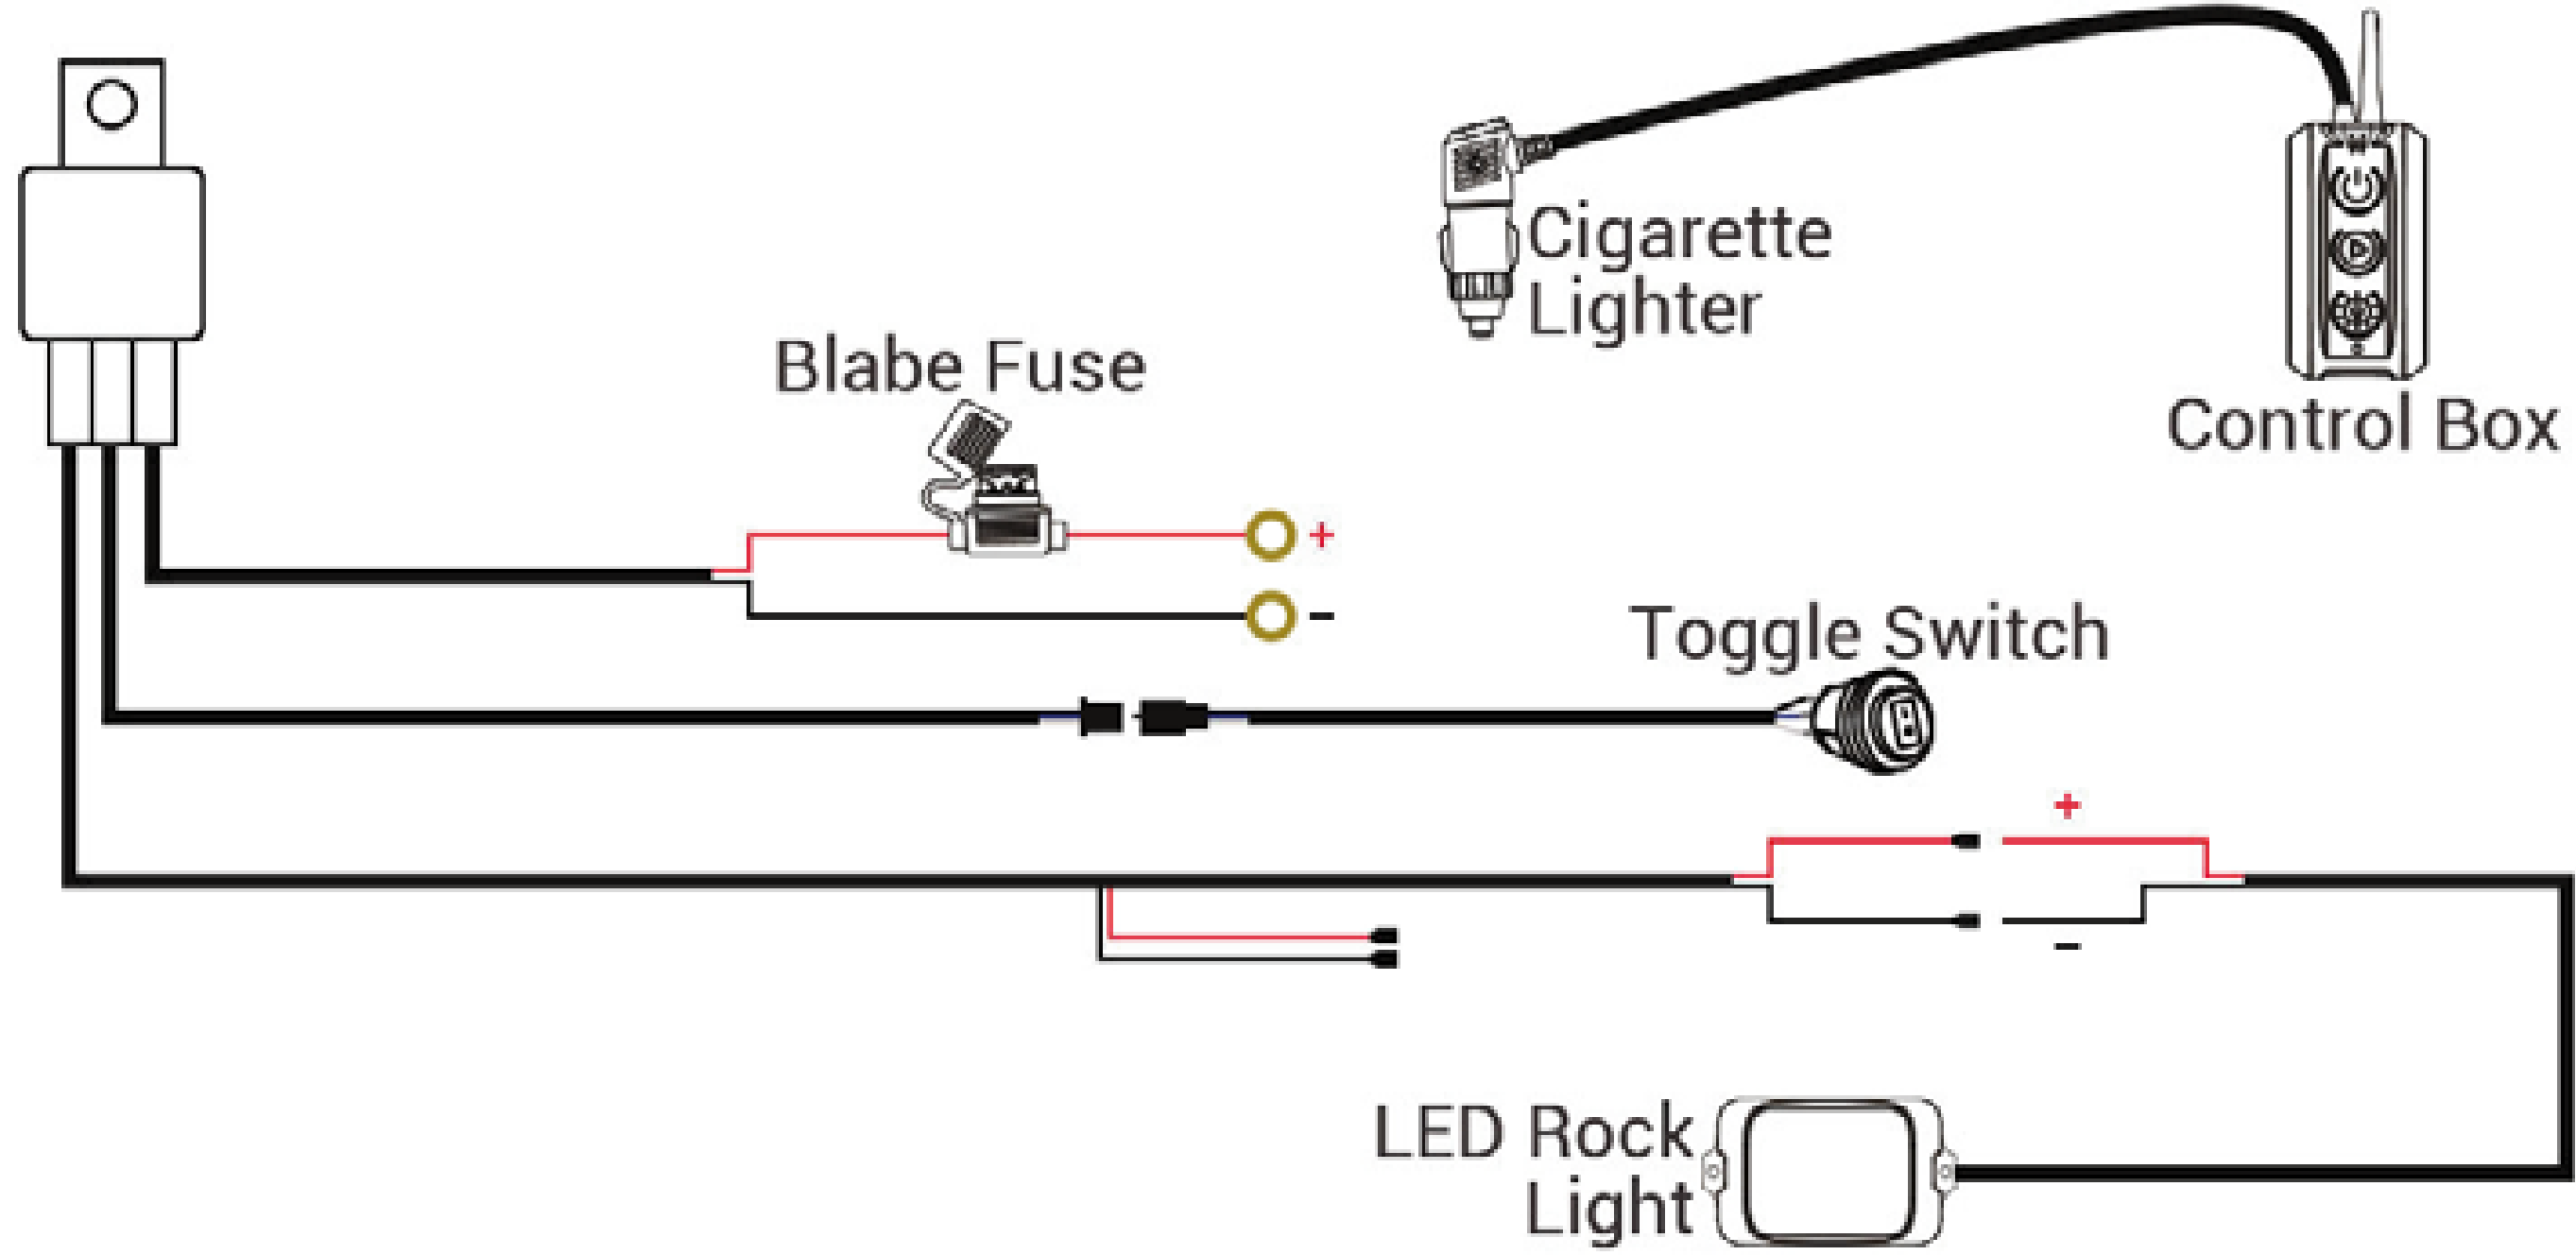

Installation Diagram

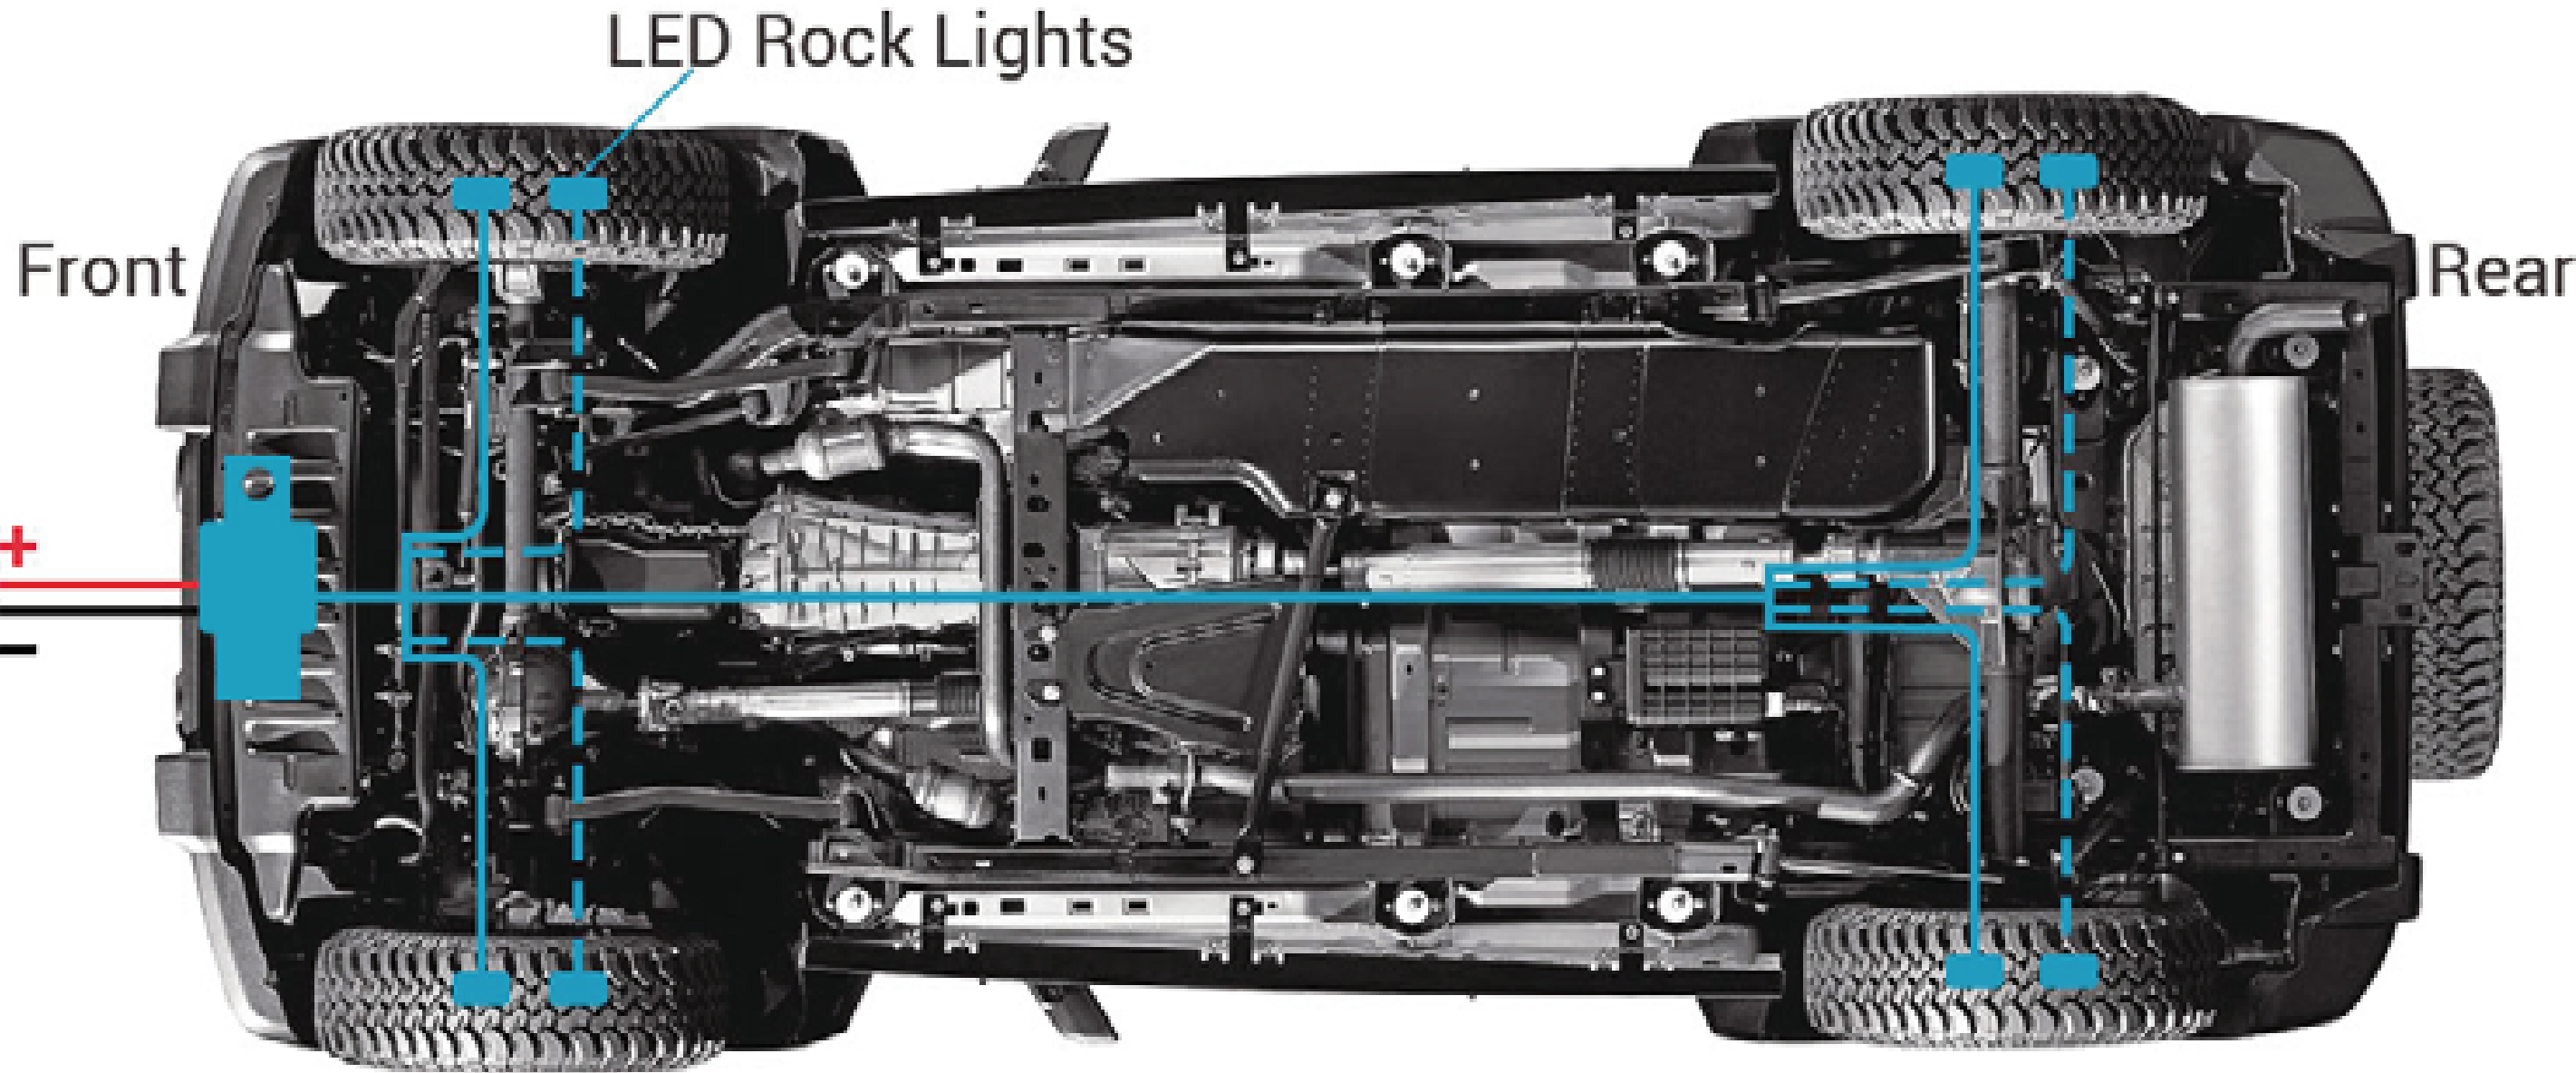

Control Box

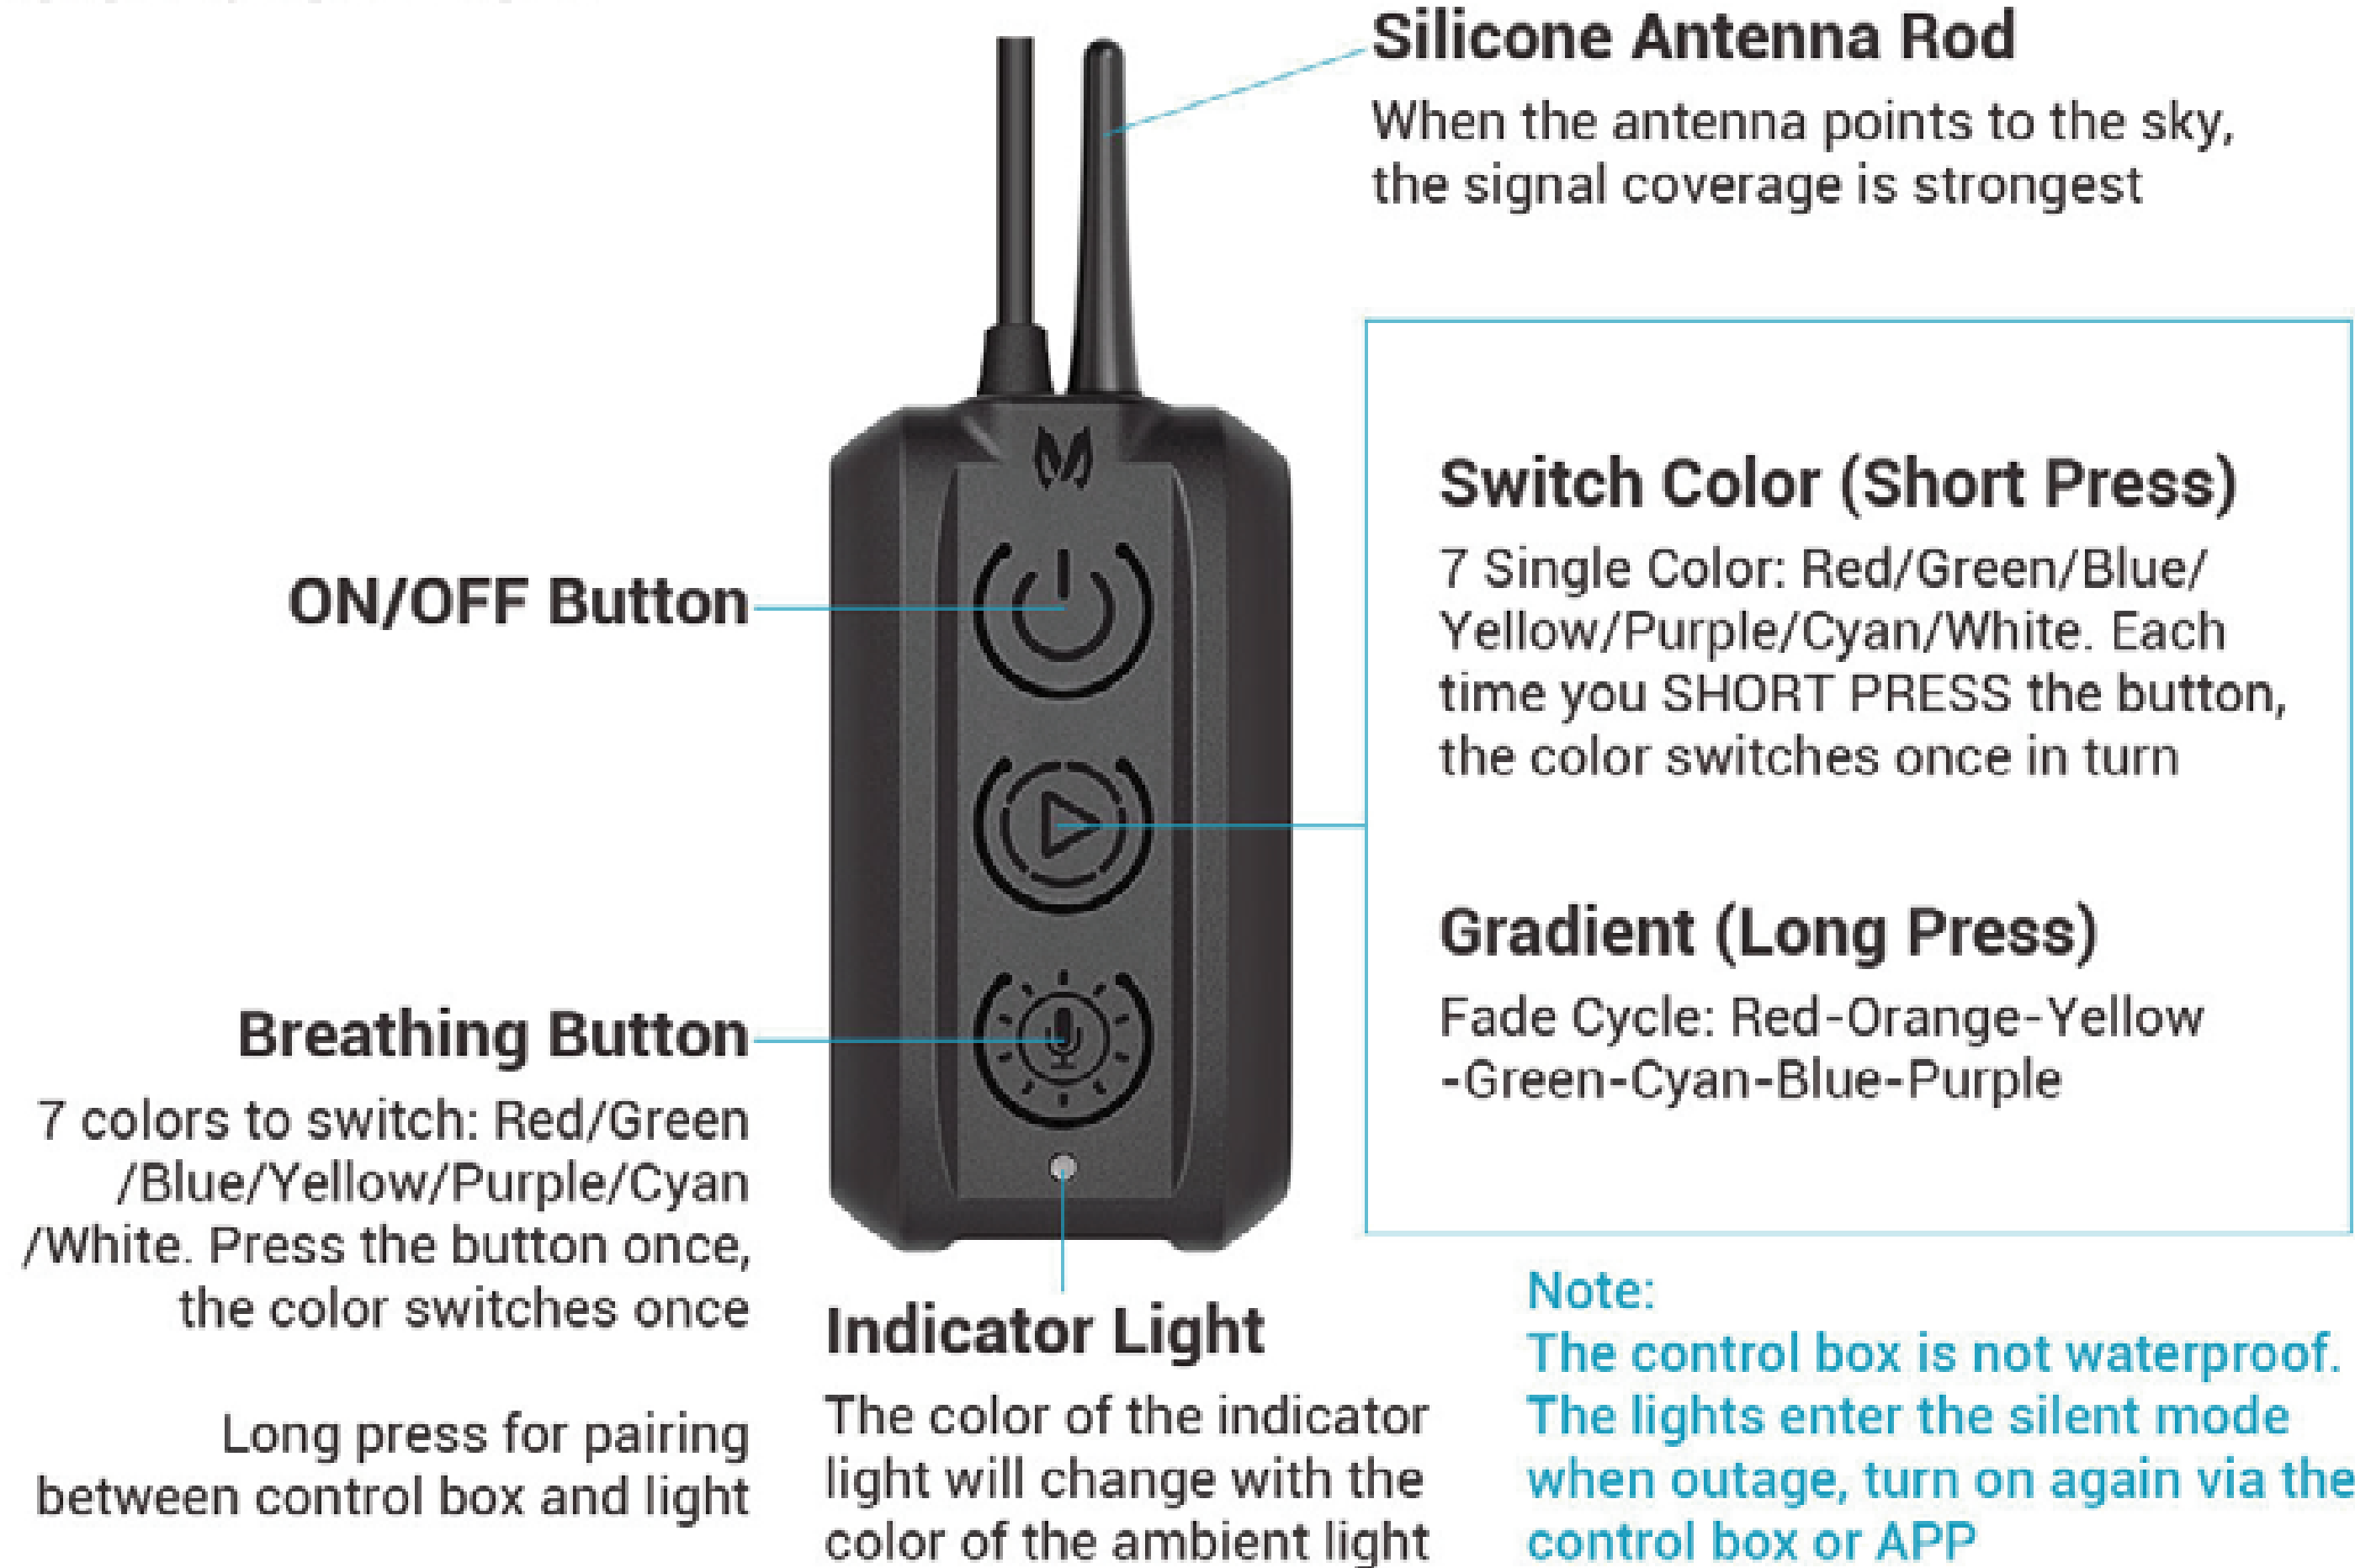

Technology Parameter

	4 Pods	8 Pods
Input Voltage	DC10-30V	
Output Power	20W (max)	40W (max)
Control Mode	APP + Control Box	
Total Brightness Level	8 Grade	
Operating Temperature	-20 °C — 50 °C	
IP Grade	IP68	
Color	Black / White	

The Pairing Way For Added Rock Lights:

1. Turn on the wire harness switch three times repeatedly (each interval shall not exceed 5 seconds), wait for the LED light to flash to enter the pairing mode.
2. Long press the Breathing Button of control box for five seconds to connect. When the indicator light is steady on, the pairing is successful.

Note: The above operations are suitable for adding new rock lights.

APP Introduction

The MICTUNING APP supports BLE and SPP Bluetooth protocols. By connecting Bluetooth, you can easily control and customize mictuning's Smart LED Lighting products. Feature with RGBW multi-colors, create amazing atmosphere. Perfect for automotive and other uses.



START ON

MICTUNING APP with multiple lighting modes including single color, jump, fade, music mode and more. DIY the color to fit for special occasions like off-road racing, car party and so on.

■ Guide Page



Back ←



Click on the poster will jump to the product page



Click to jump to the official website



Contact Pop-up (Click on the social icon to go to the corresponding social software to contact)




■ Home Page

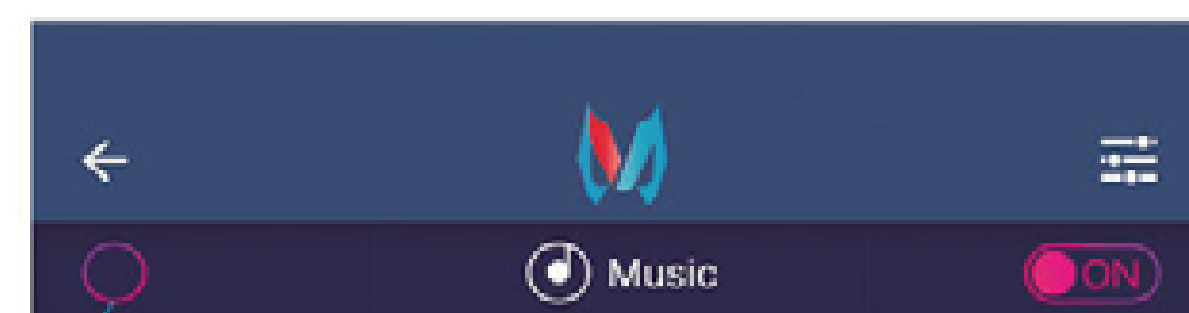
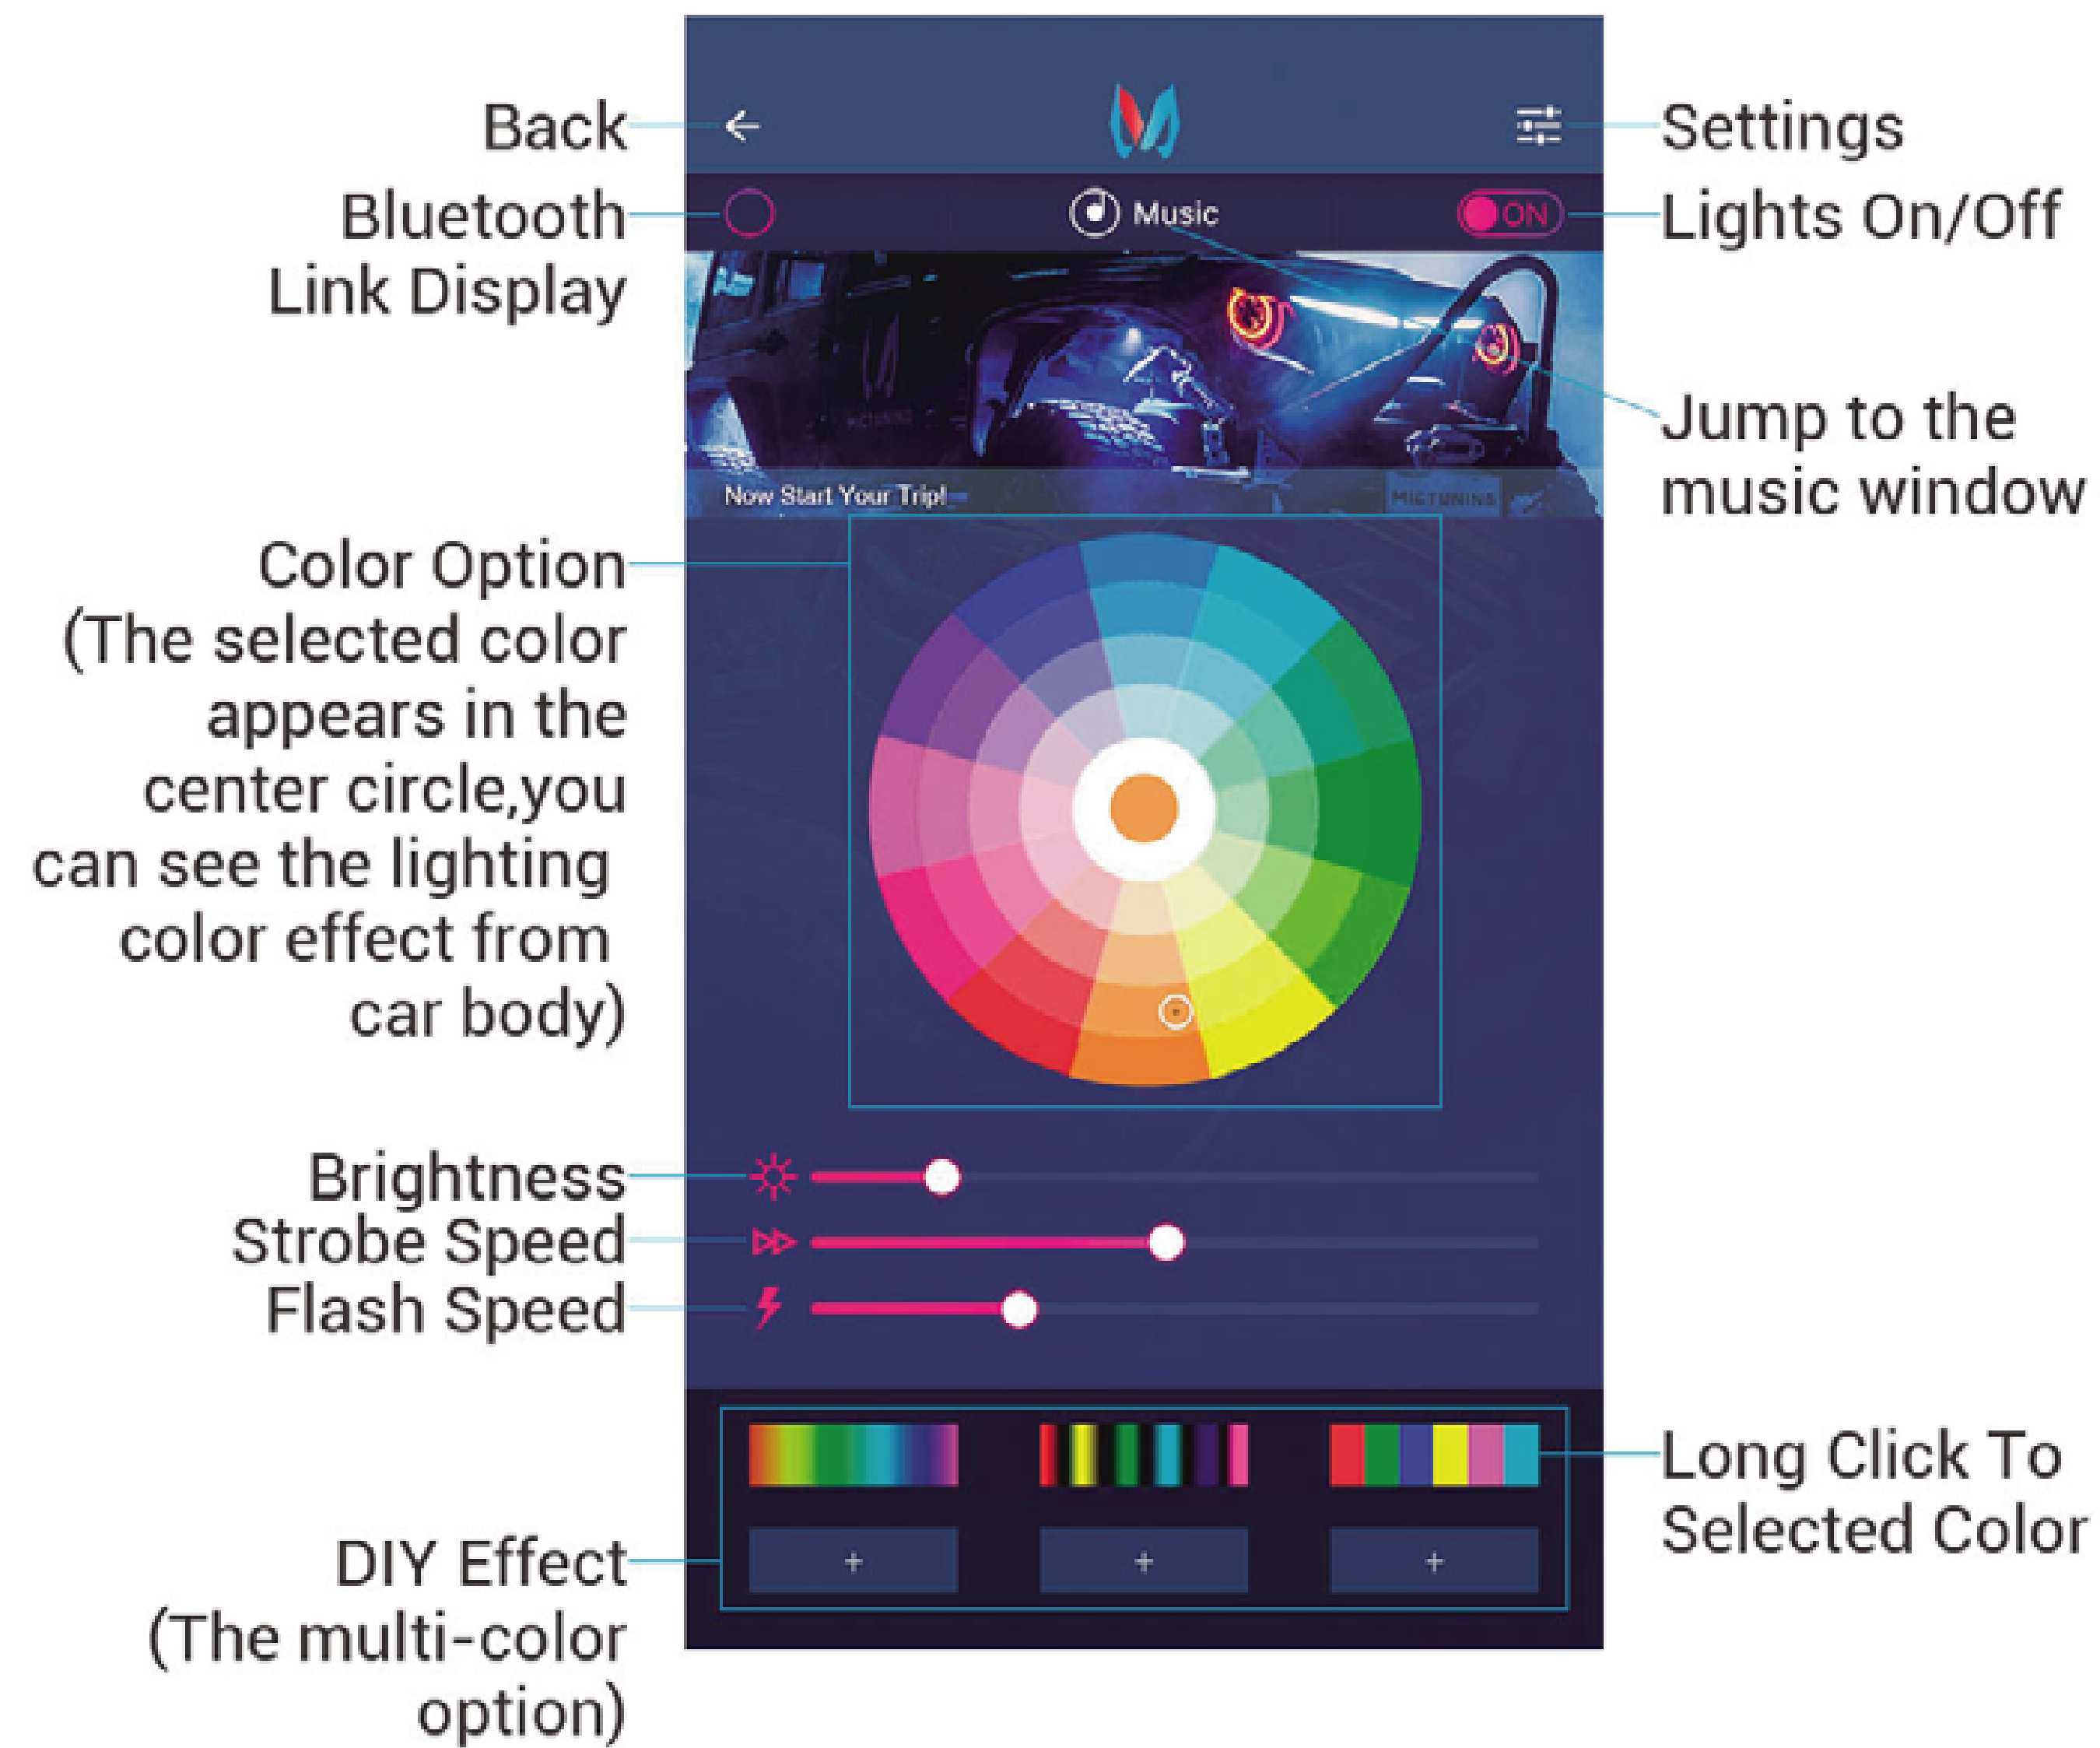


Mictuning will automatically connect when it's turned on, after successful connection at the initial use.


■ Music Page

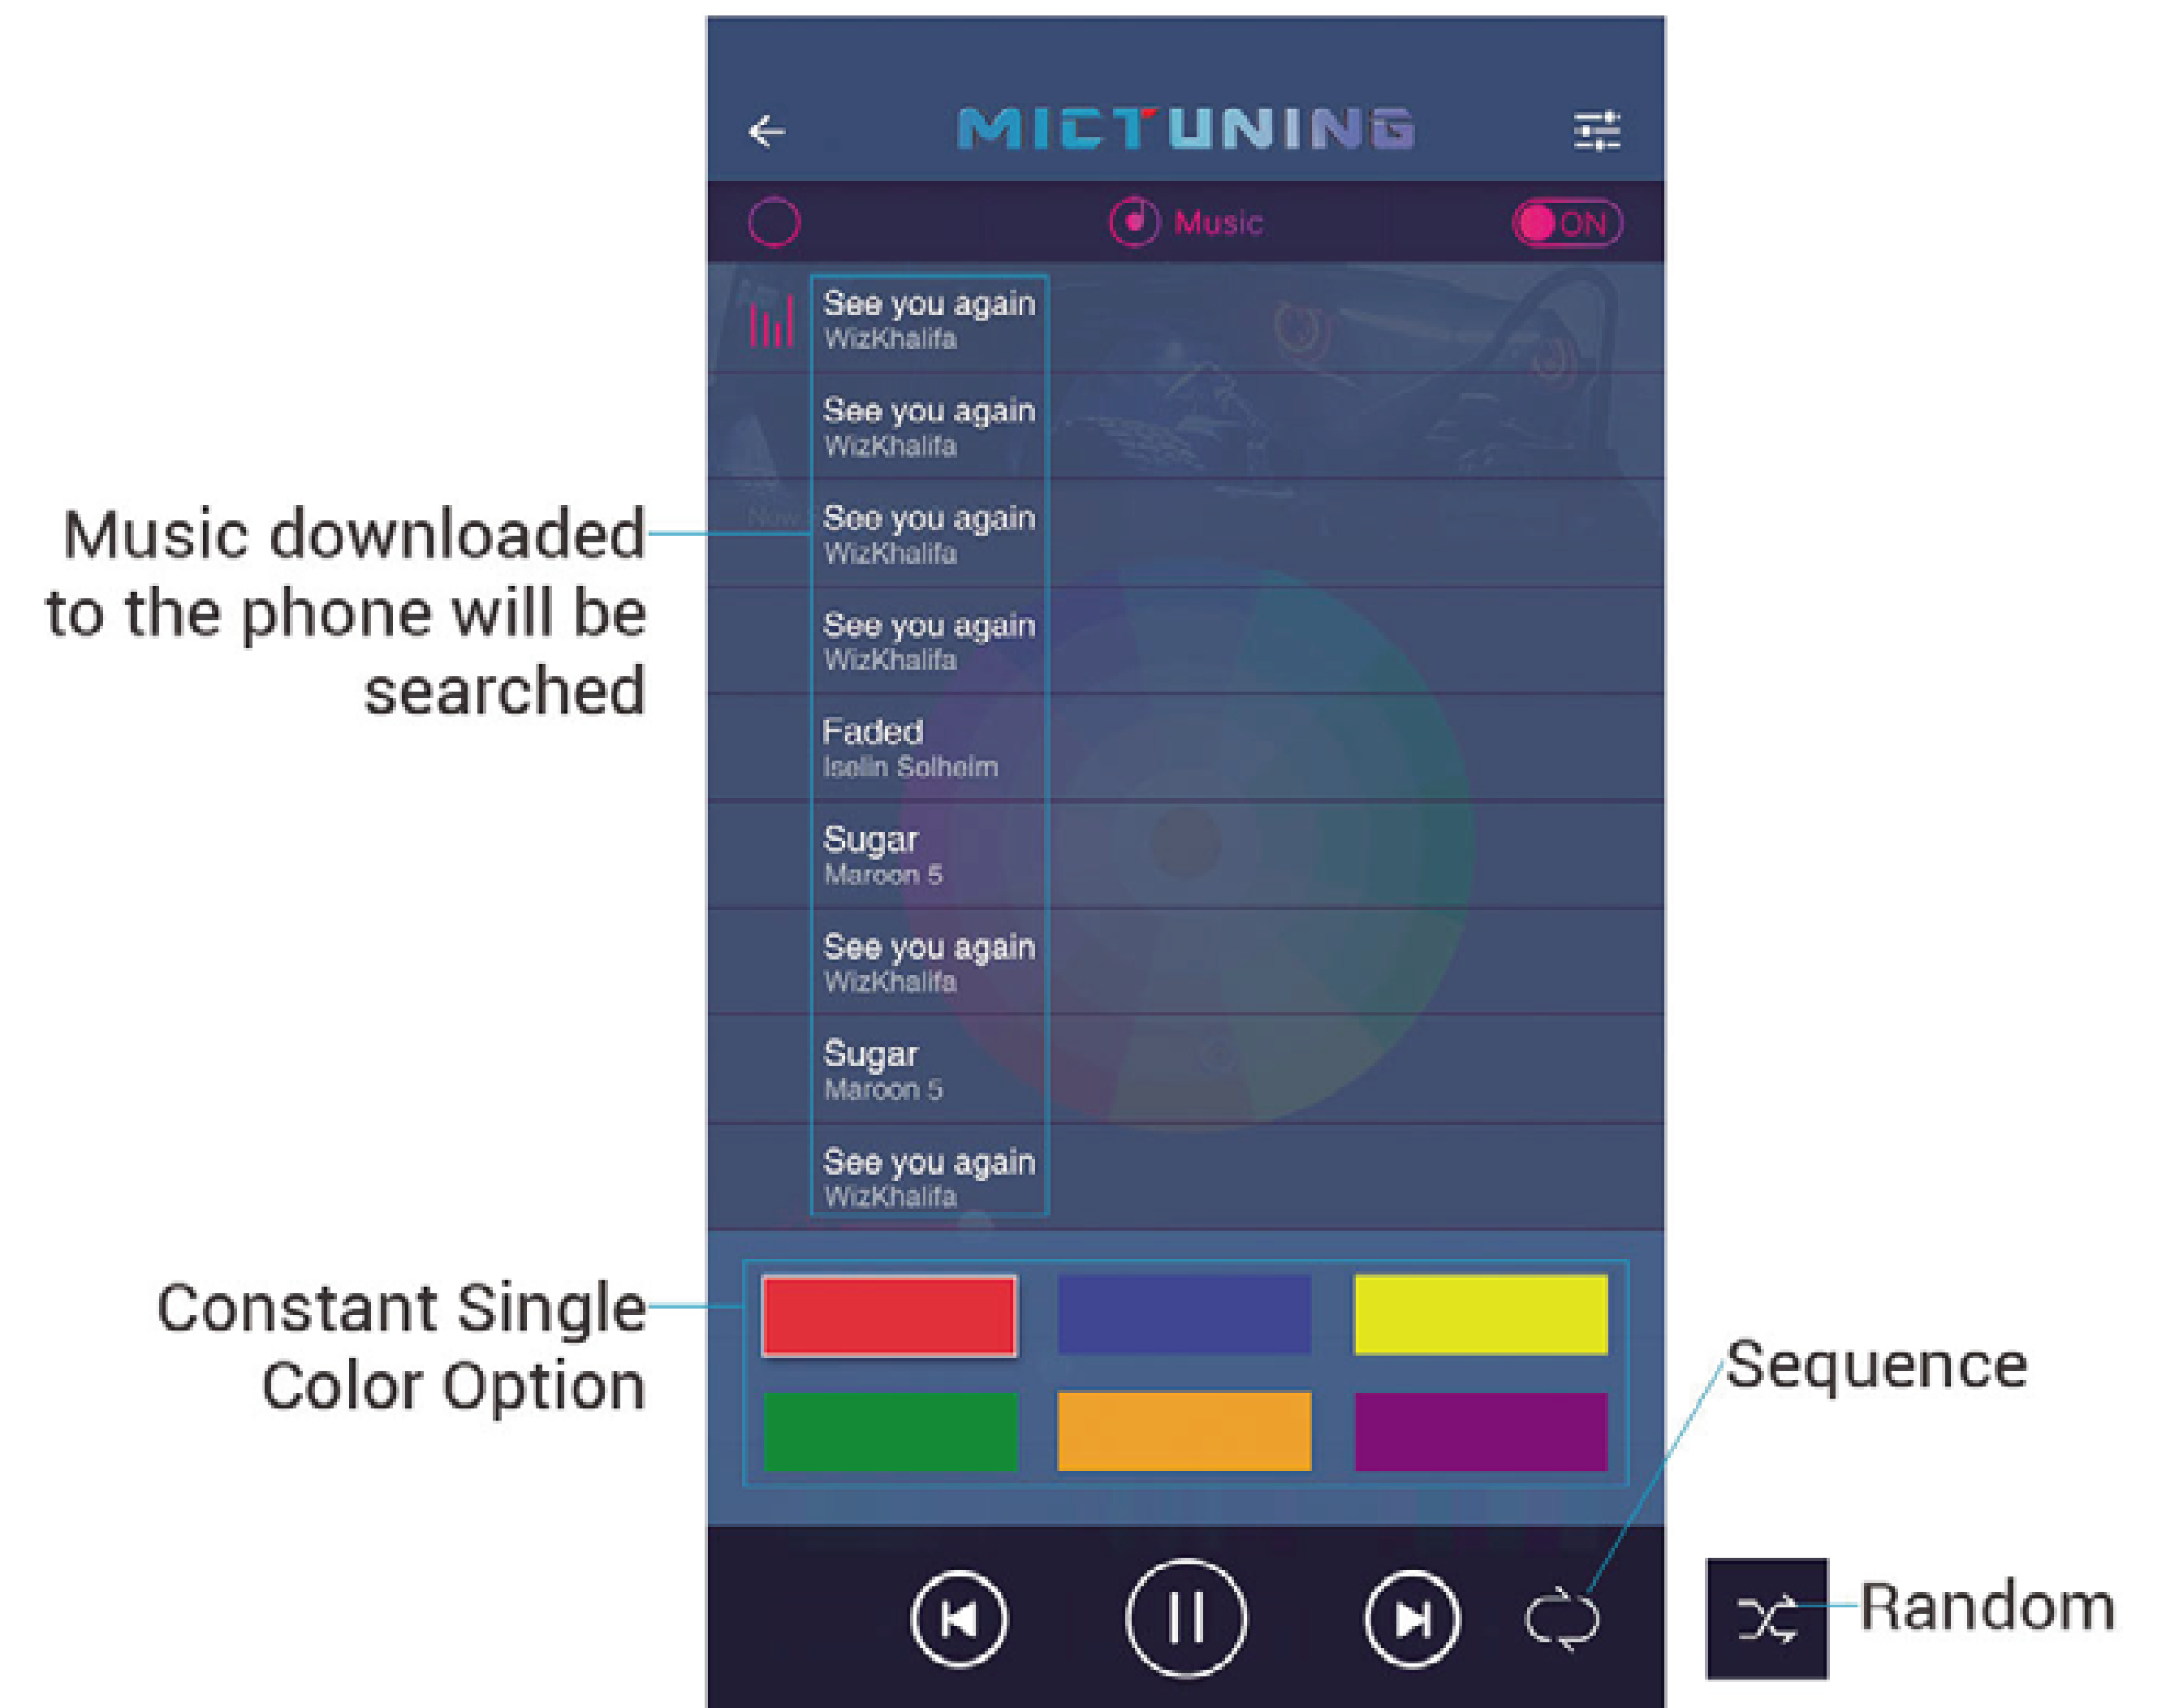


DIY Page

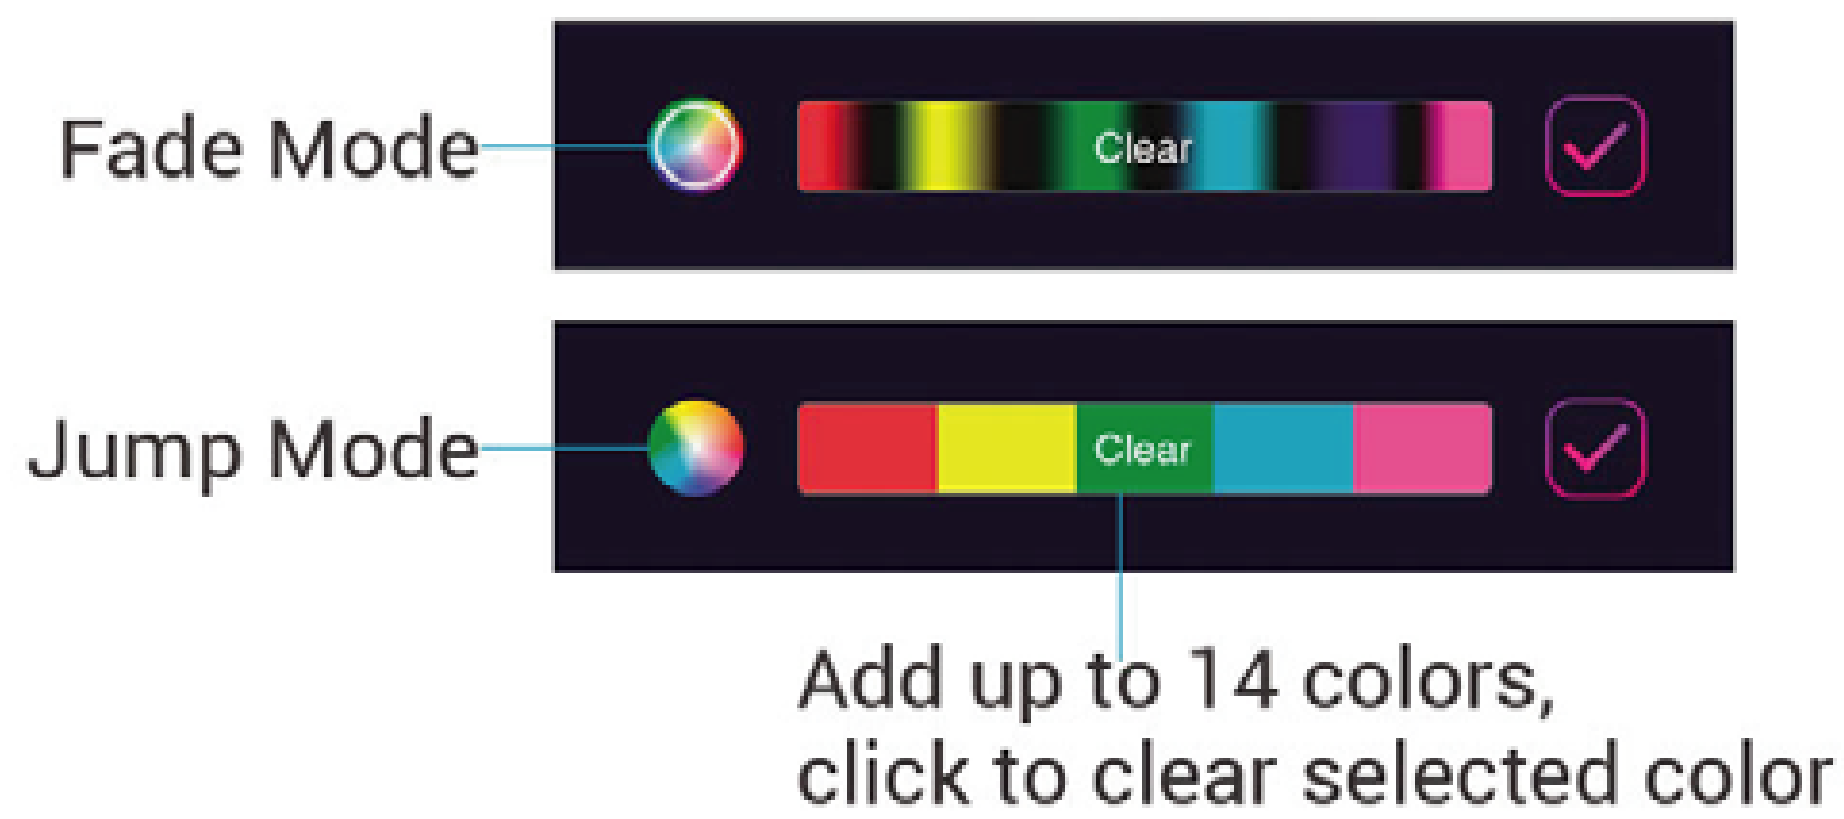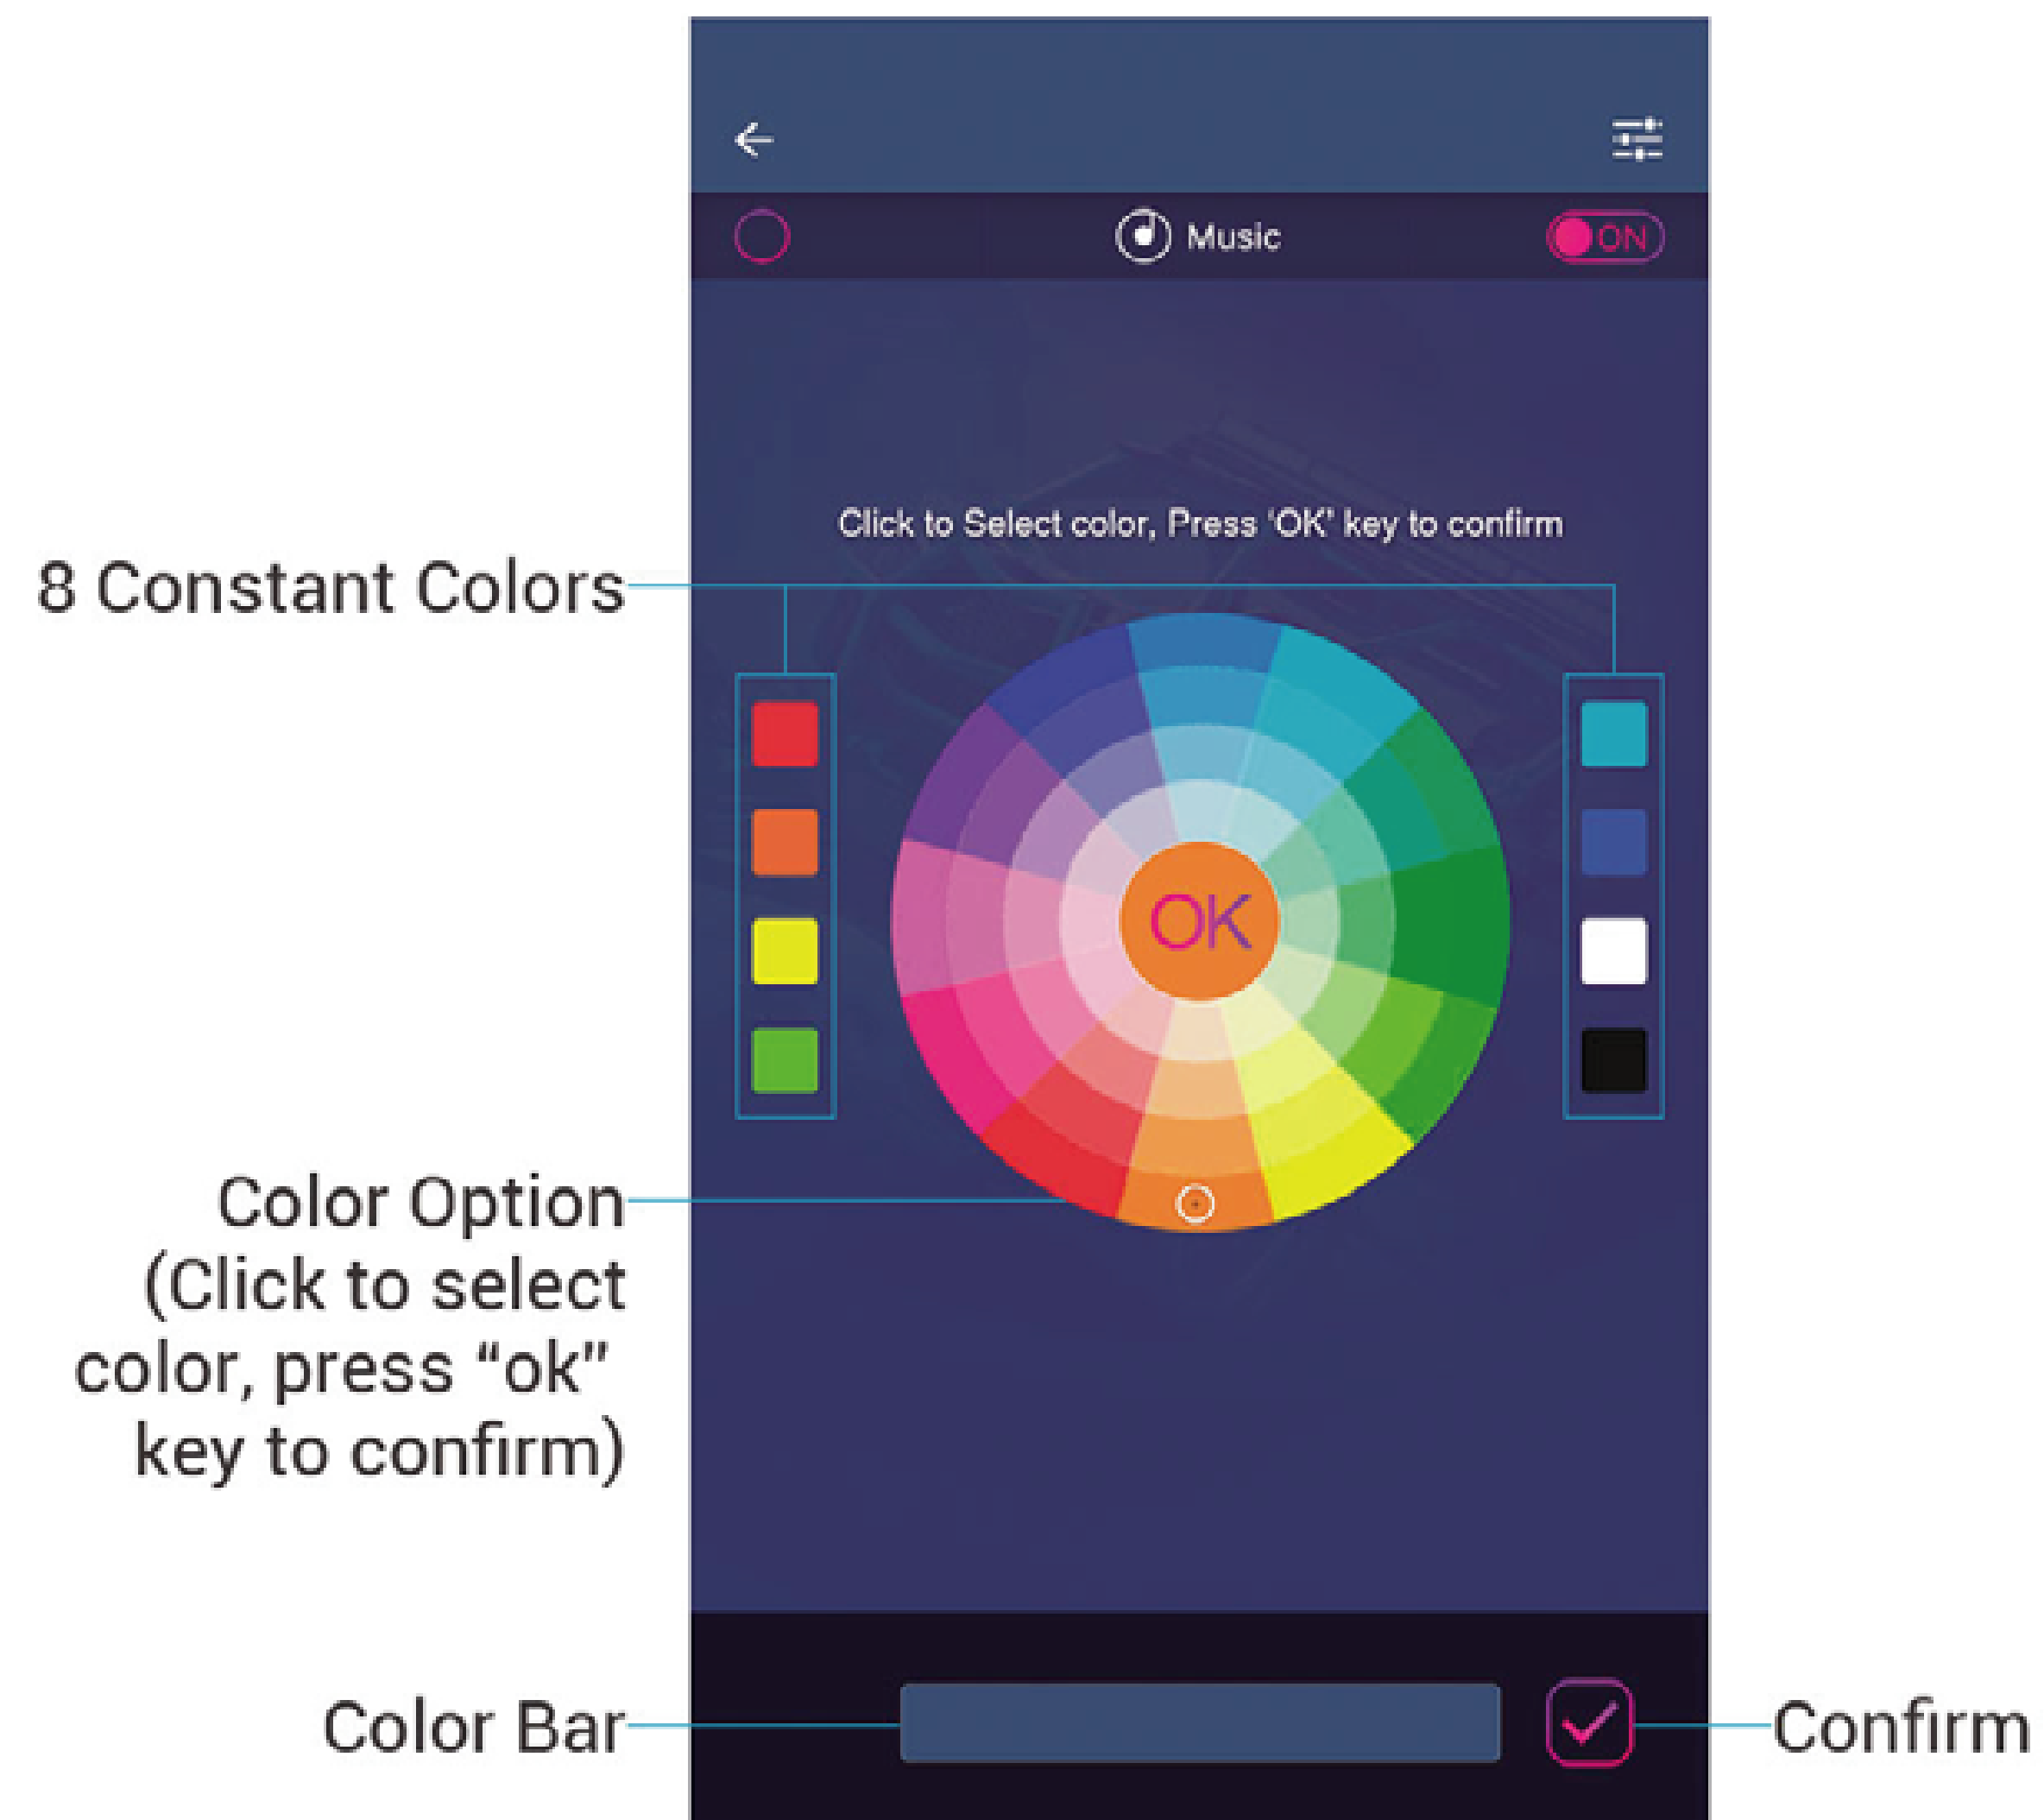

Settings Page

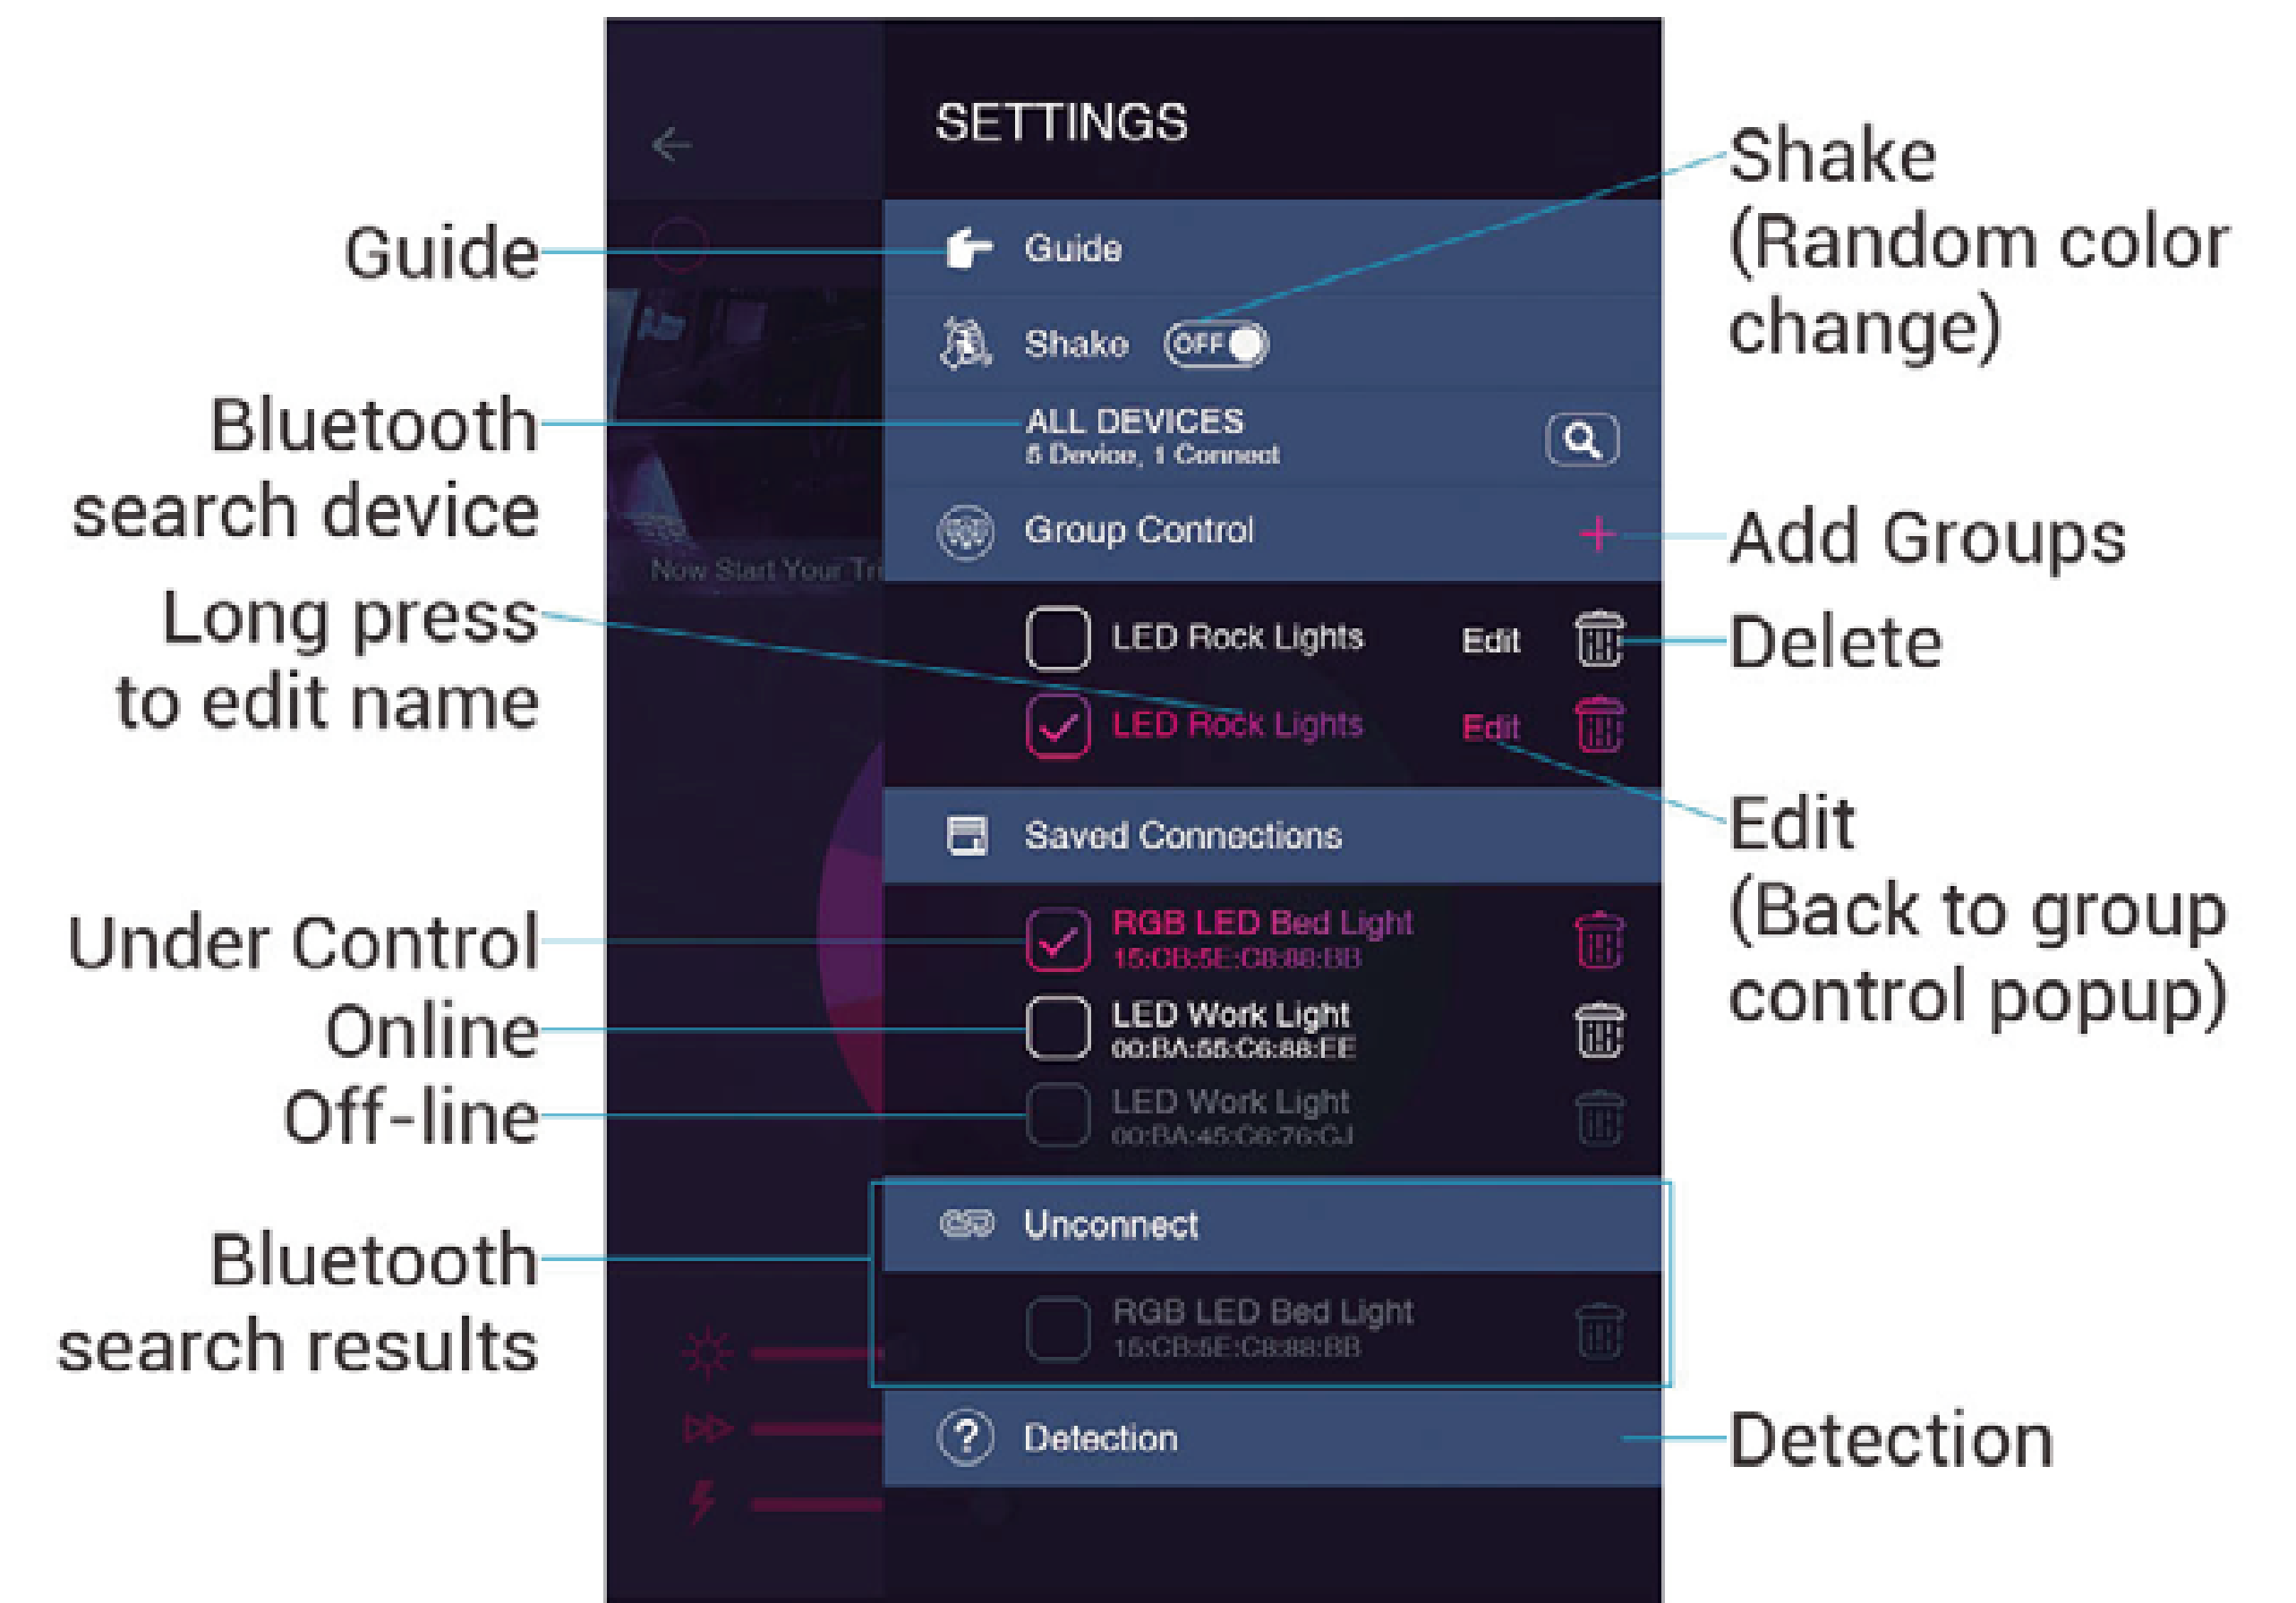


■ Modify Name Page

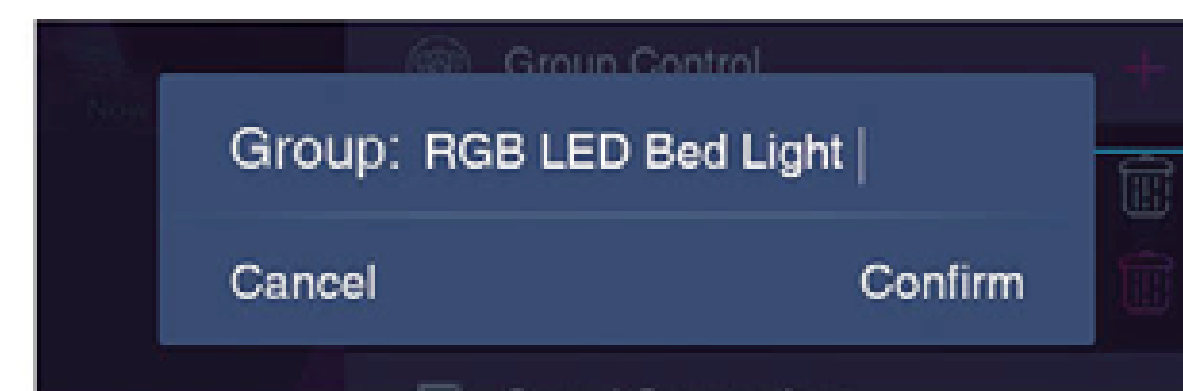


Page of group control modification

■ Group Page

Multiple single selections form a new group

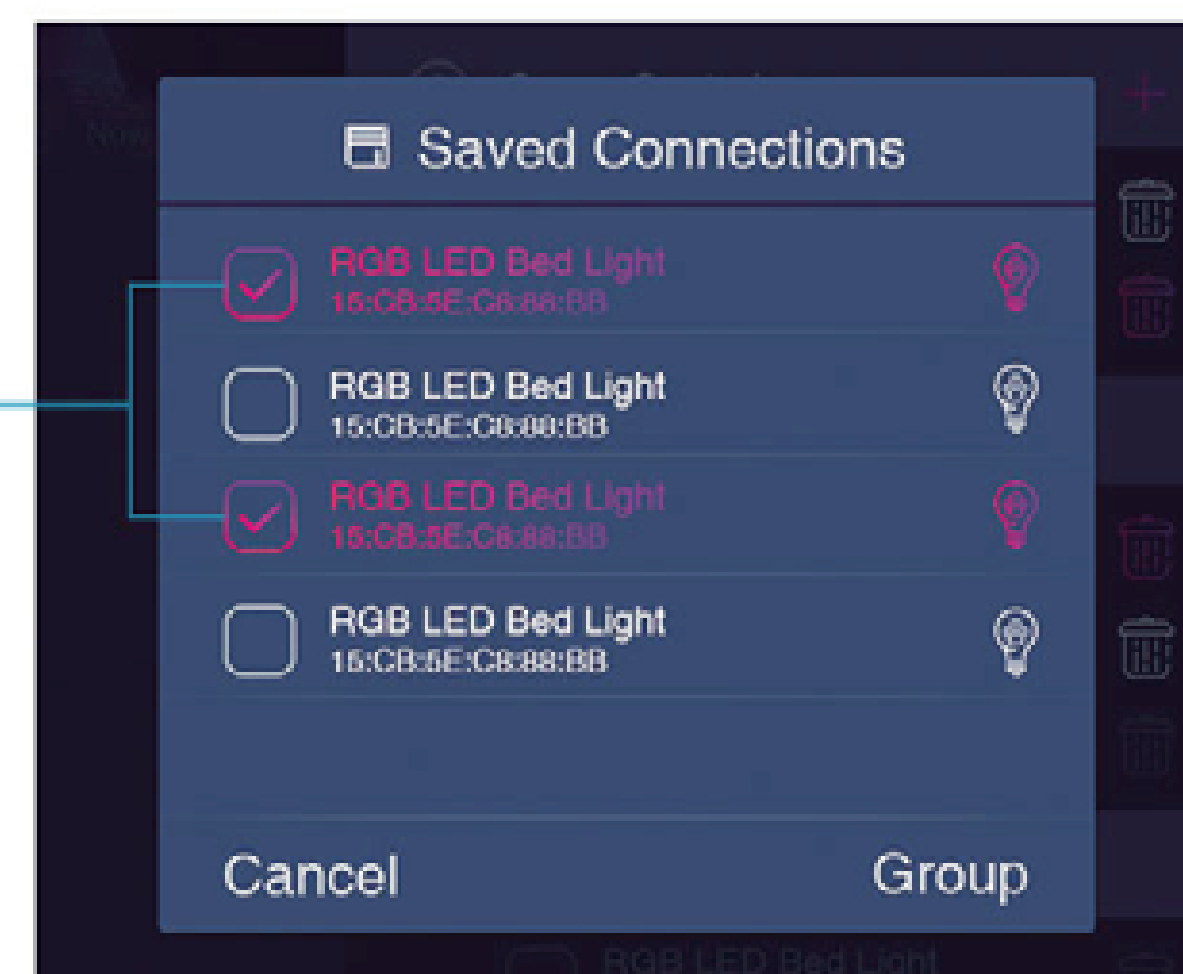


■ Detection Page

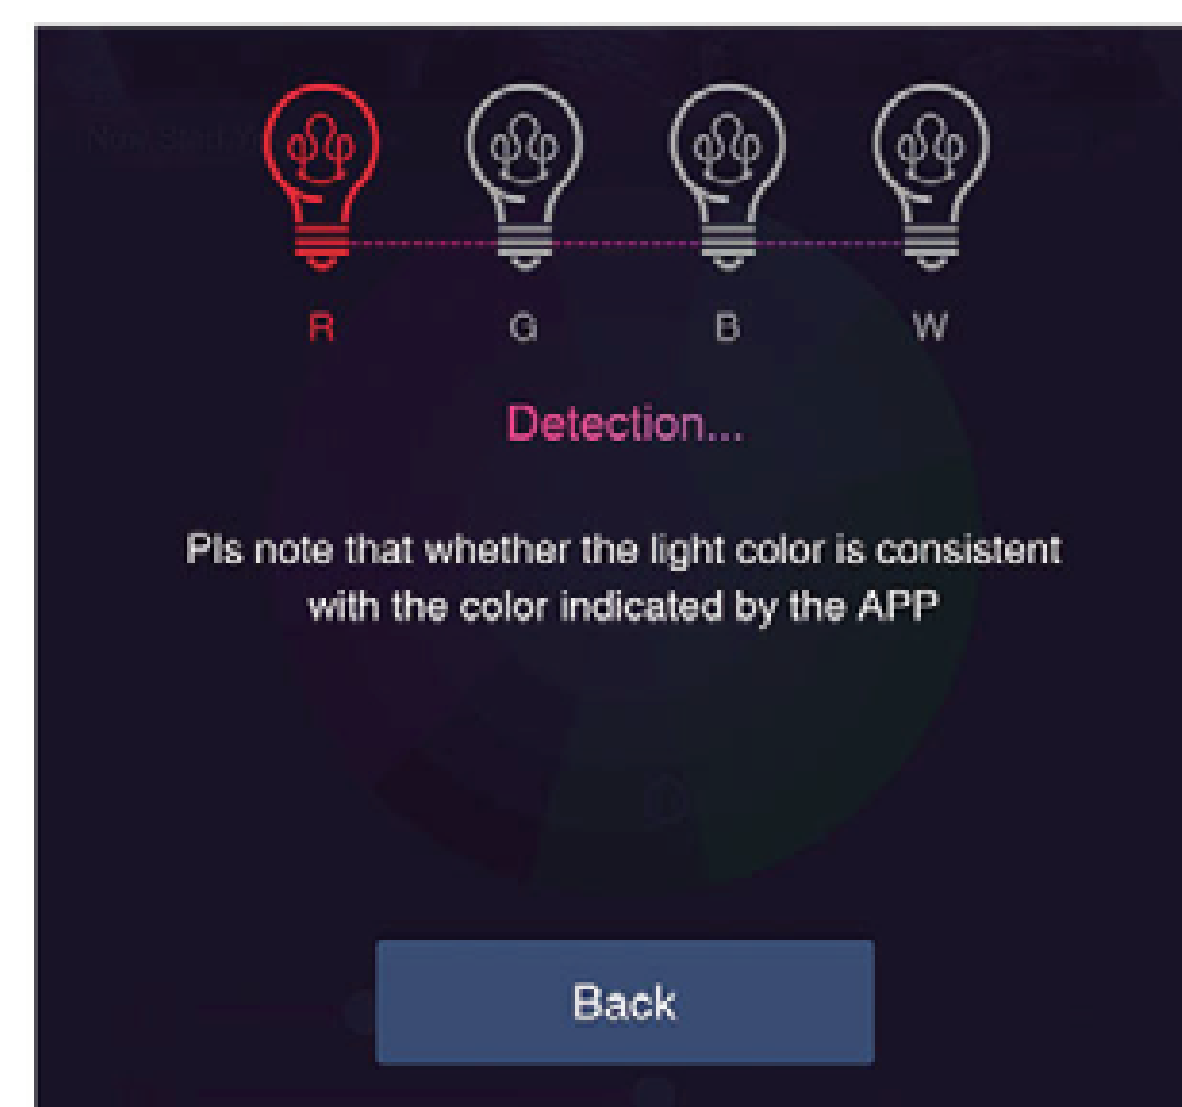

Check whether the RGBW color works normally. The interval between the light on & off is 1s, and it will continue to cycle without exiting the self-detection interface.

Pls note that whether the light color is consistent with the color indicated by the APP when detect.

■ Single Set Control

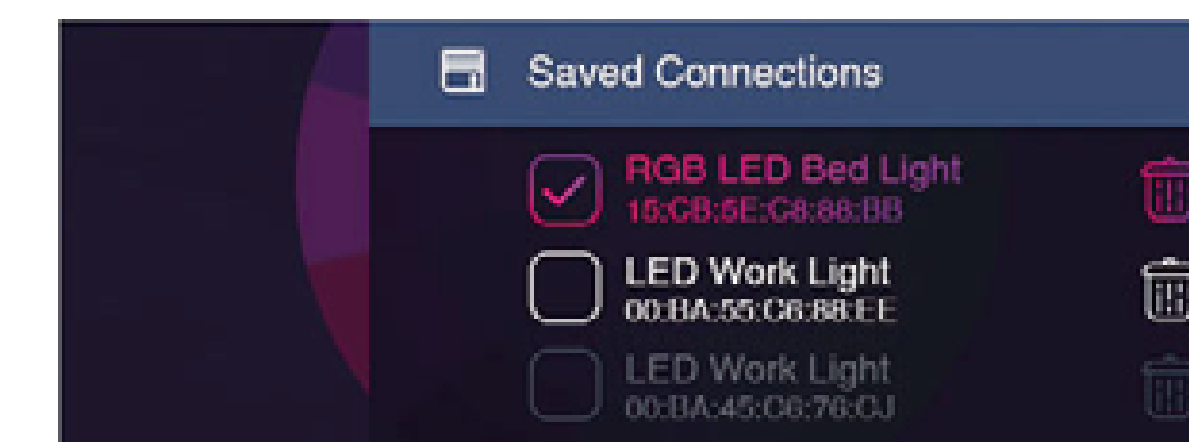


After selecting the light set, go back to home page for single color operation or DIY color effect.



■ Multi Sets Control



Select you wanted devices and then click the group button. Go back to home page for single color operation or DIY color effect.

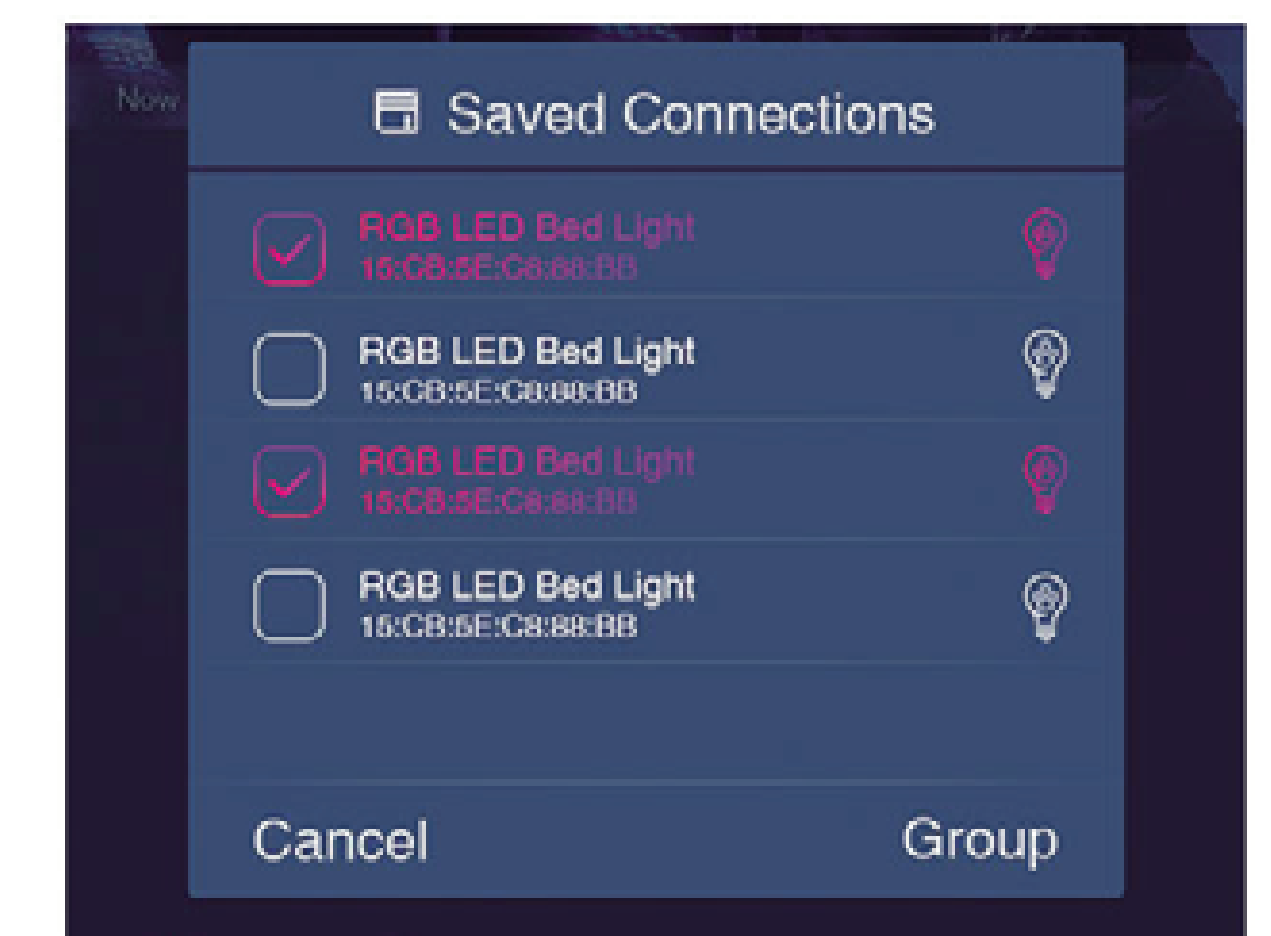

Bluetooth Connection Failure

1. Check whether it is normally powered on
2. Use the control box to check whether the indicator works properly
3. The APP must be authorized, otherwise it cannot be connected
4. Android phones require Bluetooth pairing when it connected to the device for the first time in APP

Customer Questions & Answers

What is the maximum distance between the lights and the control box to maintain a normal connection?

The control box controls the LED rock lights by radio. Since the radio signals are easily shielded by metal and earth, the communication distance changes accordingly. In an open environment, the maximum communication distance is 10-20m.

For installation in a complex environment, it is recommended to place the light to the installation position firstly, then power on, and conduct a communication test through the control box to ensure that the control box can control the lights, finally install the lights.

Why the lights are still off after power off and power on again?

The lights will undergo power-off protection when off, to avoid accidental damage to the internal precision components. After power on, it will conduct a self-check and enter the silent state. At this time, the lights are still off and need to be controlled by sending a signal through the control box.

Can Mictuning APP control multiple sets of C3 products at the same time?

Can not control at the same time, can only switch to control one set. If you want to control more than 8 pods light, you can do it through pairing.

Scan the QR code to download APP



Scan To Download
IOS APP



Scan To Download
Google APP





 ORGBW | C3 ROCK LIGHT

Thank you very much for purchasing
MICTUNING product

MICTUNING® All Rights Reserved

