




Remote Handle

for Feiyu Pocket 3

Instructions

V1.0

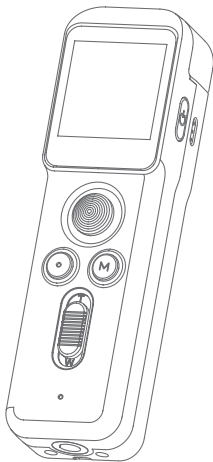

*This product needs to be used with Feiyu Pocket 3.



Catalogue

1. Overview	1
2. List	1
3. Start to Use	2
3.1 Charging	2
3.2 Connection	2
3.2.1 USB-C connection	2
3.2.2 Wireless connection	3
4. Operation	3
4.1 Power button	3
4.2 Joystick	3
4.3 Gimbal mode button	4
4.4 Shutter button	4
4.5 Zoom button	4
4.6 Screen Operation	4
4.7 Indicator light instructions	9
5. Specifications	9



Suggestion

This product includes below information, please read the information before using it.

- (1) Quick start guide
- (2) Online instruction
- (3) Tutorial

Tutorial

* The tutorial videos can be watched at FeiyuTech official website or scan the QR code.
<https://www.feiyu-tech.com/play/>



Download APP

Connect with FeiyuCam App to achieve more functions.

Scan the QR code to download the app, or search for "FeiyuCam" in the App Store or Google Play.

* Requires iOS 13.0 or above, Android 6.0 or above.



iOS




Android

* This product dose NOT include Feiyu Pocket 3.




1. Overview

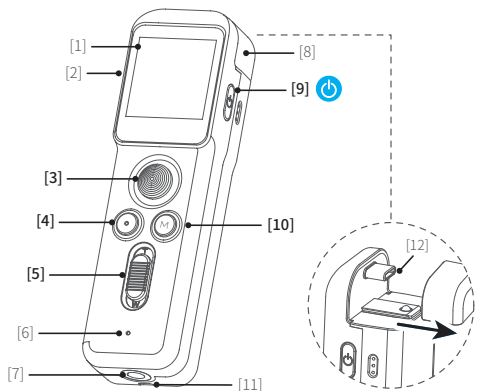

- | | |
|-------------------------|-----------------------------|
| [1] Touch screen | [7] 1/4 inch thread Hole |
| [2] USB-C charging port | [8] USB-C port cover |
| [3] Joystick | [9] Power button |
| [4] Shutter button | [10] Gimbal mode button |
| [5] Zoom button | [11] Wrist strap Hole |
| [6] Microphone | [12] Gimbal connecting plug |

2. List

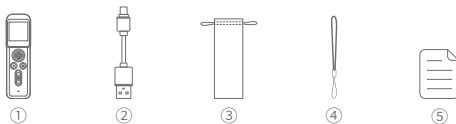

- | | |
|---------------------|-------------------|
| ① Remote Handle x 1 | ④ Wrist strap x 1 |
| ② USB-C Cable x 1 | ⑤ Manual x 1 |
| ③ Portable bag x 1 | |

3. Start to Use




- (1) Please fully charge the battery before powering on the product for the first time.
- (2) When not in use, power off the product.

3.1 Charging

Connect USB-C cable with charging port to charge.

We recommend that you charge your camera at least once a month.


Charging status	While working (screen status)	While off (indicator status)
Charging	 Display	Red light is on
Complete	 Disappear	Green light is on



3.2 Connection

3.2.1 USB-C connection


Put the dovetail slot which at the button of Feiyu Pocket 3 stabilized camera aim to the convex slot of remote handle, and slide in along the slot to connect the USB-C port. Then users can control the camera through the remote handle after power on.

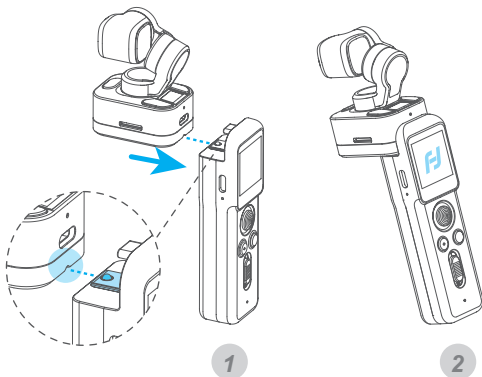

3.2.2 Wireless connection

Before using for the first time, please connect the remote handle with camera physically (Refer to 3.2.1), and power on.

Then detach the remote handle and the stabilized camera, and the screen on camera will prompt to enter wireless connection status, then the remote handle can control the camera wirelessly.

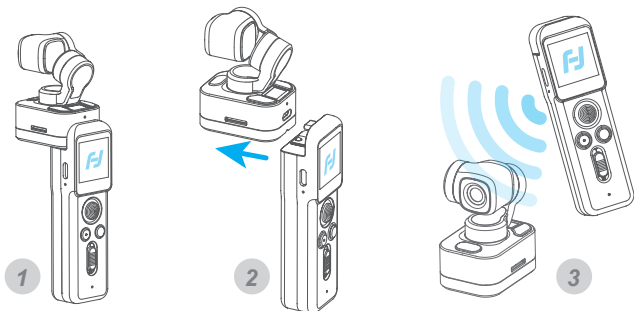

4. Operation

4.1 Power button

Long press for 1s: Power ON/ OFF

Long press for 8s: Power off forcibly

Single tap:

(1) Switch among video/ Photo mode/ Recently used function

(2) Return to the previous menu



4.2 Joystick

Push: Control the movement of the tilt and pan axes




4.3 Gimbal mode button

Single tap: Follow mode/All follow mode/Pan mode
(Switch in turn)

Double tap: Recenter

Triple tap: Enter/Exit selfie mode

Press and hold: Enter lock mode



4.4 Shutter button


Single tap: Start/stop recording/Take photo




4.5 Zoom button

Slide up (T): zoom in

Slide down(W): zoom out



4.6 Screen Operation

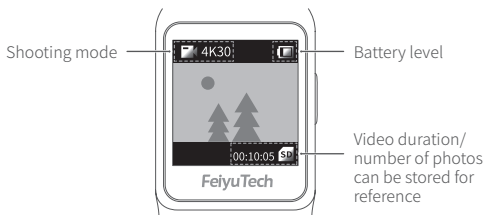



Swipe from right to left:

- Switch among different shooting modes and set corresponding mode parameters.
- Swipe up or down to switch among photo/ video/ slow-motion/ timelapse/ panorama mode, tap to enter corresponding mode setting.



Photograph

Users can set aspect ratio of photos and countdown to take photo.

Optional aspect ratio: 4:3 / 16:9

Optional countdown time: Off/ 3s/ 5s/ 7



Video

Users can set video resolution and FPS.

Optional video resolution: 4K / 2.7K / 1080P

Optional FPS: 24 / 25 / 30 / 48 / 50 / 60 / 120



Slow motion

Users can shoot slow-motion video.

Optional ratio of slow-motion recording: 4K 2X/1080P 4X/720P 8P



Time-lapse photography

Users can choose static, motion timelapse, or hyperlapse and enter shooting interface after chose, and set shooting interval and duration by tap the bottom of the interface.

Optional video resolution: 4K / 2.7K / 1080P

When you choose motion timelapse, tap to set start position , tap again to set end position , tap to delete position.



Panorama mode

Users can choose different panorama modes: 2×2/3×3/180°

2×2: two images above and two below combine to one picture

3×3: 3 images above in every three layers combine to one picture

180° : 3 lateral images combine to one picture



Swipe up:

- Enter gimbal control interface.
- Users can recenter gimbal / switch to selfie mode / modify follow sensitivity / switch working modes.

(1) Gimbal follow mode setting



Tap to recenter, lens return to center and keep towards front or back as before.



Follow mode



All follow mode (FPV)



Pan mode

(2) Selfie mode



Camera horizontally rotate 180° to shoot, which can be used to take selfie.



Swipe from left to right:

*Available only for USB-C connection

- Enter the album (Swipe down to exit)
- Swipe left/right to view the previous/next item. Swiping left on the most recent item will exit the album.



Play

Tap to play the current video.



Favorite

Photos and videos which are marked as like, can be viewed in album [Favorite] after connected Feiyu Cam App.
Tap to unmark.



Haven't
been
marked as
favorite yet

Tap to mark it as favorite.



Delete

Delete the current picture or video.



Swipe down:

*Available only for USB-C connection

- Enter setting interface, swipe up to return the previous menu.
- Swipe to left / right to switch among different settings.

(1) Mode setting		Mounting mode
		Handheld mode
(2) System		Swipe to left / right to get move settings.
		Display battery level
		Turn on/off camera Wi-Fi
		Anti-flicker setting
		Key tone on /off
		Display remaining storage spaces, tap to show format option.
		Auto power off setting
		Enter calibration. When camera is not level, users can use it to fix. Place the product on a stable horizontal plane such as table, and follow the prompts on the screen to operation.
		Average metering
		Spot metering is available
(3) Viewing angle		Move settings, users can switch languages / reset system parameters / view device information (firmware version, SN code, etc.)/motor calibration
		Super wide angle
		Wide viewing angle
		Narrow viewing angle
(4) Face tracking		Turn on/off face tracking(available in photo, video and slow motion modes)
(5) Beauty		Open beauty
		Close beauty (available in photo modes)



- (6) Image quality
-  Super high quality
 -  High quality (available in video and slow motion modes)
- (7) Display
-  Full screen display
 -  Normal display
- (8) Professional/
Normal mode
-  Professional Mode
 - Normal mode
 -  After switch to professional mode, users can tap **PRO** icon to set the related parameters.

Shooting mode	PRO mode				
Settings	Image Format	White balance	Exposure	Color	Volume
Photograph	✓	✓	✓		
Video		✓	✓	✓	✓
Slow motion		✓	✓	✓	
Time-lapse photography		✓	✓	✓	
Panoramic photo	✓	✓	✓		

Image Format: Select save format (JPG or J+R) for photo

White balance: Select a preset white balance mode or set color temperature manually

Exposure: Set ISO, shutter speed or exposure compensation


Color: Switch between normal color and Fy-log color (Which is advantageous for post-production color modulation)

Volume: Set video volume

- (9) Brightness
-  High brightness
 -  Normal brightness
 -  Low brightness
- (10) Saving
-  Save video
 -  Save photos and video

4.7 Indicator light instructions

Indicator light	Indicator status		Instructions	Status
	Photo indicator	Battery indicator		
 Green light	Flash once	-	Photograph	Power on
	Keeps flashing	-	Video	
	-	Constant green light	Finished charging	
 Red light	-	Battery indicator keeps on	Charging	Power off



5. Specifications

Product name Remote Handle for Feiyu Pocket 3

Product model FeiyuVCAM3SRH

Battery Capacity 750mAh

Charging Time About 1.2h

Weight About 73g

Product Size 105.3*30.8*23.1mm

Notice

1. Make sure motor spinning is not blocked by external force when the product is power on.
2. The product DO NOT contact water or other liquid if the product is not mark waterproof or splash-proof. Waterproof and splash-proof product DO NOT contact sea water or other corrosive liquid.
3. DO NOT disassembly the product except marked detachable. It need send to FeiyuTech after-sales or authorized service center to fix it if you accidently disassembly and cause abnormal work. The relevant costs are borne by user.
4. Prolonged continuous operation may cause the product surface temperature to rise, please operate carefully.
5. DO NOT drop or strike the product. If the product is abnormal, contact Feiyu After-sales support.

Storage and Maintenance

1. Keep the product out of the reach of children and pets.
2. DO NOT leave the product near heat sources such as a furnace or heater. DO NOT leave the product inside of a vehicle on hot days.
3. Please storage the product in dry environment.
4. DO NOT overcharge or overuse the battery, otherwise it will cause damage to the battery core. If does not use the product for a long time, please charge it at least once within one month.
5. Never use the product when the temperature is too high or too low.

Find More Features



Facebook



Youtube



Twitter



Instagram





This document is subject to change without notice.

If you have any questions about this document, please contact us by the following ways.

Manufactured by: Guilin Feiyu Technology Incorporated Company

Website: www.feiyu-tech.com

Tel: +86 773-2320865

E-mail: support@feiyu-tech.com

