

HCS-4842X4 64-Channel × 4 Portable Audio Distributor

Excellent solutions for conferences




HCS-4842X4 64通道×4便携式音频分配器 User's Manual
用户手册
V 1.0

TAIDEN INDUSTRIAL CO., LTD.



功能指示 / Functions and indications

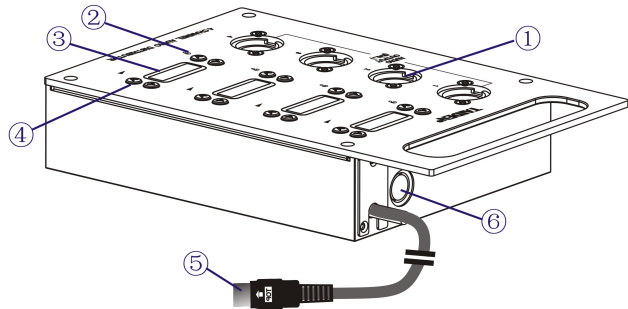

- ①音频输出接口（3芯XLR, 平衡输出）

②通道选择键

 - ◆ 通过∧、∨键选择语种通道，共64通道。

③OLED显示屏

 - ◆ 显示当前通道号、信号强度、语种名称和音量。

④音量调节键

⑤2.1米8P-DIN标准插头电缆

 - ◆ 连接会议主机或上一台HCS-4842X4。

⑥8P-DIN插座

 - ◆ 用于系统级联。
- ①Plug of audio output (3-pin XLR balanced output)

②Channel selector buttons

 - ◆ Select language channel by pressing ∧ or ∨ button, there are 64 channels at all.

③OLED screen

 - ◆ Display for current channel number, signal strength, language name and volume.

④Volume control buttons

⑤2.1 m cable with 8P-DIN plug

 - ◆ Connect to main unit or last HCS-4842X4.

⑥UPLINK,8P-DIN socket

 - ◆ For cascade connection.

技术参数 / Technical Specifications

频响.....	100 Hz - 15 kHz	Frequency response.....	100 Hz - 15 kHz
信噪比.....	≥68 dB	S/N.....	≥68 dB
音频输出.....	4×XLR, 平衡输出	Audio output.....	4×XLR Balanced output
	最大0 dBV		Max. 0 dBV
总谐波失真.....	≤0.5%	THD.....	≤0.5%
电源.....	DC 48V, 65 mA	Power supply.....	DC 48 V, 65 mA
尺寸.....	226×141×42 mm	Dimensions.....	226×141×42 mm
安装.....	嵌入式或挂壁	Mounting.....	Flush-mounting or wall-mounting
重量.....	1.0 kg	Weight.....	1.0 kg

系统连接图 / System Connection

HCS-4842X4是一台性能优良的音频通道分配器，采用全数字音频技术，内置高性能CPU，处理速度快，音质佳。具有64种语言通道，4路输出，每路输出都有独立的通道选择和音量调节按钮，OLED屏可显示当前通道号，语种名称及音量。带8P-DIN插口及插座，可通过手拉手连接方式扩展输出通道。

HCS-4842X4 is an audio channel distributor with excellent capability. It has superior acoustics and faster by using fully digital audio technology in combination with the built-in high performance CPU. It has 64 language channels for simultaneous interpretation and 4 audio outputs, each output is equipped with channel number, language and volume. With 8P-DIN plug and socket can be used to extend connection by "Daisy Chain" topology.

