

0.6kW Self-priming Jet Pump

Instructions for use

October 2022

Features & Benefits

- | | | |
|---------------------------|---------------------------------|---------------------------|
| ✓ 1-year Quality Warranty | ✓ Easy to operate | ✓ Dry running protection |
| ✓ NRCS approved | ✓ Automatic start/stop function | ✓ Over-current protection |
| ✓ Energy-efficient | ✓ Pre-wired with a 3-point plug | |

APPLICATIONS

	or or		
Pump 0.6kW	Bathrooms 1	Misting 30 Pop up 3 Impact 2	Dishwasher Yes Washing Machine Yes

+ Get the most out of your purchase!

- Add a **JoJo Pump Cover** to protect your pump from the elements and prolong its lifespan.
- Add a **JoJo Pump-to-Tank Connector Kit** for seamless connection from your pump to a JoJo water tank.

1-year Quality Warranty

JoJo pumps purchased from an approved JoJo retail outlet and/or distributor carry a 1-year warranty from the date of purchase. In order to maintain your warranty, always ensure you install, operate and maintain the pump as per the instructions provided in this manual.


Detailed T's and C's, as well as return policies and procedures are in the back of this manual.

Performance table

Pump specifications		Flow control switch	
Pump model	JSPM600	Model	SKD-2
Motor power	0.6kW	Input voltage	220V
Max. flow	40 lt/min	Frequency	50 Hz
Max. pressure	3.6 bar	Current	10 A
Max. fluid temperature	40 °C	Max. power	1500W 2HP
Max. ambient temperature	40 °C	Protection	IP 44
Max. suction lift	7m		

Best efficiency range

Flow range		Pressure range	
Lt/min	10 to 30 lt	Bar	2 to 3 bar

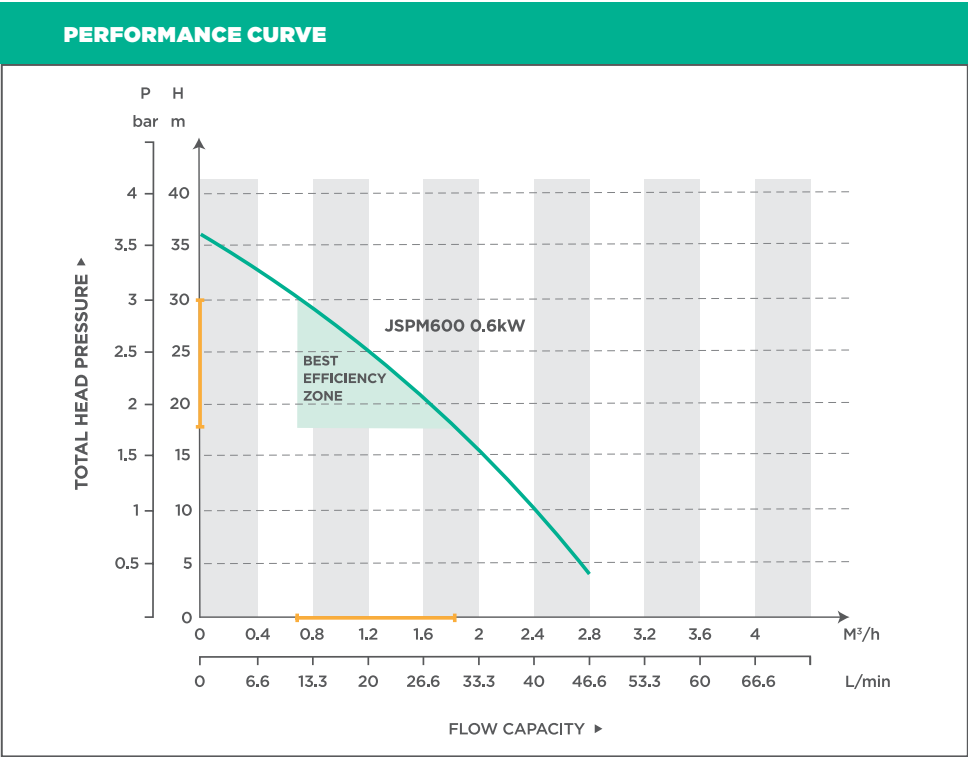


Additional pump details

Suction pipe (inches)	1" x 1"
Start-up amps (single phase)	8.5 A
Running amps (single phase)	2.7 A
Weight	13 kg
Dimensions:	
Length	438 mm
Width	196 mm
Height	235 mm

Construction characteristics	
Pump body	Polypropylene
Impeller	Noryl
Motor shaft	Stainless steel 304
Mechanical seal	Ceramic-graphite



PUMP DIAGRAM

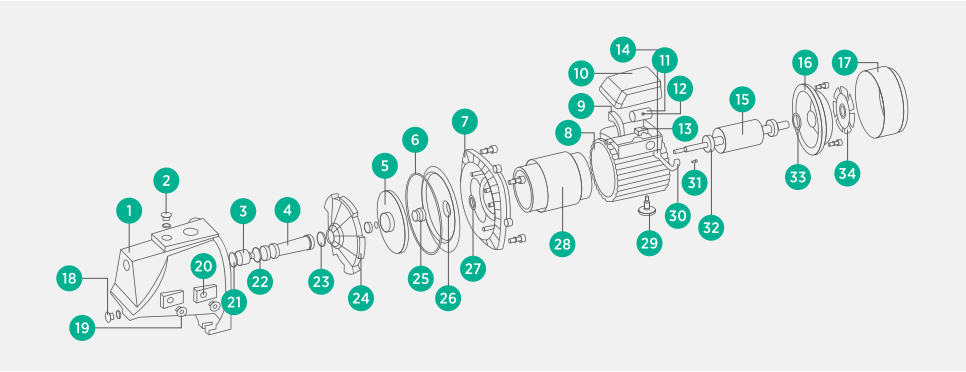

No.	Description	No.	Description	No.	Description	No.	Description
1	Pump body	10	Capacitor	19	Air vent screw	28	Stator
2	Air vent screw	11	Capacitor cover	20	O-Ring	29	Foot
3	Nozzle	12	O-Ring	21	O-Ring	30	Cable
4	Venturi	13	Cable fixer	22	O-Ring	31	Key
5	Impeller	14	Cable protector	23	O-Ring	32	Bearing
6	O-Ring	15	Rotor	24	Guide vane	33	Wave spring
7	Coupling	16	End cover	25	Mechanical seal	34	Fan
8	Motor bracket	17	Fan cover	26	Pump cover		
9	Terminal board	18	Water vent screw	27	Water proof ring		

i Important information

- The pump must be earthed with no strain placed on the electrical cable.
- All maintenance should be carried out with the power supply disconnected.
- The pump is only designed for clean water use i.e. water containing no solid particles. Pumping muddy water or water containing suspended solids will severely reduce the life expectancy of the unit.
- **Note:** this type of application falls outside of the factory warranty.
- Extending the cable will affect your factory warranty. Always make use of an approved extending plug adapter.
- The pump should be installed in a ventilated, undercover area to protect the unit against direct sunlight, rain and spray from an irrigation system. A JoJo pump cover is recommended for best protection.

Recommended suction pipes:	Recommended discharge pipe:
HDPE (minimum 1" or 25mm)	Copper, HDPE or any SABS approved piping (minimum ¾ inch or 22mm)
Helical coil reinforced flexible hose 1" or 25mm	

INSTALLATION

Foundation




The foundation should be solid enough to support the pump. It is recommended to secure the unit by bolting it to concrete or a paved surface.

Before building the foundation, take the following into consideration:


- The placement of the pump incl. the direction of inlet/outlet.
- The height - ensure that the water level in the tank is higher than the suction side of the pump.

Mounting



- Ensure the pump base is level so that the pump shaft is aligned horizontally.
- The pump suction line and fittings must all be on a horizontal plane.
- The discharge line and fittings must be on a vertical plane.


Piping




- The suction and discharge pipes should be supported independently by utilising pipe hangers and support blocks - this will prevent strain on the pump joints and casing.
- Before making a connection, always check the pipe alignment to ensure it is correct.
- The inlet and discharge pipe should align with the pump to ensure there are no bends or kinks that might affect the flow.
- The inlet and discharge pipe/connections must correspond with the design specifications of the pump as it may directly affect the efficiency and power consumption of the pump.
- The diameter of the suction and discharge pipe must be equal or greater than that of the ports of the pump.
- When being used as an alternative water supply for a home, install non-return valves to ensure no back pressure to the municipal supply or the pump.

OPERATING INSTRUCTIONS


It is advised to do the following to test the pump and ensure proper operation:

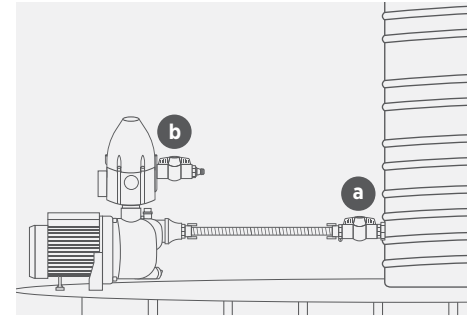


01. Check that the ball valve (a) between the tank and the pump is open and that the discharge valve (b) on the pump is closed. **Note:** it is always advised to install a ball valve between pump and tank for maintenance purposes.

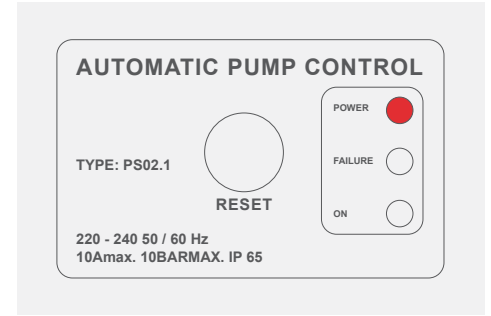

02. Insert the plug into the main power supply and switch the plug on. The power indicator light of the flow controller must be illuminated.

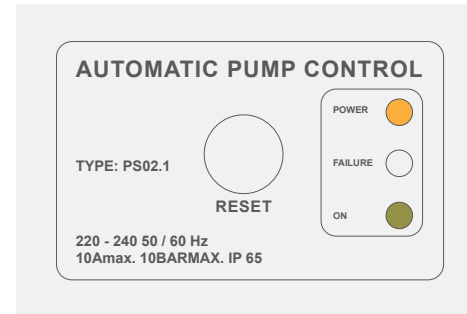


03. Open the discharge valve (b), the pump should start automatically.

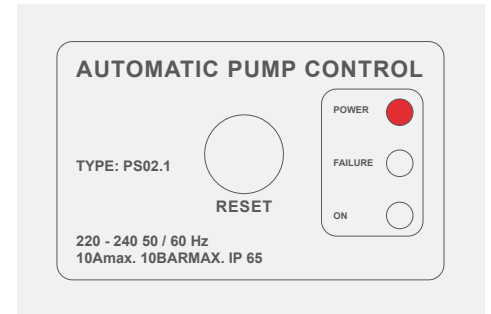


04. Close the discharge valve (b), the pump will switch off within 15 to 20 seconds (this is a built-in safety feature that protects the pump). **This tests the pressure controller operation.**

Operating instructions (continue on the next page)

Operating instructions (continued)

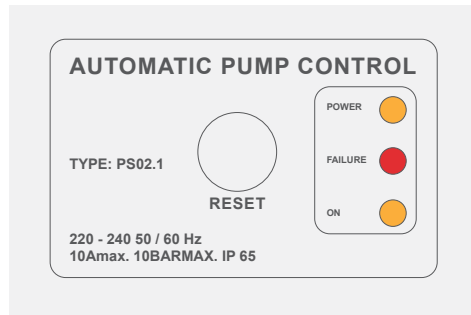

- 05.** Close the inlet valve (a) and open the discharge valve (b). The pump will switch on and run for 15 to 20 seconds. The pump should then stop operating and the failure light on the flow controller should be illuminated. **This tests the run dry operation.**

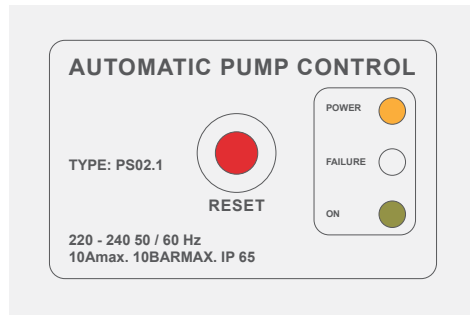

- 06.** Open the inlet valve (a) and press the reset button on the flow controller. The pump will start running. **After completing steps one to six, the pump will be ready for use.**

JOJO PUMP WARRANTY

Please read this warranty in conjunction with the South African Consumer Protection Act 68 of 2008.

- JoJo warrants its pumps to the original end user/purchaser to be free of defective materials and workmanship under normal use for a period of 12-months from the date of purchase from authorised retailers and distributors. To be eligible for warranty repair or replacement, the pump must be returned to the point of purchase during and up to the expiry date of the warranty period. Proof of date of purchase is required.
- Liability in terms of this warranty shall be limited to repair or replacement of the pump. Liability for all and any other losses and/or subsequent damages suffered are expressly excluded.
- This warranty does not obligate JoJo to bear any cost of removal, installation, transportation, or other charges which may arise in connection with a warranty claim.
- The warranty shall not apply to repairs or service necessitated by normal wear and tear or for lack of reasonable and proper maintenance.

This warranty does not apply if in the sole judgement of JoJo the product or any of the components have been;

- Tampered with, disassembled (unless as per JoJo's specific instructions relevant to peripheral pumps and clearly displayed on fan cover), repaired or altered (except as may be pre-authorised by JoJo in writing);
- Subjected to misapplication, misuse, neglect or accident; or
- Used to pump anything for which the pump was not designed. Such use may compromise or harm the pump and/or any of its components.

IMPORTANT: this is the exclusive warranty given by us and no other warranty or guarantees, expressed or implied shall be of any force or effect. No distributor or other person is authorised to assume any liability or obligated for JoJo other than expressly provided herein.

RETURN POLICIES AND PROCEDURES

Refunds

Within 5 days of purchase; as part of the cooling off clause (section 16 of the CPA), the pump may be returned for refund, provided that it is still within the original packaging, unused, and in the original condition.

Within 10 days of purchase; the pump may be returned for refund or replacement if it does not meet the purpose for which intended (section 20 of the CPA) I provided that it is still within the original packaging, unused, and in the original condition. In such instance the pump will be returned to JoJo for an evaluation, after which an inspection report will be provided confirming whether it meets the necessary requirements for refund or replacement.


Returns/repairs

Within 12 months; should the pump not operate as specified, or cease to do so within 12 months after being purchased, the return procedure is as follows:

- Return the pump to the store from which purchased,** together with the proof of purchase (to confirm that it is within the 12-month warranty period). Please ensure that the condition of the pump is as specified in section four of this warranty, and that it is still packed in the original packaging.
- The store will send the pump to the nearest JoJo factory for an evaluation.**
- At JoJo's election, **(a) the pump will either be repaired** (if repairable) which repairs shall be and warranted for three months, or the balance of the 12-month period, whichever period is longer; **or (b) the pump will be exchanged** (this only applies if the pump is non-repairable, and a replacement pump in similar visual condition will be provided by JoJo).
- The evaluation (once the pump is sent back to JoJo), repair/exchange and delivery to the store will take place within 14 days.

Our return/repair request form is available on our website at www.jojo.co.za.

+ Get the most out of your purchase!




- Extends the lifespan of your Booster Pump
- Reduces noise
- UV-resistant
- Corrosion-resistant
- Available in our water tank colours



- Easy to use
- DIY-friendly
- All accessories included
- Great quality
- Suitable for use with our 0.37, 0.55, 0.6 and 0.75kW Booster Pumps



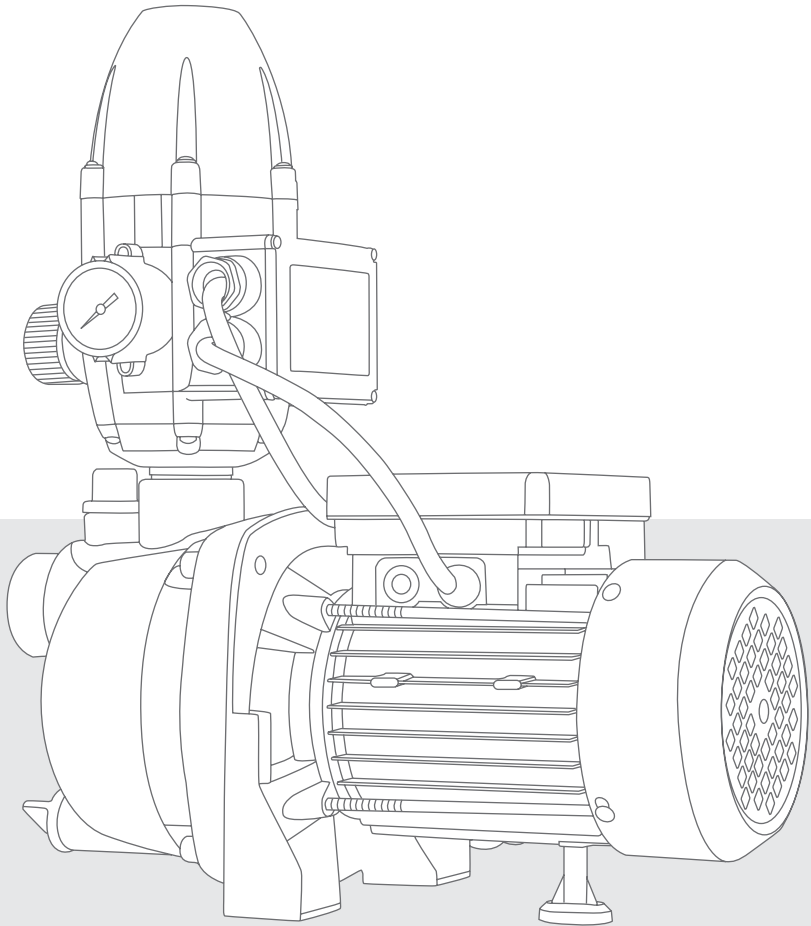

Thank you for choosing JoJo. If there is anything that you are unsure about or need assistance with, please do not hesitate to contact us.

www.jojo.co.za | +27 11 695 8300

JoJo
FOR WATER FOR LIFE

